


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

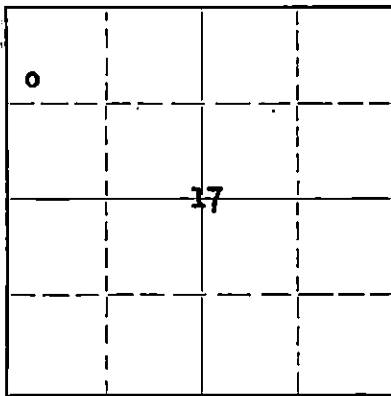

Locate well correctly on above
Section Plat

BARTON County, Sec. 17 Twp. 16S Rge. (E) 11 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW NW NW
Lease Owner SHELL OIL COMPANY
Lease Name F. F. OESER Well No. 3
Office Address BOX 744, GREAT BEND, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) OIL
Date well completed AUGUST 2 1941
Application for plugging filed APRIL 14 1953
Application for plugging approved APRIL 16 1953
Plugging commenced MAY 12 1953
Plugging completed MAY 16 1953
Reason for abandonment of well or producing formation OIL DEPLETED

If a producing well is abandoned, date of last production MARCH 21 1953
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well C. D. STOUGH
Producing formation ARBUCKLE Depth to top 3293 Bottom Total Depth of Well 3306 Feet
Show depth and thickness of all water, oil and gas formations. PB 3303; 3194; & 3070

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
ARBUCKLE	I.P. 1296 OIL & 530 WTR/24 HOURS	3294	3303	8 5/8"	331'	None
				1 1/2"	3294'	1013'
				3 1/2"	3228'	1020'
LANSING-KANSAS CITY	I.P. 8 OIL & 8 WTR/24 HOURS	3177	3183			
" " "	I.P. 0 OIL & .58 WTR/24 HRS 3-21-53.	3043	3050			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- (1) PLUG BACK 3306-03 WITH 3/4 SACK CALSEAL
- (2) JUNK AND CAVINGS 3303-3215. CLEAN OUT TO 3230. CEMENTED 3 1/2" CASING AND DRILLED CEMENT TO 3194.
- (3) SET BRUSH PLUG AT 3100. PLUGGED BACK WITH GRAVEL TO 3079 AND DUMPED 1 SACK CEMENT TO 3070.
- (4) PLUG BACK FROM 3070 TO 3000 WITH ROCK AND 2 SAK CEMENT. MUDDED HOLE, SET ROCK BRIDGE AT 300' AND DUMPED 20 SAK CEMENT. MUDDED HOLE AND CAPPED INTO CELLAR WITH 10 SAK CEMENT.

RECEIVED
MAY 27 1953
5-27-53
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor FORBES CASING PULLING COMPANY
Address GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, SS.
S. S. MABRY (employee of owner) ~~(conservation agent)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S. S. Mabry
BOX 744, GREAT BEND, KANSAS
(Address)

SUBSCRIBED AND SWORN to before me this 25th day of MAY, 1953.

My commission expires APRIL 11, 1956
Almont Byers, Jr. Notary Public.

PLUGGING
FILE SEC 17 T 16 R 11W
BOOK PAGE 93 LINE 30

SHELL-F. F. OESER #3
SW NW NW Section 17-16S-11W
Kraft-Prusa Field
Barton County, Kansas

CASING RECORD

8 5/8" cem 331 with 115 sax
4 1/2" cem 3294 with 100 sax
3 1/2" cem 3228 with 75 sax
Casing perforations: 3177-83 and 3043-50.

- 0 - 30 shale & lime
- 120 sand & gravel
- 266 shale & lime
- 310 shale
- 335 shale & red rock
- 480 shale, sand & lime streaks
- 700 red shale
- 730 anhydrite
- 790 shale
- 970 shale & lime
- 1150 shale & lime streaks
- 1340 salt & shale
- 1385 shale & lime streaks
- 1627 shale & lime
- 1775 shale, lime & chert
- 1850 shale & lime
- 2113 lime
- 2584 shale & lime
- 3291 lime
- 3293 conglomerate
- 3306 dolomite T.D.
- 3070 FBTD

Formation Tops
Topeka 2657
Lansing-Kansas City 3018
Sooy Conglomerate 3291
Arbuckle 3293

LB

RECEIVED
STATE CORPORATION COMMISSION

APR 16 1953

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 17 T 16 R 11W
BOOK PAGE 93 LINE 30