


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

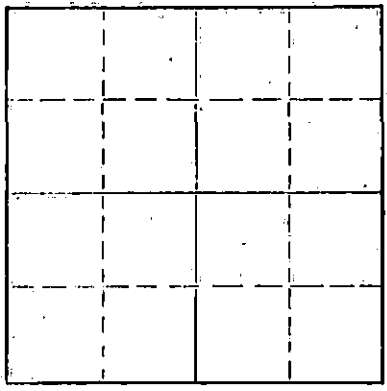

Locate well correctly on above Section Plat

Russell County. Sec. 10 Twp. 15 Rge. 14 (E) W (W)  
Location as "NE/CNW/SE" or footage from lines EN1/2 N1/2 SE  
Lease Owner Spector Pipe and Supply Inc.  
Lease Name Boxberger "B" No. 6 Well No. 6  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed 3-8-55 \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed April 1, 1966 \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved April 2, 1966 \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced April 7, 1966 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed April 16, 1966 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation failure to produce profitably  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan  
Producing formation Arbuckle Depth to top 3199 Bottom 3200 Total Depth of Well 3202 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE      | PUT IN  | PULLED OUT |
|-----------|---------|------|----|-----------|---------|------------|
|           |         |      |    | 8 5/8" OD | 755 ft. | none       |
|           |         |      |    | 5 1/2" OD | 3200'   | 2499 ft.   |
|           |         |      |    |           |         |            |
|           |         |      |    |           |         |            |
|           |         |      |    |           |         |            |
|           |         |      |    |           |         |            |
|           |         |      |    |           |         |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged Back 3180 feet and dumped 5 sacks cement. Set rock bridge at 300 feet and dumped 35 sacks of cement. Filled up hole to 30 feet and dumped 15 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 2 - 1966  
CONSERVATION DIVISION  
Wichita, Kansas

5-2-66

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lynch Casing and Pulling Co.  
Address R. R. T. 4, Great Bend, Kansas

STATE OF Kansas COUNTY OF Russell ss.  
Spector Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 28<sup>th</sup> day of April, 1966.

My commission expires March 9 - 1970

W. W. [Signature]  
Notary Public.

15-167-03524-0000

copy


WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY  
503 East Murdock, Wichita, Kansas

Company-NATIONAL COOPERATIVE REFINERY ASSOCIATION  
Farm-Boxberger "B" No. 6

SEC. 10 T. 15 R. 11W  
CN $\frac{1}{2}$  N $\frac{1}{2}$  SE

Total Depth. 3202'  
Comm. 2-22-55 Comp. 3-6-55  
Shot or Treated.  
Contractor.  
Issued. 4-30-55

County Russell  
KANSAS



Elevation. 1755 KB  
Production. 51 BOPD

CASING:  
10 3/4" 755' w/370 sx cem.  
5 1/2" 3200' 2/150 sx cem.

Figures indicate Bottom of Formations.

|              |      |
|--------------|------|
| shale        | 150  |
| red rock     | 175  |
| shale-shells | 340  |
| red bed      | 660  |
| red rock     | 750  |
| Anhydrite    | 780  |
| shale-shells | 1200 |
| salt         | 1405 |
| shale-shells | 1540 |
| lime-shale   | 1920 |
| shale-shells | 2332 |
| sand         | 2385 |
| shale-shells | 2600 |
| lime-shale   | 2815 |
| lime         | 2880 |
| lime-shale   | 2982 |
| lime         | 3125 |
| lime-shale   | 3180 |
| lime         | 3199 |
| Arbuckle     | 3202 |
| Total Depth  |      |

|             |      |
|-------------|------|
| TOPS: Scout |      |
| Anhydrite   | 750  |
| Heebner     | 2886 |
| Toronto     | 2904 |
| Lansing     | 2949 |
| Arbuckle    | 3199 |

RECEIVED  
STATE CORPORATION COMMISSION

APR 5 1966

CONSERVATION DIVISION  
Wichita, Kansas