

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Reno County, Sec. 19 Twp. 24 Rge. 7 (E) W (W)

Location as "NE/CNW/SW" or footage from lines W/2 NW/4

Lease Owner Tomlinson-Kathol, Inc.

Lease Name Lincheid "A" Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 7-7-64 19

Plugging completed 7-9-64 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

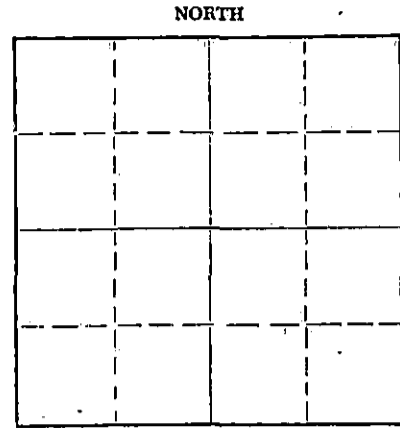

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3524 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	192'	None
				8-1/2"	3518'	2977'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3520', sanded to 3500' and dumped 5 sacks of cement @ 3500' with dump bailer. Pulled 5 1/2" casing, set rock bridge from 180' to 160' and dumped 20 sacks of cement @ 160'. Mudded hole to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

JUL 23 1964

PLUGGING COMPLETE.

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss:

Noel J. Knight (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of July, 1964

Milton J. Volin
Notary Public.

My commission expires May 20, 1968

WELL LOG BUREAU KANSAS GEOLOGICAL SOCIETY
508 E. Murdock, Wichita, Kansas


COPY

Company - GEO. B. SIEGRIST
Farm - Lindschield No. A-1

SEC. 19 T. 24 R. 7N
NW NW NW

Total Depth. 3524
Comm. 1-19-49 Comp. 2-5-49
Shot or Treated.
Contractor. Stag Drlg.
Issued. 3-4-50

County. Reno
KANSAS



Elevation.

Production. Pot. 50 bbls

CASING:
8 5/8" 192'
4 1/2" 3522.84'

Figures Indicate Bottom of Formations.

surface soil	42
sand gravel	75
shale shells	145
red bed	185
shale, shells	200
red bed	440
anhyd.	460
shale, shell	1130
lime, shale	1215
lime	1245
lime, shale	1310
lime	1335
shale, sand, lime	1438
shale, shells	1450
lime, shale	1520
lime	1650
lime, shale brkn	1690
lime, shale	1700
lime	1780
lime, shale	2265
lime	2370
lime, shale	2575
shale	2695
lime	3050
lime, shale	3150
lime	3522
lime (pay)	3524
Total Depth	

* All measurements from top of rotary bushing.

Tops:

Heebner shale	3017-19
Lansing lime	3188
Lime sft sdy	3301-06
Lime oolitic	3367-72
lime oolitic	3389-93
lime Bkrn, shells	3431-35
lime oolitic	3522-24

Remarks:
3017-19, Heebner shale, blk carbonaceous, finely laminated sft shale.
3188-lgt gry, fine klyn nonporous lime.
3301-06, sft sdy lime, slight stains, no odor.
3367-72, oolitic lime, small amt porosity, 5% saturated, no odor.
3389-93, oolitic lime, very poor porosity slight stains, no odor.
3431-35, brkn lime, shells; lost circulation no saturation.
3522-24, oolitic lime, very porous, very good saturation, good odor, 1 1/2 hr sample was best.
* All measurements from top of rotary drive bushing.
Cement drilled to 3524 (rotary meas)
2500' oil in hole - 1 hr. Clean out.

RECEIVED
STATE CORPORATION COMMISSION

AUG 13 1965

CONSERVATION DIVISION
Wichita, Kansas