


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

Kingman County, Sec. 23 Twp. 30 Rge. 9 (E) W (W)
Location as "NE/CNW*SW*" or footage from lines Gen. NE NE SE
Lease Owner Cities Service Oil Company
Lease Name Deppenbusch Well No. 1
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 27, 1956
Application for plugging filed March 27, 1956
Application for plugging approved March 27, 1956
Plugging commenced March 27, 1956
Plugging completed March 27, 1956
Reason for abandonment of well or producing formation Dry Hole

NORTH

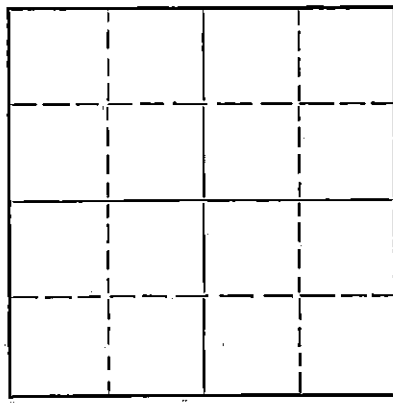

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production ----- 19---
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation Arbuckle Depth to top 4699 Bottom 4749 Total Depth of Well 4749 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	313'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4749-300', mud.
300-240', wood plug, hulls and 20 sacks cement.
240-35', mud.
35' to base of cellar, wood plug, hulls and 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barbour Drilling Company
Address Tulsa, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss.
V. M. Conover (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. M. Conover
Box 751, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of April, 19 56

My commission expires March 12, 1959.

W. J. Smith
Notary Public.
APR 4 1956
CONSERVATION DIVISION
Wichita, Kansas
4-4-56

PLUGGING
FILE SEC 23 T 30 R 9W
BOOK PAGE 49 LINE 16

WELL RECORD

Company Citizen Service Oil Company Well No. 1 Farm Deperbusch
 Location 330' South and 330' West of E/4 Cor. Sec. 23 T. 30 R. 9W
 Elevation 1567 (1504 Cr.) County Kingsan State Kansas
 Drlg. Comm. March 6, 1956 Contractor Barbour Drilling Company
 Drlg. Comp. March 27, 1956 Acid None
 T. D. 1719' Initial Prod. Dry Hole - P. & A. 3-26-56

CASING RECORD:

8-5/8" O 313' cen. with 250 ext cen.

FORMATION RECORD:

surface soil	0-20
sand	45
red bed	913
red bed & shale	920
shale & shells	1120
anhydrite	1150
shale & lime shells	1250
shale & lime	1690
lime	1820
lime & shale	2325
shale	2490
shale & lime	2605
lime	2690
lime & shale	3016
lime	3255
lime & shale	3286
lime & sand	3355
shale	3500
lime	4155
lime & shale	4224
chert	4254
lime	4270
cherty lime	4295
lime	4320
lime & shale	4315
shale, lime & chert	4376
cherty lime	4392
lime	4406
lime & shale	4476
shale & lime	4522
lime	4562
cherty lime	4575
lime	4580
shale & sand	4605
sand	4635
sand & shale	4690
lime	4719 T. D.

Hebner	3297'
Dodge	3313'
Douglas	3329'
Lansing	3488'
Mississippi	4223'
Kinderhook	4412'
Viola	4516'
Simpson Shale	4577'
Simpson Sand	4588'
Arbuckle	4699'
Penetration	50'
Total Depth	4719'

Drill stem test 4224-35, open 1 hr., recovered 105' gas-cut, slightly oil specked mud; B. H. P. 390#/30 mins.

Drill stem test 4335-54, open 1 hr., recovered 160' gas-cut and slightly oil-cut mud; B. H. P. 710#/30 mins.

Drill stem test 4255-70, open 1 hr., gas in 13 mins., recovered 55' slightly oil mottled greasy mud and 150' muddy salt water; B. H. P. 1450#/30 mins.

Drill stem test 4517-22, open 1 hr., recovered 2814' sulphur water; B. H. P. 1850#/30 mins.

SLOPE TESTS: (SYFO)

500'	0°
1000'	0°
1500'	0°
2000'	1°
2500'	1°
3000'	0°
3500'	0°
4000'	1°

RECEIVED
 DIVISION OF
 OIL & GAS
 KANSAS

PLUGGING
 FILE SEC 23 T 30 R 9W
 BOOK PAGE 49 LINE 16