

**Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission,
800 Bitting Building,
Wichita, Kansas**

15-079-19142-0000

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-

Strike out upper line when reporting plugging off formations.

NORTH

A blank 4x4 grid of squares, intended for drawing a 3D object.

**Locate well correctly on above
Section Plat**

Harvey County. Sec. 24 Twp. 22 Rge. 2 (X) (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines S $\frac{1}{2}$ N W $\frac{1}{4}$
Lease Owner. Henry Bennett
Lease Name. Ewy Well No. 1
Office Address. Augusta, Kansas.
Character of Well (Completed as Oil, Gas or Dry Hole). Gas
Date, well completed. 19
Application for plugging filed. 3/4/ 1939
Application for plugging approved. 3/4/ 1939
Plugging Commenced. 3/4/ 1939
Plugging Completed. 3/22/ 1939
Reason for abandonment of well or producing formation exhausted
If a producing well is abandoned, date of last production 193
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Guy Werthing
Producing formation..... Depth to top..... Bottom..... Total Depth of Well 3490 Feet
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

[illegible]

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet tofeet for each plug set.

Plugged back from Bottom at 3490' to 3142' with cement & lead wool.
Filled with heavy mud between plugs from 3142' to top of hole.
Plug & cement from 2960 to 2945. Plugged with rock & 15' of cement
below fresh water at 200'.
Plug & 10' of cement at base of cellar.

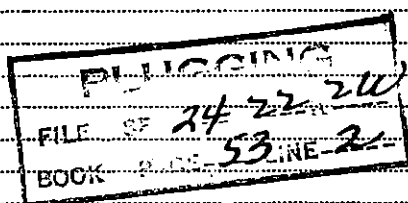

(If additional description is necessary use BACK of this sheet)

Correspondence regarding this well should be addressed to Henry Bennett,
Address Augusta, Kansas.

STATE OF _____, COUNTY OF _____, ss.

.....(employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.


(Signature) H. J. Jensen

SUBSCRIBED AND SWORN to before me this 24th day of March, 1939. (Address)

My commission expires August 1, 1942 Notary Public

J. J. EWY LEASE

<u>DESCRIPTION OF MATERIAL</u>	<u>RUN</u>	<u>PULLED</u>	<u>LEFT IN</u>	<u>CEMENT RECORD</u>	<u>QUANTITY</u>
	<u>WELL NO. 1</u>				
20" 90# Lapweld Casing	125'	0	125'		
15 $\frac{1}{2}$ " 70# Lapweld Casing	290'	290'	0		
13-3/8" 48# Seamless Steel Casing	1,448'	1,448'	0		
10" 45# Seamless Steel Casing	2,472'	0	2,472'	12 Sacks	
* 8 $\frac{1}{4}$ " 32# Seamless Steel Casing	3,169'	0	3,169'	70 Sacks	
7" 24# Seamless Steel Casing	3,470'	3,470'	0		
10" TP Casing Shoe	1	0	1		
8 $\frac{1}{4}$ " TP Casing Shoe	1	0	1		
2" 4.7# USE Seamless Steel Tubing					3,010'
10"x1 $\frac{1}{4}$ "x8"x46" Casing Clamps					1
*This well was plugged back to 8 $\frac{1}{4}$ " casing w/ mud, then plugged in 8 $\frac{1}{4}$ " casing with lead wool and cement to 3,142', then perforated casing to 2,966'					
10" x 8-5/8" SS Swage Nipple					1
10" x 7" Do					1
8 $\frac{1}{4}$ " x 12" Casing Nipple					2
8 $\frac{1}{4}$ " Hindiliter SR Casing Spider with slips					1
8 $\frac{1}{4}$ " x 5'8" Clamping up nipple					1
8 $\frac{1}{4}$ " x 3'3" Casing Nipple					1
8 $\frac{1}{4}$ " 1250# WP Crane SE Gate Valve					1
8 $\frac{1}{4}$ " Casing Head and Tubing Support					1
8 $\frac{1}{4}$ " x 3" RT Packer					1
8 $\frac{1}{4}$ " x 19" Drilling Nipple					1
7" Casing - Junk					115'
4" Line Pipe					91'
3" Line Pipe					100'
3" Std. Merco Plug Valve					1
3" 250# IB SE Gate Valve					1
3" 700# IB SE Gate Valve					1
3" 1000# Hydro Seal Valve					1
2" Line Pipe					328'
2" 1200# WP Orbit Manifold Valve					1
2" #2734 Merco Plug Valve					2
2" 1000# KH Plug Valve					2
2" 1600# IB SE Gate Valve					1
2" 2000# IB SE Gate Valve					1
2" Kerotest Steel Gate Valve					1
2" Standard Merco Plug Valve					3
72' Ideco Steel Derrick w/ 2 $\frac{1}{2}$ " Relegs and safety steel platform					1
2' x 9' National HP Separator #419					1

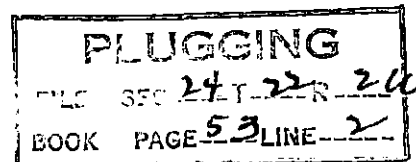

A ÷ NW ¼ 24-22-2 (Barney County)