


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail: Deliver Report to:
Conservation Division
State Corporation Commission
1111 No. Broadway
Wichita, Kansas

15.081.1013.00.00
WELL PLUGGING RECORD

Haskell County, Sec. 8 Twp. 30 Rge. 33 (E) W (W)

T - 30 NORTH R - 33W

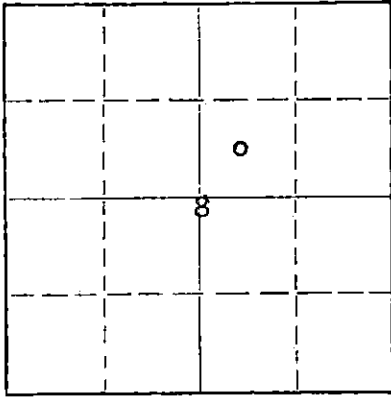

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines C SE NE
Lease Owner ~~XXXXXX~~ Pan American Petroleum Corporation
Lease Name Correll Gas Unit Well No. 1
Office Address ~~XXXXXX~~ Box 507, Ulysses, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) ~~XXXX~~ Dry Hole
Date well completed 3-12-62 19__
Application for plugging filed 10-8-63 19__
Application for plugging approved 10-9-63 19__
Plugging commenced 10-28-63 19__
Plugging completed 10-30-63 19__
Reason for abandonment of well or producing formation ~~XXXXXX~~ No commercial quantities of oil or gas present.
If a producing well is abandoned, date of last production None 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott /PBD
Producing formation None Depth to top _____ Bottom _____ Total Depth of Well 4800 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO PS	SIZE	PUT IN	PULLED OUT
Council Grove			2927	8-1/4"	768'	None
Pennsylvanian			3312	5-1/2"	4875'	1784'
Toronto			4106			
Missouri			4154			
Lansing			4182			
Des Moines			4773			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to plug back @ 4875' and dumped 15 sacks of cement with dumpbailer. Pulled 5 1/2" casing to 700' and pumped in 35 sacks of cement @ 700'. Pulled balance of 5 1/2" casing, mudded hole from 600' to 50', set rock bridge to 40' and ran 15 sacks of cement to cap well.

RECEIVED
STATE CORPORATION COMMISSION

DEC 24 1963

CONSERVATION DIVISION
Wichita, Kansas

12-24-63

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY License # 436
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (~~XXXXXX~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of November, 1963.

Milton J. Volin
Notary Public

My commission expires May 20, 1964

DEC 24 1963
WICHITA, KANSAS

PAN AMERICAN PETROLEUM CORPORATION

WELL RECORD

SUPPLEMENTAL (ENTER "X" WHEN APPLICABLE)

Grid for well location mapping

LEASE Correll Gas Unit WELL NO. 1
LOCATION OF WELL: 1980 FT. NORTH SOUTH OF THE NORTH SOUTH LINE AND 1980 FT. EAST WEST OF THE EAST WEST LINE OF THE SE 1/4 NE 1/4
OF SECTION 8 TOWNSHIP 30 NORTH SOUTH RANGE 33 EAST WEST.
Haskell Kansas
COUNTY STATE
ELEVATION: ND 2970 DF 2968 GL 2962
COMPLETED AS: OIL WELL GAS WELL WATER WELL DRY HOLE
DRILLING COMMENCED 2-1 1962 COMPLETED 3-12 1962

LOCATE WELL CORRECTLY

OPERATING COMPANY Pan American Petroleum Corporation ADDRESS Box 507, Hlyssas, Kansas

OIL OR GAS SANDS OR ZONES

Table with columns: NAME, FROM, TO, NAME, FROM, TO. Rows include Council Grove, Pennsylvania, Toronto, Missouri, Lansing, Des Moines.

WATER SANDS

Table with columns: NAME, FROM, TO, WATER LEVEL, NAME, FROM, TO, WATER LEVEL. Rows 1 and 2.

CASING RECORD (OVERALL MEASUREMENT)

LINER SCREEN RECORD

Table with columns: CSO. SIZE, WEIGHT, DESCRIPTION, MAKE - GRADE, QUANTITY FEET, SIZE, QUANTITY FEET, SET AT TOP, BOTTOM, MAKE AND TYPE. Rows for 8-5/8" and 5-1/2" casing.

PACKER RECORD

Table with columns: SIZE, LENGTH, SET AT, MAKE AND TYPE.

CEMENTING RECORD

MUDDING RECORD

Table with columns: SIZE, WHERE SET FEET, SACKS, CEMENT BRAND, TYPE, METHOD, FINAL PRESS, METHOD, RESULTS. Includes a RECEIVED stamp from the State Corporation Commission dated DEC 24 1962.

WHAT METHOD WAS USED TO PROTECT SANDS WHEN OUTER STRINGS WERE PULLED?

WERE BOTTOM HOLE PLUGS USED?

IF SO. STATE KIND, DEPTH SET, AND RESULTS OBTAINED

ROTARY TOOLS WERE USED FROM 0 FEET TO 4875 FEET, AND FROM FEET TO FEET

CABLE TOOLS WERE USED FROM For Completion FEET TO FEET, AND FROM FEET TO FEET

24-HOUR PRODUCTION OR POTENTIAL TEST

WATER BBLs.

IF GAS WELL, CUBIC FEET PER 24 HOURS Dry Hole SHUT-IN PRESSURE LBS. PER SQUARE IN.

I, THE UNDERSIGNED, BEING FIRST DULY SWORN UPON OATH, STATE THAT THIS WELL RECORD IS TRUE AND CORRECT ACCORDING TO THE RECORDS OF THIS OFFICE AND TO THE BEST OF MY KNOWLEDGE AND BELIEF.

SUBSCRIBED AND SWORN TO BEFORE ME THIS 21 DAY OF March 1962 NAME AND TITLE Area Supt. MY COMMISSION EXPIRES December 3, 1964

NOTARY PUBLIC R. W. Banks

FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Sand-clay	0	346			
Sand-clay-redbed	346	758			
Redbed	758	801			
Redbed-shells	801	1843			
Shale-lime	1843	2565			
Lime	2565	3363			
Lime-shale	3363	3427			
Lime	3427	3770			
Lime-chalk stks.	3770	3915			
Lime	3915	4875			
Total Depth	4875				