

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 B.F. Building
Wichita, Kansas

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Reno County. Sec. 21 Twp. 23 Rge. 10 (E) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines NE SE NW

Lease Owner Republic Natural Gas Company

Lease Name Yust Well No. #1

Office Address Ellinwood, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 12, 1941

Application for plugging filed October 12, 1941

Application for plugging approved October 12, 1941


Plugging commenced October 12, 1941

Plugging completed October 12, 1941

Reason for abandonment of well or producing formation Dry hole.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

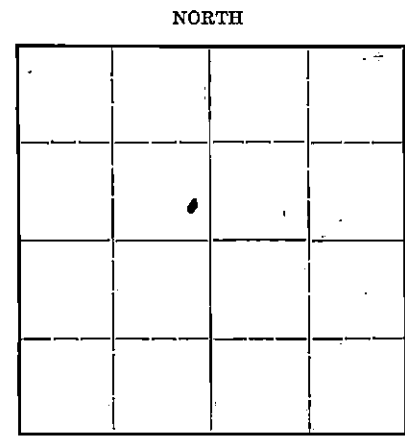

Name of Conservation Agent who supervised plugging of this well Mr. Durkee, McPherson, Kansas

Producing formation Depth to top Bottom Total Depth of Well 3808 1/2 Feet

Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. Row 1: 8 5/8", 185'-8", No.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 159' feet to 185' feet for each plug set.

The hole was filled with heavy mud and a wood plug was driven to the bottom of the 8 5/8" surface casing, and 10 sacks of cement placed above the wooded plug. 5 sacks of cement were placed at the surface in the top of the casing and a steel plate welded over the top of the 8 5/8" casing.

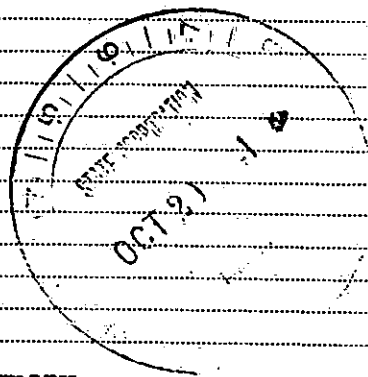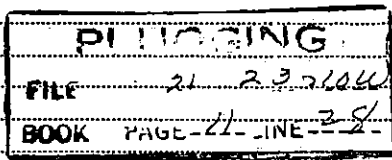

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Republic Natural Gas Company Box 918, Ellinwood, Kansas 10-20-41

STATE OF Kansas, COUNTY OF Barton, ss. M. E. Tolleson (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. E. Tolleson Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 16th day of Oct., 1941

Alvan J. Robinson, Notary Public.

My commission expires Dec. 29, 1942.

DRILLING LOG

15-155-02868-0000

REPUBLIC NATURAL GAS COMPANY

Lease Yust
Well No. 1

County Reno
Sec. 23 Twp. 21 Rge. 10
Location _____
Elevation _____

Total Depth 3308 1/2
Comm. 9-22-41 Comp. 10-12-41
Shot or Treated _____

CASING: 8 5/8" set at 185'-8"


Contractor Mitchell Drilling Co.
Rotary T. D. _____
Cable Tools From _____ To _____

Figures Indicate Bottom of Formations:

0 - 185	Sand and clay	3270 - 3343	Lime
185 - 230	Red beds	3343 - 3385	Lime
230 - 300	Sand	3385 - 3422	Lime
300 - 640	Red beds	3422 - 2472	Lime
640 - 1100	Shale and shells	2472 - 3511	Lime
1100 - 1135	Shale	3511 - 3527	Lime
1135 - 1260	Salt and shale	3527 - 3584	Lime
1260 - 1320	Shale and shells	3584 - 3622	Lime
1320 - 1390	Shale and Anhydrite	3622 - 3640	Lime, chert and shale
1390 - 1470	Shale and shells	3640 - 3657	Shale
1470 - 1530	Broken Lime	3657 - 3669	Chert and Lime
1530 - 1650	Lime	3669 - 3677	Chert
1650 - 1765	Broken Lime	3677 - 3679	Chat
1765 - 1840	Lime	3679 - 3689	Chert
1840 - 1970	Lime	3689 - 3699	Chert
1970 - 1995	Broken Lime	3699 - 3717	Chat and shale
1995 - 2095	Lime, shale, broken	3717 - 3729	Lime
2095 - 2183	Shale and lime	3729 - 3744	Lime
2183 - 2322	Lime and shale	3744 - 3752	Shale
2322 - 2417	Broken Lime	3752 - 3755	Lime and Simpson shale
2417 - 2515	Lime and shale	3755 - 3757	Lime
2515 - 2568	Shale and lime	3757 - 3760	Lime
2568 - 2643	Lime and shale	3760 - 3763	Lime
2643 - 2740	Broken Lime	3763 - 3773	Shale, Lime and chert
2740 - 2775	Lime	3773 - 3777	Shale, Lime and Chert
2775 - 2828	Lime and shale broken	3777 - 3781	Shale and chert
2828 - 2873	Lime	3781 - 3785	Lime paritese and shale
2873 - 2935	Lime	3785 - 3800	Shale and chat
2935 - 2995	Lime	3800 - 3808 1/2	Shale and chat
2995 - 3058	Lime	3808 1/2	T. D.
3058 - 3118	Lime		
3118 - 3187	Broken Lime		
3187 - 3270	Shale and shells		

(SEE OVER FOR CORING RECORD)

PLUGGING
FILE 21 23R104
BOOK PAGE 11 LINE 28

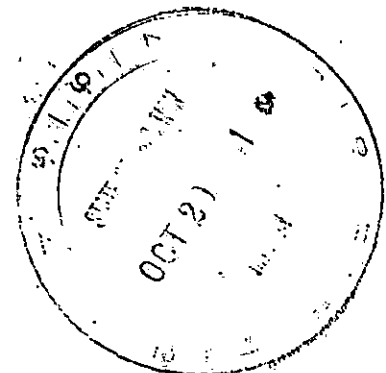

CORING RECORD: (Rotary and Cable Tools)