

15-155-02239-0000


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 Broadway
Wichita, Kansas

Reno County. Sec. 21 Twp. 23 Rge. 10 (E) W. (W)

Location as "NE/CNW/SW" or footage from lines SW NW SE
Lease Owner Cities Service Oil Company
Lease Name Kreie "B" Well No. 2
Office Address Box 144, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed November 28, 1941
Application for plugging filed April 1, 1957
Application for plugging approved April 2, 1957
Plugging commenced April 30, 1957
Plugging completed May 8, 1957
Reason for abandonment of well or producing formation Depleted formation.

NORTH

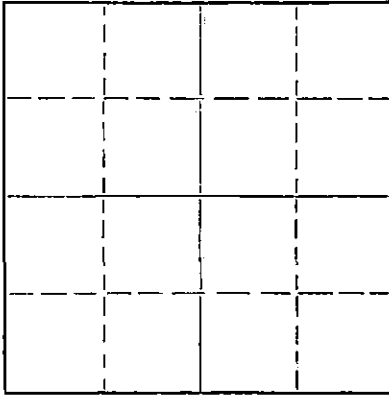

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production April 3, 1957
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fuel Durkee
Producing formation Viola Depth to top 3770 Bottom 3778 Total Depth of Well 3778 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8" | 307' | None |
| | | | | 5-1/2" | 3770' | 1617' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3778-3760', river sand.
3760-3712', 6 sacks cement.
3712- 250', heavy mud.
250- 190', rock bridge and 15 sacks cement.
190- 20', heavy mud.
20' to base of cellar, rock bridge and 5 sacks cement.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor C. E. Shull Casing Pulling Co.
Address Box 558, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
V. M. Conover (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. M. Conover
Box 144, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of May, 19 57

My commission expires March 12, 1959.

Notary Public.

PLUGGING
FILE SEC. 21 T. 23 R. 10
BOOK PAGE 3 LINE 32

RECEIVED
STATE CORPORATION COMMISSION
MAY 10 1957
5-10-57
CONSERVATION DIVISION
Wichita, Kansas

15-155-02234-0000

Comp. Cities Service Oil Co. Well No. 2 Farm Krolo "B"
 Location 990' south & 330' east of Centor Sec. 21 T. 23 R. 10W
 Elevation 1788 County Reno State Kansas
 Drlg. Comm. November 8, 1941 Contractor Hiscox Drilling Company
 Drlg. Comp. November 28, 1941 Acid 500 gals. 12-1-41
 T. D. 3778' Initial Prod. B. H. P. Gauge Potential: 3000 oil, no water, 24 hrs.
(Ind. Cap. 6,487 bbls.)

CASING RECORD:

8-5/8" @ 307' cem. 200 sx Red Star
 5-1/2" @ 3770' cem. 75 sx Lone Star

FORMATION RECORD:

| | |
|---------------------|------|
| cellar | 0-8 |
| sand | 129 |
| red bed | 225 |
| shale & shells | 1025 |
| salt | 1318 |
| salt & shale | 1420 |
| shale & shells | 1455 |
| lime shells & shalt | 1623 |
| shale & lime brokon | 1781 |
| sandy lime | 1811 |
| hard lime | 1826 |
| broken lime | 2181 |
| lime & shale | 2372 |
| broken lime & shale | 2498 |
| shale | 2570 |
| lime | 2592 |
| lime & shale | 2755 |
| broken lime & shale | 2809 |
| lime | 3134 |
| lime & shale | 3209 |
| lime | 3233 |
| shale | 3335 |
| lime | 3594 |
| shale | 3628 |
| chert | 3646 |
| shale & lime | 3677 |
| shale & lime shells | 3723 |
| shale | 3774 |
| lime | 3775 |

3775 Rot. TD = 3772 SIM
 lime 3778 T. D.

Corr. Top Viola 3770'
 Penetration 8'
 Total Depth 3778'

Loaded hole with 2275' water before drilling in.

Hole filled 2275' to 3025' in 1 hr.

Syfo: 500' 0°
 1000' 0°
 1500' 0°
 2000' 0°
 2500' 1°
 2900' 0°
 3500' 0°

RECEIVED
 STATE CORPORATE COMMISSION

APR 2 - 1957

CONSERVATION DIVISION
 Wichita, Kansas

PLUGGING
 FILE SEC 21 T23 R 10W
 BOOK PAGE 3 LINE 32