

15-155-02283-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

FORMATION PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Strike out upper line
when reporting plug-
ging of formations.

Reno County. Sec. 31 Twp. 23S Rge. (E) 10 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW NE NE

Lease Owner The Texas Company

Lease Name F. McNickle Well No. 2

Office Address 614 Bitting Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 11-15-1944

Application for plugging filed 8-2-1949

Application for plugging approved 8-2-1949


Plugging commenced 8-16-1949

Plugging completed 8-17-1949

Reason for abandonment of well or producing formation Well ceased to be a commercial producer.

If a producing well is abandoned, date of last production April, 1949

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

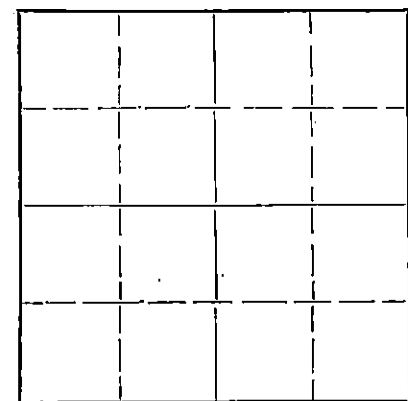

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation Viola Depth to top 3670' Bottom Total Depth of Well 3750 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10-3/4"	233'	0
				7"	3749'	94 joints

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED AND ABANDONED:

Plugged with heavy mud from 3750' to 230'.
Plugged with 15 sacks cement from 230' to 190'.
Plugged with heavy mud from 190' to 15'.
Plugged with 5 sacks cement from 15' to bottom of cellar.
Plugged with surface clay from bottom of cellar to ground level.

RECEIVED

Conservation Div.

AUG 18 1949

8-18-49

STATE CORPORATION
COMMISSION

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Texas Company
Address 614 Bitting Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

M. C. Harrell (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) M. C. Harrell

614 Bitting Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 17th day of August, 1949

H. Howard Kistler Notary Public.

My commission expires September 20, 1952

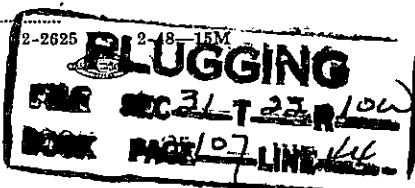

LOG OF WELL

Form PO-214 Sheet 1 (3-47)20M

15-155-02283-0000

SHEET _____

OWNER The Texas Company DIVISION Oklahoma-Kansas DATE MADE December 15, 1944
 DISTRICT Kansas LEASE F. McNickle WELL NO. 2
 STATE Kansas COUNTY OR PARISH Reno TWP. 23S RANGE 10W SEC. 31
 LOCATION OF WELL SW NE NE

COMMENCED RIGGING UP 10/9/44 COMMENCED DRILLING 10/10/44 COMPLETED DRILLING 11/15/44
 DAY DRILLER _____ NIGHT DRILLER _____ CONTRACTOR Hissom Drlg Co.
 CABLE FROM _____ TO _____ ROTARY FROM 0 TO 3750 COMPANY RIG No. _____
 TOTAL DEPTH 3750' MEASURED BY _____ ELEVATION 1803

CASING RECORD

SIZE	WEIGHT	PUT IN WELL		PULLED OUT		LOST IN WELL		SHOES		PACKERS		
		FEET	INS.	FEET	INS.	FEET	INS.	LENGTH	MAKE	KIND	LENGTH	SET AT
10-3/4"	29# SW	233				W/ 250	sax cement					FT.
7" OD		3749				W/ 100	sax cement					FT.
												FT.
												FT.
												FT.
												FT.
												FT.
												FT.

WAS CASING CEMENTED? _____ IF SO, HOW MANY SACKS OF CEMENT USED? _____
 LINER: STATE SIZE AND WEIGHT _____ WHERE SET _____ FT. AND INS. BLANK _____ FT. AND INS. PERFORATED _____
 HOW PUT TOGETHER _____ COUPLING _____ FLUSH-JOINT _____ INSERTED _____
 REMARKS: _____

EQUIPMENT RECORD

TUBING				SUCKER RODS			PUMPING OUTFIT
SIZE	WEIGHT	FEET	INS.	FEET	INS.	SIZE AND KIND	DESCRIPTION, KIND, SIZE, ETC.

FLOWING, PUMPING, GASSER OR DRY Flow PRODUCTION FIRST 24 HOURS 1407 bbls PRODUCTION SETTLED _____
 IF GAS WELL, OPEN FLOW CAPACITY _____ SHUT IN PRESSURE _____ ROCK PRESSURE _____
 KIND OF SHOT _____ SIZE OF SHOT, QUARTS _____
 NUMBER OF SHELLS _____ SIZE OF SHELLS _____ INCHES, DIAMETER _____
 LENGTH OF SHELLS _____ FEET _____ INCHES _____ TOP OF SHOT _____
 BOTTOM OF SHOT _____ ANCHOR _____ WELL BRIDGED TO _____
 TOTAL DEPTH OF WELL _____ NUMBER OF SHOT _____ PRODUCTION BEFORE SHOT _____ BBLs. PER DAY _____
 PRODUCTION AFTER SHOT _____ BBLs. PER DAY. SHOT FURNISHED BY _____
 NAME OF SHOOTER _____ SHOT INSPECTED _____ BY _____ (COMPANY EMPLOYEE) _____
 COMMENCED DRILLING DEEPER _____ COMPLETED _____ DRILLING DEEPER _____
 TOTAL DEPTH _____ PRODUCTION FIRST 24 HOURS _____ PRODUCTION SETTLED _____

RECEIVED
 Conservation Div.
 AUG 18 1949
 STATE CORPORATION
 COMMISSIONER
 KANSAS

REMARKS: Perf 3704-11 w/ 19 shots, flow 55 bbl in 1-1/2 hrs then died. --
Acidized w/ 500 gals, flow 265 bbls in 5 hrs open, flow 214 bbls in 6 hrs
thru 1/2" choke - Bottom hole bomb test, 1407 bbls/ 24 hrs.
Tops: Lansing 3297', Cong 3595', Misener 3664', Viola 3670'

NOTE: IF WELL WAS DRY, STATE UNDER REMARKS, WHEN, HOW, AND BY WHOM PLUGGED.

STATE UNDER REMARKS ANYTHING OF INTEREST NOT COVERED IN LOG.
 IF THE SPACE PROVIDED FOR REMARKS IS NOT SUFFICIENT, FILE

PLUGGING

FILE SEC 31 T 33 R 10W NUMBER OF SHEETS _____
 BOOK PAGE 107 LINE 44

LOG OF WELL

SHEET No. _____

District Kansas

Owner The Texas Co.

Farm F. McNickle

Well No. 2

FORMATION	AMOUNT	COLOR	HARD OR SOFT	DEPTH CORES TAKEN	REMARKS
Shale & Sand	160				
Red Bed	233				
Red Bed & Shale	490				
Shale & Shells	1000				
Shale & Salt	1120				
Shale & Shells	1390				
Sandy Lime	1470				
Lime & Shale	1780				
Lime & Sand	1825				
Lime & Shale	2120				
Lime	2155				
Lime & Shale	2802				
Lime	3145				
Lime & Shale	3230				
Lime	3680				
Shale & Chert	3700				
Lime	3750	T.D.			