


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Hodgeman County. Sec. 15 Twp. 22S Rge. 25W (E) (W)
Location as "NE/CNW%SW%" or footage from lines 651' FEE & 658' FSL of SE/4
Lease Owner Kewanee Oil Company
Lease Name Larkin Well No. 7
Office Address Box 360, Hoisington, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 8, 19 61
Application for plugging filed February 8, 19 61
Application for plugging approved February 8, 19 61
Plugging commenced February 9, 19 61
Plugging completed February 9, 19 61
Reason for abandonment of well or producing formation Dry Hole

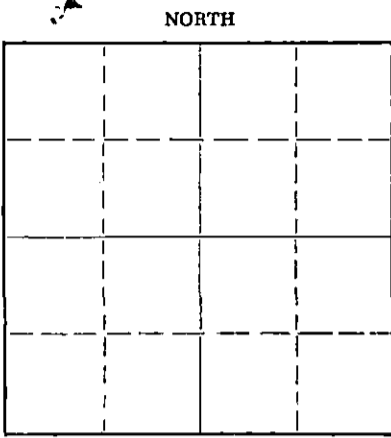

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes - Verbal from Mr. Broadfoot.

Name of Conservation Agent who supervised plugging of this well Mr. Frank Broadfoot, 222 S. Main, St. John, Kan.
Producing formation Mississippi Depth to top 4604 Bottom 4686 Total Depth of Well 4686 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FRDM	TO	SIZE	PUT IN	PULLED OUT
Heebner	Dry	3900		8-5/8"	97'	None
Toronto	"	3918				
Lansing	"	3950				
Cherokee	"	4486				
Conglomerate	"	4578				
Mississippi	"	4604				
Spergen-Warsaw	"	4660				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud from 4686' to 85'.
Set plug at 85' with 1/4 sack of hulls and 20 sacks cement.
Filled hole with mud to 35' and set plug w/ 1/4 sack hulls.
Cemented to cellar. Plugged and Abandoned at 5:30 A.M. February 9, 1961.

RECEIVED
STATE CORPORATION COMMISSION

FEB 15 1961

CONSERVATION DIVISION
Wichita, Kansas

2-15-61

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Garvey Drilling Company
Address 352 North Broadway, Wichita, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Peter Blanda (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Peter Blanda
P. O. Box 360, Hoisington, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of February, 19 61

My commission expires September 21, 1961 Samuel H. Juller Notary Public.



Kewanee Oil Company

West Kansas District

Hallet Waterflood - Hallet Pool

Well Record & Sandology: Larkin No. 7.

Location: 651' FSL and 658' FSL of SE/4 Section 15,
T-22-S, R-25-W, Hodgeman County, Kansas.

Elevation: 2514' Cement Marker (C.M. 3.00' above
top of 8-5/8" casing collar).

Drilling Commenced: January 23, 1961.

Drilling Completed: February 8, 1961.

Completion Date: February 9, 1961.

Total Depth: 4686' C.M. FRTD: P & A.

Perforation Record: None.

Treating Record: None.

Initial Production: None - P & A.

FORMATION TOPS

	<u>Samples</u>	<u>Log</u>	
Heebner		3900	-1386
Toronto		3918	-1404
Lansing		3950	-1436
Cherokee	4486	-1972	4486 -1972
Penn. Basal Congl.	4578	-2064	4578 -2064
Mississippi	4605	-2091	4604 -2090
Spargen-Warsaw		4660	-2116
Total Depth	4686	-2172	4686 -2172

Casing Record

Ran 93.90' of 8-5/8" casing and set at 96.90' C.M.
Cemented with 125 sacks pomax with 2% calcium
chloride and 1/4" flocclo per sack of cement.
Cement circulated to surface.

Formation Record

0 - 30	Top soil and clay.
30 - 100	Sand, clay and shale.
100 - 1040	Shale, sand and red bed.
1040 - 1680	Shale and sand.
1680 - 1720	Lime.
1720 - 2360	Shale, sand w/lime streaks.
2360 - 2545	Shale and lime.
2545 - 2730	Lime.
2730 - 2835	Shale and lime.
2835 - 2935	Lime.
2935 - 3659	Shale and lime.
3659 - 3846	Lime & chalk.
3846 - 4090	Chalky lime & shale.
4090 - 4347	Lime.
4347 - 4390	Lime and shale.
4390 - 4440	Lime.
4440 - 4473	Lime and shale.
4473 - 4482	Sand and sandy shale.
4482 - 4560	Lime and shale.
4560 - 4617	Conglomerate
4617 - 4686	Lime. - Total Depth.

RECEIVED
STATE CORPORATION COMMISSION

FEB 13 1961

CONSERVATION DIVISION
Wichita, Kansas