15-155-19269-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

Reno County. Sec. 32 Twp. 23S Rge. 10W (E) (W)

NORTH

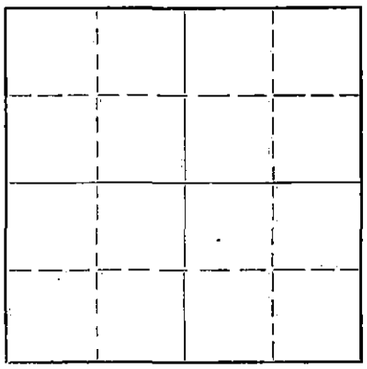

Locate well correctly on above Section Plat

Location as "NE/CNW¼SW¼" or footage from lines SW SW NE
Lease Owner The Texas Company
Lease Name F. C. Hornbaker Well No. 4
Office Address 614 Bitting Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed February 10 19 44
Application for plugging filed April 10 19 53
Application for plugging approved April 13 19 53
Plugging commenced April 20 19 53
Plugging completed April 21 19 53
Reason for abandonment of well or producing formation
Ceased to be a commercial producer
If a producing well is abandoned, date of last production May 19 51
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes
Name of Conservation Agent who supervised plugging of this well Mr. Ruel Durkee
Producing formation Arbuckle Depth to top 3752 Bottom 3851 Total Depth of Well 3851 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	208'	0'
				5-1/2"	3677'	3205'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PLUGGED AS FOLLOWS:

3851' to 3665' - Heavy Mud & Sand
3665' to 3630' - 6 Sacks Cement
3630' to 210' - Heavy Mud
210' to 170' - 20 Sacks Cement
170' to 15' - Heavy Mud
15' to bottom of cellar - 5 Sacks Cement

4-23-53

RECEIVED
STATE CORPORATION COMMISSION
APR 23 1953
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor R & S Pipe Pulling Company
Address Box 192, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
M. C. Harrell (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M C Harrell
614 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of April, 1953

H Howard Kistler
Notary Public.

My commission expires September 20, 1956

24-2675-S 2-52—20M

PLUGGING
FILE SEC 32 T 23 R 10 W
BOOK PAGE 92 LINE 9

LOG OF WELL

Form PO-214 Sheet 1 (12-50)20M

15-155-19269-0000

SHEET 1

OWNER The Texas Company DIVISION Oklahoma DATE MADE 3/21/44

DISTRICT Kansas LEASE E. C. Hornbaker WELL NO. 4

STATE Kansas COUNTY OR PARISH Reno TWP. 23S RANGE 10W SEC. 32

LOCATION OF WELL 330' from the South Line & 330' from the West Line in W-1/2 NE-1/4

COMMENCED RIGGING UP 1/2/44 COMMENCED DRILLING 1/5/44 COMPLETED DRILLING 2/10/44

DAY DRILLER NIGHT DRILLER CONTRACTOR Parker Drlg. Co.

Drilled cement only with cable tools

CABLE FROM TO ROTARY FROM 0 TO 3696 COMPANY RIG No.

TOTAL DEPTH 3696 MEASURED BY M. C. Harrell ELEVATION 1788

CASING RECORD

SIZE	WEIGHT	PUT IN WELL		PULLED OUT		LOST IN WELL		SHOES		PACKERS		
		FEET	INS.	FEET	INS.	FEET	INS.	LENGTH	MAKE	KIND	LENGTH	SET AT
10-3/4"	3-Ga.S.W.	208										FT.
5-1/2"OD	14# SS	3677										FT.
												FT.
												FT.
												FT.
												FT.
												FT.
												FT.

10-3/4" set w/150 sacks - 5-1/2" set w/100 sacks cement

WAS CASING CEMENTED? IF SO, HOW MANY SACKS OF CEMENT USED?

LINER: STATE SIZE AND WEIGHT WHERE SET FT. AND INS. BLANK FT. AND INS. PERFORATED

HOW PUT TOGETHER COUPLING FLUSH-JOINT INSERTED

REMARKS:

EQUIPMENT RECORD

TUBING				SUCKER RODS			PUMPING OUTFIT
SIZE	WEIGHT	FEET	INS.	FEET	INS.	SIZE AND KIND	DESCRIPTION, KIND, SIZE, ETC.

FLOWING, PUMPING, GASSER OR DRY Flowing PRODUCTION FIRST 24 HOURS 1679bbls. oil & no water. PRODUCTION SETTLED

IF GAS WELL, OPEN FLOW CAPACITY SHUT IN PRESSURE ROCK PRESSURE

KIND OF SHOT SIZE OF SHOT, QUARTS

NUMBER OF SHELLS SIZE OF SHELLS INCHES, DIAMETER

LENGTH OF SHELLS FEET INCHES TOP OF SHOT

BOTTOM OF SHOT ANCHOR WELL BRIDGED TO

TOTAL DEPTH OF WELL NUMBER OF SHOT PRODUCTION BEFORE SHOT BBLS. PER DAY

PRODUCTION AFTER SHOT BBLS. PER DAY. SHOT FURNISHED BY

NAME OF SHOOTER SHOT INSPECTED BY (COMPANY EMPLOYEE)

COMMENCED DRILLING DEEPER 5-1-51 COMPLETED 5-6-51 DRILLING DEEPER

TOTAL DEPTH 3851' PRODUCTION FIRST 24 HOURS Dry-shutin PRODUCTION SETTLED

REMARKS:

RECEIVED
STATE CORPORATION COMMISSION
APR 23 1953
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 32 T 23 R 10W
BOOK PAGE 92 LINE 9

NOTE: IF WELL WAS DRY, STATE UNDER REMARKS, WHEN, HOW, AND BY WHOM PLUGGED.
STATE UNDER REMARKS ANYTHING OF INTEREST NOT COVERED IN LOG.
IF THE SPACE PROVIDED FOR REMARKS IS NOT SUFFICIENT WRITE ON BOTTOM OF LAST SHEET OF LOG.

TOTAL NUMBER OF SHEETS

Form PO-214 Sheet 2 (1-52) 50M

LOG OF WELL

SHEET NO. 2

District Kansas Owner The Texas Company Farm F. C. Hornbaker Well No. 4

FORMATION		AMOUNT	COLOR	HARD OR SOFT	DEPTH CORES TAKEN	REMARKS
Cellar	10	10				
Sand	185	175				
Red Bed	400	215				
Shale & Shells	775	375				
Anhydrite	849	74				
Shale & Shells	1225	376				
Salt	1325	100				
Shale & Shells	1350	15				
Shale	1595	255				
Shale & Lime	1687	92				
Limee & Lime	1771	84				
Lime & Shale	1953	182				
Lime	2042	89				
Broken lime	2100	58				
Lime	2165	65				
Broken Lime	2195	30				
Lime & Shale	2261	66				
Lime	2343	82				
Shale & Lime	2363	20				
Lime	2373	10				
Lime & Shale	2610	237				
Lime	2625	15				
Lime & Shale	2675	50				Top Congl. 3622'
Shale	2725	50				
Broken Lime	2805	80				Top Kinderhook 3636'
Lime & Shale	2852	47				
Lime	3004	152				Top Viola 3673'
Broken Lime	3062	58				
Lime	3096	34				
Lime & Shale	3344	248				
Lime	3390	46				
Cherty Lime	3426	36				
Lime & Shale	3630	204				
Lime	3646	16				
Lime & Shale	3696	50				
Total Depth	3696					