


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Building
Wichita, Kansas

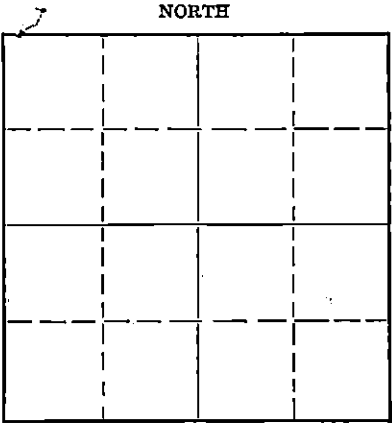

Locate well correctly on above Section Plat

Reno County, Sec. 32 Twp. 23 Rge. 10 (E) W. (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines 330' N. & 330' E. of W/4 Cor.
Lease Owner Cities Service Oil Company
Lease Name Masemore Well No. 3
Office Address Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed April 11, 19 44
Application for plugging filed March 2, 19 53
Application for plugging approved March 3, 19 53
Plugging commenced March 27, 19 53
Plugging completed April 4, 19 53
Reason for abandonment of well or producing formation Depleted formation - water injection well.
If a producing well is abandoned, date of last production February 11, 19 51
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Viola Depth to top 3682 Bottom 3817 Total Depth of Well 3817 Feet
Show depth and thickness of all water, oil and gas formations. P. B. T. D. 3755'

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	240'	None
				5-1/2"	3815'	1238'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

3755-3710' sand
3710-3670' 6 sacks cement
3670- 200' mud
200- 145' rock bridge and 15 sacks cement
145- 20' mud
20' to base of cellar, 5 sacks cement.

4-9-53

RECEIVED
STATE CORPORATION COMMISSION
APR 9 - 1953
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor B. & W. Casing Pulling Company
Address Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
V. M. Conover (employee of owner) or ~~owner or operator~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. M. Conover
Box 751, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of April, 19 53
W. B. Smith
Notary Public.

My commission expires March 12, 1955.

23-8390-3 6-51-20M
PLUGGING
FILE SEC 32 T 23 R 10W
BOOK PAGE 82 LINE 5

15-155-62288-0000

Company Cities Service Oil Co. Well No. 3 Farm Wagoner
 Location 330' North and 330' East of W/4 Corner Sec. 32 T. 23 R. 10W
 Elevation 1798 County Wagoner State Kansas
 B. H. P. Gauge Potential: 2822' oil, 118' water,
 Initial Prod. 24 hrs. (Ind. Cap. 7610 bbls. fluid/day) Contractor Holt Drilling Company
 Acid 250 gals. 5-10-44 Drig. Comm. March 22, 1944
 T. D. 3817' - P. B. to 3755 S. L. M. Drig. Comp. April 11, 1944

CASING RECORD:

8-5/8" @ 240' con. 150 ex cement;
 resea. top of 8-5/8"
 with 95 ex cement.
 5-1/2" @ 3815' con. 125 ex bulk con.

FORMATION RECORD:

sand & shale	0-165
shale & sand	190
shale & shells	1455
shale, shells & lime	1595
lime & shale	2060
lime broken	2165
lime & shale	2235
shale & shells	2470
lime	2490
shale	2540
lime	2625
shale & shells	2815
lime broken	2955
lime	3170
lime broken	3200
lime	3360
lime broken	3415
lime	3680
sand	3685
lime & chert	3700
lime	3722
lime & chert	3735
lime	3753
lime & chert	3776
lime & shale	3819
lime	3820

3820 Tot. TD = 3817 SLM

Corr. Top Viola 3682'
 Corr. Top Arbuckle 3814'
 Penetration 3'
 Total Depth 3817'
 P. B. Total Depth 3755'

Arb. fillups: 300' water in 40 mins.
 450' water in 1 hour
 1400' water in 8 hrs.
 2500' water in 12 hrs.

Set Lano-Wells plug at 3775.
 Dumped 2 1/2 sacks cement on Lano-
 Wells plug. Top cement 3755 SLM.

Loaded hole with 2700' water.
 Perforated 39 shots 3718-24.

SYFO: 500' 00
 1000' 00
 1500' 00
 2500' 00
 3000' 00
 3500' 00

PLUGGING
 FILE SEC 32T 23R 10W
 BOOK PAGE 82 LINE 5

DATE CORRECTED
 MAR - 3 1953
 CONSERVATION DIVISION
 Wichita, Kansas