


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

15.053.30005.00.00  
WELL PLUGGING RECORD  
OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

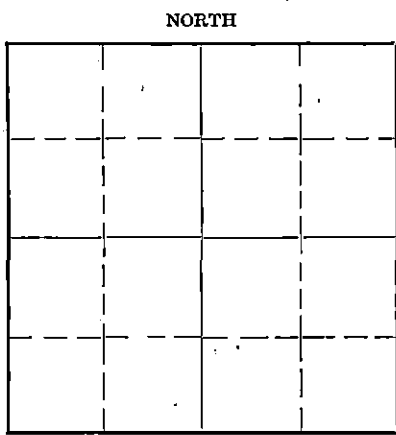

Location as Wichita County. Sec. 30 Twp. 18 Rge. 10 E (E) (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines 68 NE  
Lease Owner Russell Moore  
Lease Name 1210 Well No. 1  
Office Address Wichita, Kansas  
Character of Well (Completed as Oil, Gas or Dry Hole) dry  
Date, well completed June 8th 1940  
Application for plugging filed June 11th 1940  
Application for plugging approved June 14th 1940  
Plugging Commenced June 14th 1940  
Plugging Completed June 14th 1940  
Reason for abandonment of well or producing formation dry  
If a producing well is abandoned, date of last production \_\_\_\_\_ 193  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?  
Yes

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well Neal Durkin, Lyons, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3498 Feet.  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				2 1/2"	208'	208'
				3 1/2"	248'	248'
				10"	2043'	2043'
				8 1/2"	3100'	3100'
				7" CD	3386'	3386'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Hole mudded from 3408 ft to 3391 ft, cemented from 3381 ft to 3360 ft, mudded from 3360 ft to 235 feet. At 235 feet a bridge was placed and extended to 248 feet (20 ft cement- 15 sacks), was placed and hole filled to bottom of cellar with mud, and a cap of 10 sacks of cement at bottom of cellar.

PLUGGING  
FILE SEC 30.116-70.4  
BOOK PAGE 106 LINE 9

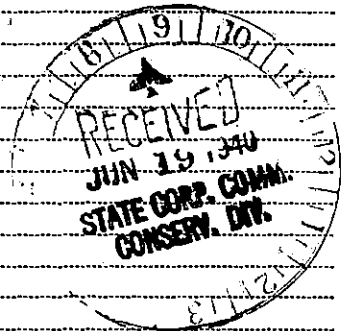

6-19-40

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Russell Moore,  
Address Wichita, Kansas.

STATE OF KANSAS, COUNTY OF SEDGWICK, SS.  
Joe Conroy (employee or independent operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Joe Conroy  
Holyrod, KS  
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of June, 19 40

My commission expires

April 23rd 1941

Notary Public.

Fanchon Cassidy

800 Bitting Building  
Wichita, Kansas 15.053.30005.00.00  
July 20, 1940

Well No.	1
Lease	Lille
Description	SE NE 30-16-10W
County	Ellsworth County
File	106-9

I. W. Murfin,  
Union Nat'l. Bank Bldg.,  
Wichita, Kansas.

Dear Sir:

The Rules and Regulations of the  
KANSAS STATE CORPORATION COMMISSION  
relative to well plugging, require the  
item or items listed below to be filed  
with this office.

Please furnish us with the \_\_\_\_\_

\_\_\_\_\_ WELL LOG \_\_\_\_\_

for the above subject well.


STATE CORPORATION COMMISSION

T. A. MORGAN, DIRECTOR  
CONSERVATION DIVISION

HMH:ha

BY:

*E. M. Hager*  
E. M. Hager

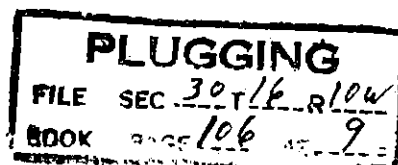

$$\begin{array}{r}
 40 \\
 43 \\
 \hline
 83 \\
 64 \\
 \hline
 24
 \end{array}$$

$$\begin{array}{r}
 17257.93 \\
 .027 \\
 \hline
 12080.551 \\
 34515.86 \\
 \hline
 465.96411
 \end{array}$$

6  
5  
4  
5

$$\begin{array}{r}
 17257.93 \\
 003 \\
 \hline
 5177379 \\
 46596411 \\
 \hline
 517.73790
 \end{array}$$

2

$$\begin{array}{r}
 17257.93 \\
 03 \\
 \hline
 517.7379
 \end{array}$$

2

15.053.30005.00.00

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY.  
412 Union National Bank Bldg, Wichita, Kansas.

RUSSELL MOOR ET AL.  
Lillie No. 1.


SEC 30 T. 16 R. 10W.  
CSL SE NE

Total Depth. 3406  
Comm. 4-21-40 Comp. 6-8-40  
Shot or Treated.  
Contractor. I.W. Murfin.  
Issued. 6-15-40

County Ellsworth.

CASING.

15 1/2" 206'  
12 1/2" 430' UR 646'  
10" 1930' UR 2043'  
8 1/4" 2970'  
7" 3335'




Elevation.

Production. DRY.

Figures Indicate Bottom of Formations.

cellar	10	lime	1745	shale blk	2455
clay	45	shale	1750	lime	2485
sand	50	red rock	1753	shale	2490
shale	125	lime	1810	lime	2505
red rock	135	shale	1815	shale lime sholls	2520
shale	165	lime	1825	shale	2545
sand	180	shale	1830	lime	2550
shale	185	red rock	1840	shale	2560
red rock	225	lime	1850	lime	2565
shale	240	shale	1855	brokon lime	2605
red rock	280	lime	1860	lime	2615
shale	300	shale	1865	shale lime sholls	2640
sand	310	lime	1880	lime	2710
shale	420	red rock	1890	shale	2715
sand	430	lime	1900	lime	2780
shale	470	shale	1905	shale	2785
red rock	545	lime	1920	lime	2905
shale	550	shale	1925	shale	2915
red rock	641	1930 equals 1944 Corr. Meas.	lime shells shale	2925	
anhydrite	645	lime	1970	lime	2945
lime	667	red rock	1978	shale	3012
red rock	870	lime	2010	lime Kans. City	3088
shale	930	shale	2015	shale	3097
red rock	975	lime	2020	lime	3220
shale	1080	shale	2035	lime shale broak	3260
salt	1335	sdy lime	2040	lime	3265
salt & shale	1345	shale	2047	shale lime	3280
salt & shells	1360	lime	2050	lime	3309
lime	1373	shale	2055	shale	3314
shale	1380	lime	2090	lime	3327
lime	1400	shale	2105	conglomerate	3371
shale	1405	lime	2122	3380 equals 3373'4" Corr. Meas.	
lime	1420	shale	2132	Arbuckle lime	3406
shale	1427	lime	2150		
lime	1432	shale	2160	Total Depth.	
shale	1435	lime	2170		
lime	1445	shale	2205	OIL SHOW.	
shale	1460	lime	2210	light sh oil 3040	
lime	1470	shale	2227	light sh oil 3225-30	
shale	1475	lime	2230	sh oil 3371-77	
shale brown	1485	shale	2240		
lime	1525	lime shells shale	2275	WATER RECORD.	
shale	1535	shale	2295	12 BW 45-50	
lime	1575	red rock	2300	2 BW 165-80	
shale	1580	shale	2355	HFW 420-30	
lime	1585	lime	2380	1/2 BW 1615-25	
red rock	1595	shale	2390	2 BW 1705-20	
lime	1615	brkn lime	2400	2 BW 2715-25	
sdv lime	1630	shale	2420	3 BW 2945	
sdv shale	1640	lime	2435	2 BW 3140-50	
lime	1735	shale	2440	2 BW 3225-30	
shale	1740	lime	2450	wtr 3400-06	



PLUGGING  
FILE SEC 30 T 16 R 10W  
BOOK PAGE 106 LINE 9

A F F I D A V I T


COUNTY OF GARFIELD

CO.

CITY OF SALT LAKE

Personally appeared before me, the undersigned authority for administering oaths, one T. C. Murfin, who deposes and says:  
The foregoing is a true and correct copy of the log of the roll  
sprung by me in the center of the south line of the Southeast  
Quarter of the Northwest Quarter of Section 20, Township 18, Range  
20 East, Millworth County, Kansas.

Further affiant a 1th set.

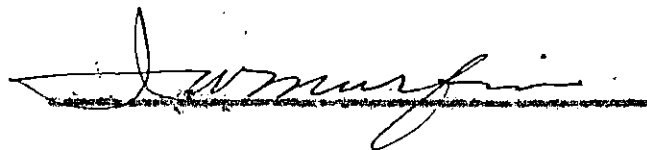

Subscribed and sworn to before me this 18th day of June, 1940.



F. A. Cassidy  
Notary Public

My commission expires April 23rd, 1941.