

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Blitting Building  
Wichita, Kansas

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

NORTH

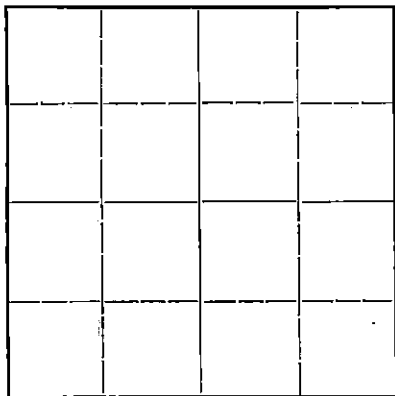

Locate well correctly on above  
Section Plat

Reno County, Sec. 18 Twp. 22 Rge. (E) 9 (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NE 1/4 NE 1/4  
Lease Owner Helmerich & Payne, Inc.  
Lease Name Wisbey Well No. 1  
Office Address 415 Philtower Building, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry  
Date well completed 7-6-1942  
Application for plugging filed 7-6-1942  
Application for plugging approved 7-6-1942  
Plugging commenced 7-6-1942  
Plugging completed 7-6-1942  
Reason for abandonment of well or producing formation  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander  
Producing formation None Depth to top Bottom Total Depth of Well 3725 Feet  
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
No record				10"	236'0"	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pulled drill pipe 500' from the bottom and circulated and filled with heavy mud. Then circulated every 500' up to 236' from the surface and placed a permanent plug and cemented with 15 sacks of cement to 206' then filled with heavy mud to 26' from the surface and cemented with 10 sacks of cement to 6' from the surface then mudded to the surface.

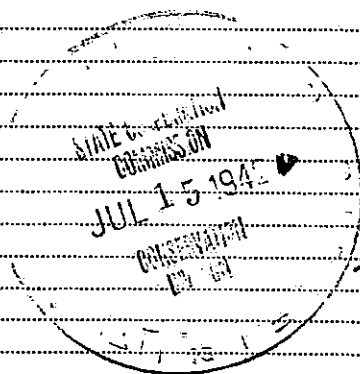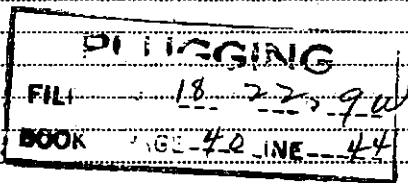

7-15-42

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Helmerich & Payne, Inc.  
Address 415 Philtower Building, Tulsa, Oklahoma.

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.  
I, C. M. Copeland, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. M. Copeland  
415 Philtower Bldg., Tulsa, Oklahoma.  
(Address)

SUBSCRIBED AND SWORN to before me this 14th day of July 1942  
Lucy Strippin  
Notary Public.

My commission expires July 22nd, 1943

Wisby #1  
NE/4 NE/4 NE/4 Section 18-22S-9W  
Reno County, Kansas  
Helmerich & Payne, Inc.


Commenced: June 16, 1942  
 Completed: July 5, 1942

Surface soil	0	60	Shale and lime	3095	3140
Sand and red rock	60	319	Lime	3140	3160
Shale and shells	319	1005	Lime, hard	3160	3193
Sand	1005	1045	Lime, soft	3193	3196
Salt and shale	1045	1140	Lime, hard	3196	3277
Shale	1140	1220	Lime, soft	3277	3284
Anhydrite	1220	1260	Lime, hard	3284	3286
Lime and shale	1260	1335	Lime	3286	3311
Broken lime	1335	1420	Lime, hard	3311	3313
Shale	1420	1440	Lime, soft	3313	3317
Shells	1440	1463	Lime, hard	3317	3324
Lime	1463	1490	Lime, soft	3324	3330
Lime and shale	1490	1645	Lime, hard	3330	3354
Broken lime	1645	1720	Lime	3354	3422
Lime	1720	1745	lime and shale	3422	3440
Broken lime	1745	1825	Shale and chert	3440	3448
Shale and lime	1825	1990	Shale and lime	3448	3463
Shale	1990	2010	Shale	3463	3490
Lime and shale, sandy	2010	2060	Shale and lime	3490	3531
Shale and lime	2060	2282	Lime	3531	3562
Lime	2282	2309	Lime and chert	3562	3568
Shale	2309	2340	Lime	3568	3578
Shale and lime	2340	2498	Cherty lime - Viola	3578	3593
Lime	2498	2550	Lime	3593	3614
Shale and lime	2550	2615	Sand ?	3614	3619
Lime	2615	2640	Shale	3619	3642
Lime and streaks of shale	2640	2675	Shale	3642	3683
Lime	2675	2714	Lime, cherty	3683	3696
Lime, hard	2714	2750	Lime	3696	3725
Lime, soft	2750	2760			
Lime, hard	2760	2770	TOTAL DEPTH	3725	
Lime, medium	2770	2795			
Lime, hard	2795	2840			
Medium lime	2840	2860			
Lime	2860	2910			
Lime and streaks of shale	2910	2926			
Lime	2926	2985			
Shale	2985	3095			

CASING RECORD

10-3/4" Surface Casing set at 275' and cemented with 225 sacks of cement.

STATE OF OKLAHOMA )  
 ) ss  
 COUNTY OF TULSA )

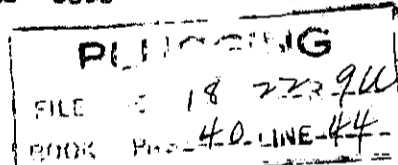

I hereby affirm that the above and foregoing is a true and correct copy of the log of our Wisby Well #1, located in the NE/4 NE/4 NE/4 of Section 18, Township 22 South, Range 9 West, Reno County, Kansas.

HELMERICH & PAYNE, INC.,

By William Good  
 Treasurer

Subscribed and sworn to before me, a Notary Public, this 8th day of July, 1942.

Wm. M. Switzer  
 Notary Public

My commission expires  
 May 20, 1945.