

15-185-01612-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

Stafford County. Sec. 1 Twp. 23S Rge. (E) 12 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines G. NE $\frac{1}{4}$, NE $\frac{1}{4}$

Lease Owner Stanolind Oil and Gas Company

Lease Name George Figger Well No. 1

Office Address Box 591, Tulsa 2, Oklahoma

R Character of Well (completed as Oil, Gas or Dry Hole) Oil

g Date well completed April 13 19 32

e Application for plugging filed July 12 19 46

12 Application for plugging approved July 16 19 46

W Plugging commenced July 28 19 46

Plugging completed August 5 19 46

Reason for abandonment of well or producing formation Production Exhausted

If a producing well is abandoned, date of last production (all Water) Jan. 19 46

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. H. W. Kerr

Producing formation Arbuckle Depth to top 3579 Bottom 3616 Total Depth of Well 3616 Feet

Show depth and thickness of all water, oil and gas formations. Plugged B. 3337

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle		3579	3616	16"	203	None
				8-5/8"	3573	1620

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Chat from 3337' to 3319', Plugged from 3319' to 3295' with 7 sacks cement,
Mud from 3295' to 200', bridged with rock and ran 20 sacks cement from
200' to 180', mud from 180' to 10' and capped to cellar base with 10 Sacks
Cement.

[Handwritten signature]

[Handwritten box with numbers: 1 23 12W, 62 22]

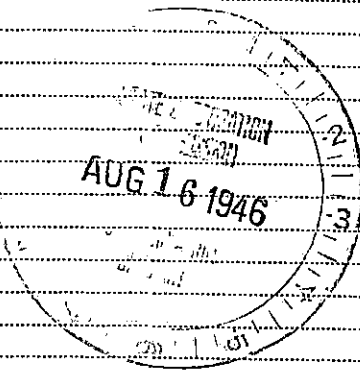

8-16-46

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Mr. C. B. Snyder
Address Box 518, Zenith, Kansas

STATE OF Kansas, COUNTY OF Stafford, ss.
Mr. C. B. Snyder (Field Supt.) (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *[Signature]*

Zenith, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 15 day of August 19 46

My commission expires Dec 20, 1947 Notary Public.

STANOLIND OIL AND GAS COMPANY

WELL RECORD

TWP. 23 8
N OR S

SUPPLEMENTAL
(ENTER "X" WHEN APPLICABLE)

LEASE George Figger WELL NO. 1

LOCATION OF WELL: 660 FT. NORTH SOUTH OF THE NORTH SOUTH LINE AND 660 FT.

EAST WEST OF THE EAST WEST LINE OF THE NE NE

OF SECTION 1 TOWNSHIP 23 NORTH SOUTH, RANGE 12 EAST WEST.

R
G
E

12

W
E OR W

Stafford Kansas
COUNTY STATE

ELEVATION: Derrick Floor 1820

COMPLETED AS: OIL WELL GAS WELL WATER WELL DRY HOLE

DRILLING: COMMENCED 2-26- 1932 COMPLETED 4-11 1932

LOCATE WELL CORRECTLY

Midwest refining Company

ADDRESS Denver, Colorado

OPERATING COMPANY

OIL OR GAS SANDS OR ZONES

NAME	FROM	TO	NAME	FROM	TO
<u>Siliceous Lime</u>	<u>3.579</u>	<u>3616</u>			

OPEN

WATER SANDS

NAME	FROM	TO	WATER LEVEL	NAME	FROM	TO	WATER LEVEL

CASING RECORD (OVERALL MEASUREMENT)

LINER SCREEN RECORD

CSG. SIZE	WEIGHT	DESCRIPTION		QUANTITY FEET	SIZE	QUANTITY FEET	SET AT		MAKE AND TYPE
		THREADS	MAKE - GRADE				TOP	BOTTOM	
<u>16</u>	<u>70</u>	<u>8</u>	<u>LW</u>	<u>203</u>					
<u>8-5/8</u>	<u>36</u>	<u>10</u>		<u>3538</u>					

PACKER RECORD

SIZE	LENGTH	SET AT	MAKE AND TYPE

CEMENTING RECORD

MUDDING RECORD

SIZE	WHERE SET FEET	CEMENT			METHOD	FINAL PRESS	(CABLE TOOLS)	
		SACKS	BRAND	TYPE			METHOD	RESULTS
<u>16</u>	<u>203</u>	<u>135</u>			<u>Halliburton</u>			
<u>8-5/8</u>	<u>3538</u>	<u>150</u>			<u>Do</u>			

1 23 (20)
6 2 22

WHAT METHOD WAS USED TO PROTECT SANDS WHEN OUTER STRINGS WERE PULLED?

WERE BOTTOM HOLE PLUGS USED?

IF SO, STATE KIND, DEPTH SET, AND RESULTS OBTAINED.

ROTARY TOOLS WERE USED FROM 0 FEET TO 3540 FEET, AND FROM _____ FEET TO _____ FEET

CABLE TOOLS WERE USED FROM 3540 FEET TO 3616 FEET, AND FROM _____ FEET TO _____ FEET

24-HOUR PRODUCTION OR POTENTIAL TEST 200 Bbls. Oil 1% Water

WATER _____ BBLs.

IF GAS WELL, CUBIC FEET PER 24 HOURS _____ SHUT-IN PRESSURE _____ LBS. PER SQUARE IN.

I, THE UNDERSIGNED, BEING FIRST DULY SWORN UPON OATH, STATE THAT THE WELL RECORD IS TRUE AND CORRECT ACCORDING TO THE RECORDS OF THIS OFFICE AND TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Signed - Ray E. Gustafson

SUBSCRIBED AND SWORN TO BEFORE ME THIS _____ DAY OF _____ 1932

MY COMMISSION EXPIRES _____

NOTARY PUBLIC

JUL 13 1932

FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Surface Sand	0	50			
Sand	50	100			
Shale	100	140			
Sand and red rock	140	203			
Red Rock	203	235			
Red Rock and shells	235	550			
Anhydrite	550	570			
Red rock and shale	570	624			
Red shale	624	780			
Shale and lime shells	780	1010			
Shale and salt	1010	1400			
Blue shale	1400	1454			
Blue shale & lime shells	1454	1650			
Lime and shale	1650	1755			
Shale and shells	1755	1793			
Broken Lime	1793	1917			
Lime	1917	1981			
Lime & Streaks of shale	1981	2044			
Broken lime	2044	2119			
Black shale and lime	2119	2185			
Lime	2185	2215			
Black and green shale	2215	2250			
Lime and shale	2250	2355			
Lime	2355	2390			
Shale and lime shells	2390	2464			
Shale and hard streaks of lime	2464	2516			
Sandy Shale	2516	2566			
Lime	2566	2625			
Shale and lime shells	2625	2760			
Gas Sand	2760	2763			
Sandy lime & shale	2763	2862			
Lime	2862	2923			
Shale and shells	2923	2967			
Sandy lime	2967	2976			
Lime	2976	3005			
Lime & shale streaks	3005	3112			
Red Rock	3112	3150			
Blue shale and shells	3150	3242			
Blue shale and lime	3242	3280			
Broken lime	3280	3370			
Lime	3370	3485			
Lime and shale streaks	3485	3530			
Red & green shale, lime	3530	3538			
Lime	3538	3540			
Lime	3540	3543			
Varigated Conglomerate	3543	3582			
Lime soft	3582	3592			
Lime	3592	3616			