


WELL PLUGGING RECORD

Get All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

NORTH

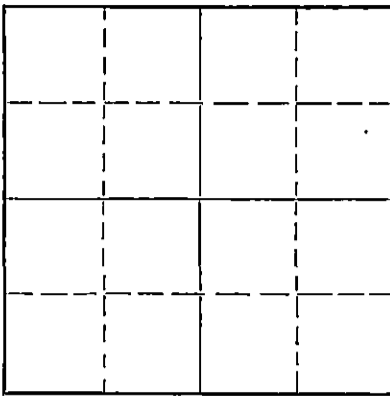

Locate well correctly on above
Section Plat

Stafford County, Sec. 11 Twp. 22S Rge. 12W (EX) (W)
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines 330 fr N line & 990 fr E
Lease Owner Burke-Greis Oil Corp'n. E Line of SE $\frac{1}{4}$
Lease Name Fred Voigt Well No. 1
Office Address Box 268, Tulsa, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed June 5, 1950 19
Application for plugging filed October 25, 1950 19
Application for plugging approved October 26, 1950 19
Plugging commenced November 2, 1950 19
Plugging completed November 6, 1950 19
Reason for abandonment of well or producing formation dry
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation Kansas City Lime Depth to top 3315 Bottom 3440 Total Depth of Well 3677 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
					8-5/8"	
				5-1/2"	624	Cemented
					3640	2912

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole back to 3470' with chat.
Dumped 5 sacks of cement at 3470 with dump bailer.
Shot off and pulled 2912' of 5-1/2" pipe.
Mudded hole to 250'.
Set 10' rock bridge at 250'.
Dumped 15 sacks of cement at 240'. Mudded to 30'.
Set 10' Rock Bridge at 30'.
Dumped 10 sacks of cement in top 20 ft. of hole.

(Well log on reverse side hereof)

RECEIVED
STATE CORPORATION COMMISSION
NOV 17 1950
CONSERVATION DIVISION
WICHITA, KANSAS
11-17-50

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Burke-Greis Oil Corporation
Address Box 268, Tulsa, Okla.

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
W.F. Luther, Secy. of Burke-Greis Oil Corp. (Employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *W.F. Luther*
Box 268, Tulsa, Okla. (Address)

SUBSCRIBED AND SWORN TO before me this 16th day of November, 1950.

My commission expires Feby. 28, 1953 Notary Public.

PLUGGING
FILE SEC. 11 T 22R 12
BOOK PAGE 37 LINE 30

Log of Fred Voigt well #1.

Total depth 3677 ft.

Commenced May 17, 1950

Completed June 5, 1950

Contractor - Noble Drilling Co., Tulsa, Okla.

8-5/8" casing - 624 ft.

5-1/2" " - 3640 ft.

Dry hole.

<u>Formation</u>	<u>Top</u>	<u>Bottom</u>	
Sand & red beds	0	424	
Red beds	424	623	
Anhydrite	623	635	
Red beds & shale	635	1602	
Lime	1602	2018	
Lime & Shale	2018	2291	
Shale & broken lime	2291	2464	
Shale	2464	2776	
Shale & Lime	2776	2989	
Lime	2989	3184	
Shale & Lime	3184	3315	
Lime	3315	3558	
Chert	3558	3600	
Shale	3600	3643	
Lime	3643	3654	
Sandy lime	3654	3656	
Sandy lime & shale	3656	3658	
Lime	3658	3661	
Lime & blue shale	3661	3665	
Lime	3665	3671	
Lime & Shale	3671	3676	
Lime	3676	3677	Total depth


KANSAS WELL LOG BUREAU --- KANSAS GEOLOGICAL SOCIETY
412 UNION NATIONAL BANK BUILDING - WICHITA, KANSAS

COMPANY Burke-Greis Oil Corporation
Box 268, Tulsa, Okla.
FARM Fred Voigt NO. 1

SEC. 11 T. 22S R. 12W
LOC. 330' from N line & 990'
from E line of SE $\frac{1}{4}$

TOTAL DEPTH 3677
COMM. 5-17-50 COMP. 6-5-50
SHOT OR TREATED
CONTRACTOR Noble Drilling Co., Tulsa, Okla.
ISSUED

COUNTY Stafford Co., Kansas.



CASING
20 10 8-5/8" - 624 ft.
15 1/2 8 1/2 5 1/2" - 3640 ft.
12 1/2 6 3/4
13 3/4 5 1/2

ELEVATION

PRODUCTION Dry hole

FIGURES INDICATE BOTTOM OF FORMATIONS

Formation	Top	Bottom	
Sand & red beds	0	424	
Red beds	424	623	
Anhydrite	623	635	
Red beds & shale	635	1602	
Lime	1602	2018	
Lime & Shale	2018	2291	
Shale & broken lime	2291	2464	
Shale	2464	2776	
Shale & lime	2776	2989	
Lime	2989	3184	
Shale & lime	3184	3315	
Lime	3315	3558	
Chert	3558	3600	
Shale	3600	3643	
Lime	3643	3654	
Sandy lime	3654	3656	
Sandy lime & shale	3656	3658	
Lime	3658	3661	
Lime & blue shale	3661	3665	
Lime	3665	3671	
Lime & Shale	3671	3676	
Lime	3676	3677	Total depth

RECEIVED
Conservation Div.
JUL 28 1950
STATE CORPORATION
COMMISSION
KANSAS