


WELL PLUGGING RECORD

Give All Information Completely
Make Esquire Report
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

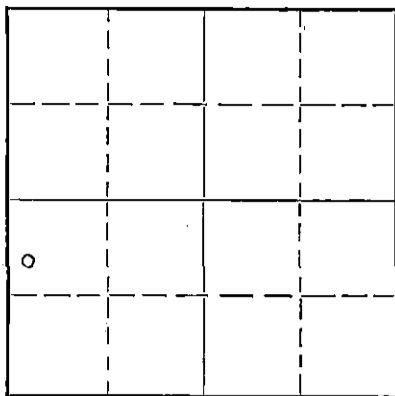

Locate well correctly on above
Section Plat

Stafford County, Sec. 2 Twp 22 Rge. 12W (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW/2 NW SW
Lease Owner Loyd Farthing
Lease Name Krug Well No. 1
Office Address Shawnee, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Abandoned Oil Well
Date well completed _____ 19____
Application for plugging filed February 3, 1950 (verbal) 19____
Application for plugging approved February 18, 1950 19____
Plugging commenced February 3, 1950 19____
Plugging completed February 16, 1950 19____
Reason for abandonment of well or producing formation oil exhausted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3598 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	175'	
				5 1/2"	3590'	1731'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

175' of 8-5/8 Surface pipe circulated with cement.
5 1/2 inch casing set at 3590 feet cemented with 100 sacks of cement. Filled hole back from bottom to 3585 feet with chat. Dumped 5 sacks of cement at 3585 feet. Shot off and pulled the 5 1/2 inch casing. Filled with mud to 175 feet. Set rock bridge and 15 sacks of cement at 175 feet. Mud to 30 feet. Plug and 10 sacks of cement at the surface.

6-14-50

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Loyd Farthing
Address Shawnee, Oklahoma

STATE OF KANSAS, COUNTY OF BARTON, ss.


(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Mack Duncan
463 W. Brady - Herington, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 9th day of June, 1950.

Eda Duward
Notary Public.

My commission expires Nov. 24, 1953.

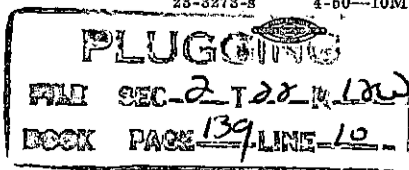

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY.
412 Union National Bank Bldg, Wichita, Kansas.

FRED STECKEL-HELMERICH & PAYNE, INC.
Krug No. 1.

SEC. 2 T. 22 R. 12W.
CWL NW SW

Total Depth. 3598
Comm. 8-9-40 Comp. 9-3-40
Shot or Treated.
Contractor.
Issued. 10-19-40

County Stafford.



CASING.

8 5/8" surface 186' cemented.
5 3/16" 3590' cemented.

Elevation.

Production. Pot. 2933 B.

Figures Indicate Bottom of Formations.

surface clay	50
sand and gravel	94
red rock and shells	175
shale and shells	230
sand	320
red bed and shells	525
shale and shells	901
shale and anhydrite	990
shale	1040
salt and shale	1273
sand shale and shells	1320
shale and shells	1490
anhydrite and shale	1614
shale and shells	1655
shale and lime	1682
lime	1705
sdv lime and shale	1945
shale and lime	2145
broken lime	2400
shale and lime	2984
lime	3092
lime hard	3154
shale and shells	3243
shale and lime	3260
lime	3516
lime and chert	3555
Simpson shale	3588
Simpson sand	3590
sand	3592
lime	3598
Total Depth.	

RECEIVED

JUN 20 1950

ST. ...
...
...
101.063

PLUGGING
WELL SEC 2 T 22 R 12W
BOOK PAGE 139 LINE 10