

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
311 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 3 Twp. 22S Rge. 12 (E) (W)

Location as "NE/CNW&SW" or footage from lines 2070' FSL & 2235' FWL NENE-SW

Lease Owner Pan American Petroleum Corporation

Lease Name Max Sittner "D" Well No. 5

Office Address Oklahoma City, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 2-3 19 65

Application for plugging filed Verbal 2-3 19 65

Application for plugging approved Verbal 2-3 19 65

Plugging commenced 2-3 19 65


Plugging completed 2-3 19 65

Reason for abandonment of well or producing formation No Production

Encountered

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

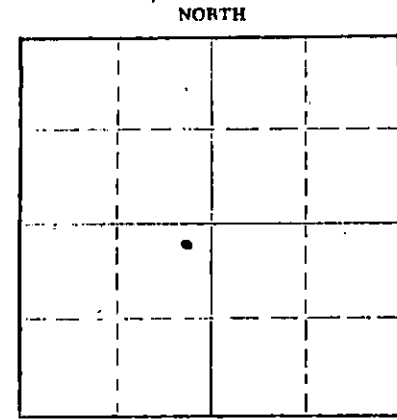

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well A. Elving

Producing formation None Depth to top Bottom Total Depth of Well 3747 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	Dry	3647	3747	8-5/8	721	None
Lansing	Dry	3303	3553			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy drilling mud 3747' to 250' set plug capped with 25 sx cement,  
heavy mud to 40' set plug capped with 10 sx cement to bottom of collar.

RECEIVED  
STATE CORPORATION COMMISSION

FEB 19 1965

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Murfin Drilling Company  
Address Wichita, Kansas

STATE OF Kansas, COUNTY OF Seward, ss.

I, D. M. Liles (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

P. O. Box 432, Liberal, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 16th day of February, 19 65

[Signature]  
R. W. Banks Notary Public.

My commission expires: 2-11-68

PAN AMERICAN PETROLEUM CORPORATION

WELL RECORD

SUPPLEMENTAL (ENTER "X" WHEN APPLICABLE)

Grid for well location with '3' in the center.

LOCATE WELL CORRECTLY

LEASE Max Sittner "D" WELL NO. 5
LOCATION OF WELL: 2070 FT. NORTH SOUTH OF THE 2235 FT.
EAST WEST OF THE WEST LINE OF THE SW
OF SECTION 3 TOWNSHIP 22 SOUTH RANGE 12 EAST WEST.
Stafford Kansas
COUNTY STATE

ELEVATION: Ground 1858 RDB 1863
COMPLETED AS: OIL WELL GAS WELL WATER WELL DRY HOLE
DRILLING COMMENCED 1-25 1965 COMPLETED 2-3 1965

OPERATING COMPANY Pan American Petroleum Corporation ADDRESS Oklahoma City, Oklahoma

OIL OR GAS SANDS OR ZONES

Table with columns: NAME, FROM, TO, NAME, FROM, TO. Rows include Arbuckle (3647-3747) and Lansing (3303-3553).

WATER SANDS

Table with columns: NAME, FROM, TO, WATER LEVEL, NAME, FROM, TO, WATER LEVEL. Row 1: Not Known.

CASING RECORD (OVERALL MEASUREMENT)

LINER-SCREEN RECORD

Tables for casing and liner-screen records with columns for size, weight, threads, make, grade, quantity, size, and set at.

PACKER RECORD

Table for packer record with columns for size, length, set at, and make and type.

CEMENTING RECORD

MUDDING RECORD

Tables for cementing and mudding records with columns for size, where set, cement, method, final press, and results.

RECEIVED STATE CORPORATION COMMISSION FEB 19 1965

WHAT METHOD WAS USED TO PROTECT SANDS WHEN OUTER STRINGS WERE PULLED? CONSERVATION DIVISION Wichita, Kansas

IF SO, STATE KIND, DEPTH SET, AND RESULTS OBTAINED

ROTARY TOOLS WERE USED FROM 0 FEET TO 3747 FEET, AND FROM FEET TO FEET

CABLE TOOLS WERE USED FROM None FEET TO FEET, AND FROM FEET TO FEET

24-HOUR PRODUCTION OR POTENTIAL TEST Dry hole plugged and abandoned


WATER BBLS.

IF GAS WELL, CUBIC FEET PER 24 HOURS SHUT-IN PRESSURE LBS. PER SQUARE IN.

I, THE UNDERSIGNED, BEING FIRST DULY SWORN UPON OATH, STATE THAT THIS WELL RECORD IS TRUE AND CORRECT ACCORDING TO THE RECORDS OF THIS OFFICE AND TO THE BEST OF MY KNOWLEDGE AND BELIEF.

SUBSCRIBED AND SWORN TO BEFORE ME THIS 16 DAY OF February 1965 Area Supt.

MY COMMISSION EXPIRES 2-11-68 NOTARY PUBLIC R. W. Banks



FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Sand, Gravel	0	260			
Red Bed, Shale	260	649			
Anhydrite	649	671			
Shale, shells	671	1378			
Shale, Lime	1378	3390			
Lime	3390	3480			
Lime, Shale, Chert	3480	3643			
Lime, Shale	3643	3651			
Lime	3651	3747			
Total Depth		3747			