


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

WELL PLUGGING RECORD

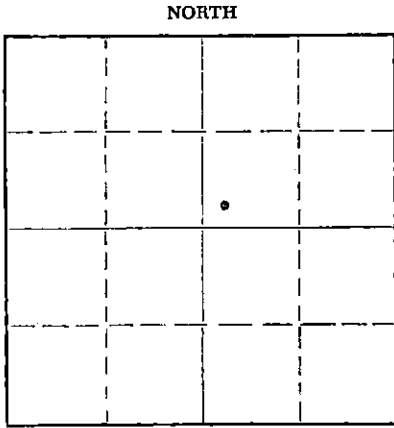

Locate well correctly on above Section Plat

Pawnee County, Sec. 25 Twp. 21S Rge. 21E (E) 16 (W)  
Location as "NE/CNW/SW" or footage from lines SW-SW-NE  
Lease Owner Amerada Petroleum Corporation  
Lease Name Yuarda Akerman Well No. 1  
Office Address Box 197, Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 8-25- 19 55  
Application for plugging filed 7-2- 19 59  
Application for plugging approved 7-6- 19 59  
Plugging commenced 2 p.m. 7-21- 19 59  
Plugging completed 4 p.m. 7-21 19 59  
Reason for abandonment of well or producing formation Recompleted as Gas Well  
11-18-58, Volume of Saltwater increased making well too expensive to operate.  
If a producing well is abandoned, date of last production 4-28- 19 59  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot, St. John, Kansas  
Producing formation Arbuckle Depth to top 3848 Bottom \_\_\_\_\_ Total Depth of Well 3906 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE   | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
|           |         |      |    | 8-5/8" | 963'   | None       |
|           |         |      |    | 5-1/2" | 3902'  | 2729'      |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set Baker 5 1/2" C.I. Bridge Plug @ 3750' Dumped 4 Sacks Cement On Bridge Plug from 3750' to 3718'  
Halliburton Spotted Cement Plugs As Follows:  
425' to 625' W/65 Sacks Cement.  
Filled Hole W/Heavy Mud to Top  
0' to 32' W/10 Sacks Cement

7-24-59

RECEIVED  
CONSERVATION COMMISSION  
JUL 24 1959  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Bert Self Casing Pulling Co.  
Address R.R. #4, Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Ernest Higgins (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ernest Higgins

SUBSCRIBED AND SWORN TO before me this 22nd day of July 19 59

(Address) Charles W. Huber

My commission expires November 21, 1961

Notary Public.

PLUGGING  
FILE SEC. 25 T. 21S R. 16W  
BOOK PAGE 49 LINE 3

DRILLER'S LOG:

| <u>From</u> | <u>To</u> |                         |
|-------------|-----------|-------------------------|
| 0'          | 230'      | Sand & gravel           |
| 230'        | 310'      | Clay, Shale 7 shells    |
| 310'        | 395'      | Shale                   |
| 395'        | 490'      | Sand                    |
| 490'        | 925'      | Red Bed & Shale         |
| 925'        | 958'      | Red Bed                 |
| 958'        | 964'      | Anhydrite               |
| 964'        | 1015'     | Anhydrite & Lime        |
| 1015'       | 1060'     | Red Bed                 |
| 1060'       | 1690'     | Red bed, shale 7 shells |
| 1690'       | 1890'     | Shale & shells          |
| 1890'       | 2294'     | Lime & Shale            |
| 2294'       | 2425'     | Lime                    |
| 2425'       | 2720'     | Shale & Lime Streaks    |
| 2720'       | 2890'     | Shale & broken lime     |
| 2890'       | 2970'     | Lime & shale            |
| 2970'       | 3080'     | Lime                    |
| 3080'       | 3200'     | Lime & shale            |
| 3200'       | 3455'     | Lime                    |
| 3455'       | 3490'     | Shale & lime            |
| 3490'       | 3610'     | Lime                    |
| 3610'       | 3690'     | Lime & shale breaks     |
| 3690'       | 3750'     | Lime                    |
| 3750'       | 3788'     | Lime & chert            |
| 3788'       | 3814'     | Lime                    |
| 3814'       | 3853'     | Shale & sand            |
| 3853'       | 3903'     | Lime                    |
|             | 3903'     | Total depth             |

**RECEIVED**  
STATE CORPORATION COMMISSION

JUL 6 1959

CONSERVATION DIVISION  
Wichita, Kansas

|                                     |
|-------------------------------------|
| <b>PLUGGING</b>                     |
| FILE SEC <u>25</u> T. <u>21R/64</u> |
| BOOK PAGE <u>49</u> LINE <u>3</u>   |