


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD  
OR 15-009-15746-0000  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

NORTH

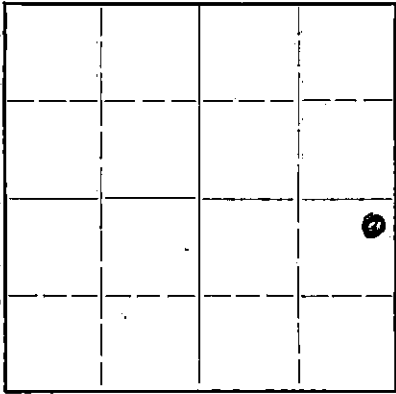

Locate well correctly on above  
Section Plat

Barton County, Sec. 12 Twp. 16 Rge. 12 (E) (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NEC-58 $\frac{1}{2}$   
Lease Owner E. G. Bradley  
Lease Name Anna Holder Well No. 1  
Office Address Route 3 - Wichita  
Character of Well (completed as Oil, Gas or Dry Hole) dry hole  
Date well completed 3-31-43 19  
Application for plugging filed 3-31-43 19  
Application for plugging approved 3-31-43 19  
Plugging commenced 3-31-43 19  
Plugging completed 3-31-43 19  
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production \_\_\_\_\_ 19  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well Alexander  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3397 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
	<u>Cemented to top</u>			<u>8 7/8</u>	<u>277</u>	<u>None</u>
<u>Well drilled with Rotary</u>						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

filled hole with heavy mud from 3397' to 277' and Bridge at 277' and cement to 232' and mud and bridge to 26' and cement to 6'

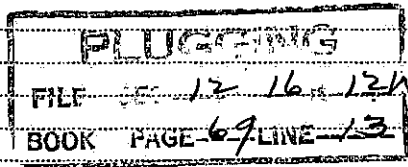

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to E. G. Bradley  
Address Route 3 - Wichita

STATE OF Kansas, COUNTY OF Sedgewick, STATE OF KS.  
Frank Hannum (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Frank Hannum 04-06-43  
809 Petroleum Bldg - Wichita (Address)

SUBSCRIBED AND SWORN to before me this 2nd day of April, 1943  
Clytell Smalley Notary Public.

My commission expires Dec 6, 1945



COMPANY: E. G. Bradley, and Marilyn Oil Co.  
CONTRACTOR: George H. Hannum, Inc.  
WELL: Anna Holder No. 1

LOCATION: NE & SE/4 Section 12-10-12  
Barton County, Kansas

COMMENCED: 3/10/43  
COMPLETED: 3/31/43

CASING RECORD:  
8 5/8" 277 - 140 sacks

ELEVATION:  
PRODUCTION:

FORMATION	DEPTH
Shale & shells	186
Sand	202
Red rock & shells	277
Shale & shells	466
Sand	480
Iron & shale	515
Red rock	734
Anhydrite	770
Shale & shells	1210
Salt	1460
Shale & shells	1735
Lime & shale breaks	2080
Lime, hard	2125
Shale & shells	2651
Lime	2684
Shale & shells	2686
Lime	2884
Lime & shale breaks	3060
K.C. Lime	3327
Conglomerate	3306
Lime, Arbuckle	3397
TOTAL DEPTH	3597


I hereby certify this to be a correct and accurate log of the above described well as shown by the drilling reports.

*George H. Hannum*

Subscribed and sworn to before me this 8th day of April, 1943

*Bessie Moore*  
Notary Public

My Commission Expires July 30, 1946

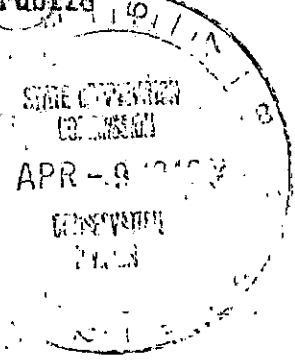

PLUGGING  
FILE NO. 12-16-R-12W  
BOOK PAGE 69-LINE 13

# Plugging Instructions

## How Well Shall Be Plugged

Date 3-31 1943

Location N.E. & S.E.

Sec. 12 Twp. 14 Rge. 12

Operators E. L. Bradley

Address Wichita, Kansas

Lease Holder Well No. 1 County Barton

Total Depth 3397 ft. P. B. to \_\_\_\_\_ ft.

The hole shall be filled with mud or cement from 3397 ft.


to 277 ft. and mud, rock and bridge to At 277 ft.

and cement to 232 ft. and mud, rock and bridge to

26 ft. and cement to \_\_\_\_\_ ft. and mud, rock

and bridge to \_\_\_\_\_ ft. and cement to \_\_\_\_\_ ft.

and mud to top of surface.

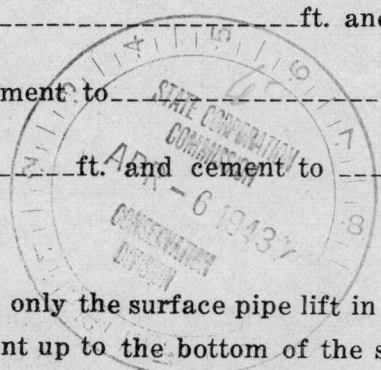

A rotary drilled dry hole that has only the surface pipe left in the hole shall be filled with heavy rotary pit mud or mud and cement up to the bottom of the surface pipe or at approximately (50) below the fresh water, where the hole shall be bridged and cemented and then filled with extra heavy mud and cement to top of surface.

The operator shall have the option as to the method of placing cement in hole by: (a) dump bailer, (b) pumped through tubing, (c) pump and plug.

Pipe in hole 8 in. 177 ft. \_\_\_\_\_ in. \_\_\_\_\_ ft. \_\_\_\_\_ in. \_\_\_\_\_ ft.  
\_\_\_\_\_ in. \_\_\_\_\_ ft. \_\_\_\_\_ in. \_\_\_\_\_ ft.

**PLUGGING**  
FILE 12 16 R 12W  
BOOK PAGE 69 LINE 13

(Signed) E. T. Alexander