


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway,
Wichita, Kansas

Rice County. Sec. 7 Twp. 21S Rge. (E) 6 (W)
Location as "NE/CNW&SW&" or footage from lines CW/2 W/2 SE
Lease Owner Carl Hipple
Lease Name Blew Well No. B-1
Office Address Hutchinson, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 4-13 19 58
Application for plugging filed 4-8 19 58
Application for plugging approved 4-10 19 58
Plugging commenced 4-12 19 58
Plugging completed 4-13 19 58
Reason for abandonment of well or producing formation _____

NORTH

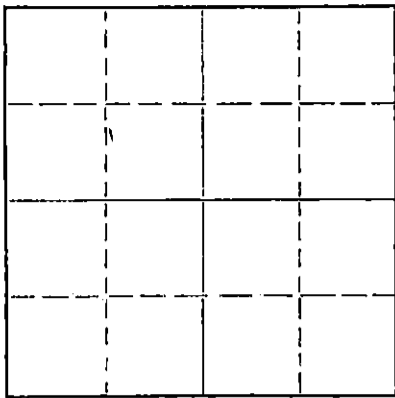

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3358 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	160'	
				5-1/2"	3353'	2976'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Plugged with sand from 3358-3345'. Dumped 5 sacks cement. Mudded hole to 160', 6' rock bridge. Dumped 15 sacks cement. Mudded surface, put 5 sacks at top. Finished mudding up surface pipe. Put 5 sacks cement at top. Put

RECEIVED
STATE CORPORATION COMMISSION

APR 25 1958

CONSERVATION DIVISION
Wichita, Kansas

4-25-58

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company
Address P. O. Box 127, Sterling, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.
F. A. Wuellner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. A. Wuellner
F. A. Wuellner
Sterling, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 24th day of April, 19 58

My Commission Expires Jan. 22, 1962

Bernard Laudmilk
Notary Public.

My commission expires _____

PLUGGING
FILE SEC 1 T. 21 R. 6
BOOK PAGE 92 LINE 32

STERLING DRILLING COMPANY
Sterling, Kansas

WELL LOG ----- BLEW B-1
Located: CW/4 W/2 SE/4, Section 1-21S-6W, Rice County, Kansas

OWNER: Carl Hipple
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company
CABLE TOOL CONTRACTOR: Sterling Drilling Company

COMMENCED: (r d) 3-11-58
(c t) 3-26-58

COMPLETED: (r d) 3-19-58
(c t) 4-13-58

RECEIVED
STATE CORPORATION COMMISSION
APR 25 1958
CONSERVATION DIVISION
Wichita, Kansas

ROTARY TOTAL DEPTH: 3354'

LOG

0 - 70 Clay & Sand
70 - 161 Red Bed & Shale
161 - 900 Shale & Shells
900 - 1210 Lime
1210 - 2200 Lime & Shale
2200 - 2665 Lime
2665 - 2830 Shale & Lime
2830 - 3215 Lime
3215 - 3335 Shale
3335 - 3354 Conglomerate & Chat T. D.

CASING RECORD

Set 8-5/8" surface casing @ 160'
with 135 sacks cement, 2% c.c.

Set 5-1/2" casing @ 3353'
with 50 sacks cement.

CABLE TOOL INFORMATION: M. I. C. T. Rigging up. Swabbed and bailed heavy mud off top of plugs. Drilling cement and approx. 2' new hole. Show of oil. Bailed dry. Some free oil coming in hole. 155' fluid in hole in 1 1/4 hr. fill up. Bailed hole dry. Rec. 138 gal. water, 23 gal. oil. Dumped 15 gal. M.C.A. on bottom. Left 1 hr. Bailed dry. Rec. 20 gal. water, 5.88 gal. oil. Dumped 15 gal. 15% M.C.A. Let stand 1 hr. Bailed dry. Rec. 28 gal. water, 8.35 gal. oil. Dumped 20 gal. M.C.A. @ 1:20 p.m. Bailed dry @ 3:00 p.m. Rec. 33.4 gal. watery acid, 8.35 gal. oil; 40 min. 5 1/2 gal. water, 3 1/2 gal. oil; 22 min. 3 1/2 gal. water, 2 1/2 gal. oil; making approx. 50% water. 910' fluid in hole, 570' water, 340' oil. Bailed hole clean on bottom, bailing off water. Sand oil treated by Halliburton. Break down on input 1650# P.S.I. used 3500# sand, 49 bbls. heavy oil, 204 bbls. lease oil, 253 bbls. total oil. Max. 1850# P.S.I. Min. 1400 P.S.I. Swabbed hole down. 250' off bottom. Rec. 108.48 bbls. total fluid. Testing 4 hrs. Total of 153.08 bbls. fluid. 1725' fluid in hole in overnight fill up, approx. 1 gal. sand. Drew off 35.6 bbls. water. Swabbed well down 120' off bottom. Made 53.4 total fluid, mostly water. Swabbed hole down and tested 6 hrs. Rec. 10.68 gal. oil, 106 gal. water. Swabbed 6 hrs. Rec. 113.94 bbls. fluid. Preparing to plug. P & A.

PLUGGING
FILE SEC. 1 T 21 R 6W
BOOK PAGE 9 LINE 32