

WELL PLUGGING RECORD

FORMATION PLUGGING RECORD


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR

Strike out upper line
when reporting plugging
off formations.

NORTH

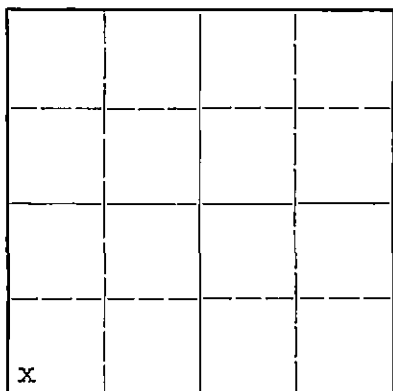

Locate well correctly on above
Section Plat

Pawnee County. Sec. 6 Twp 21S Rge 15 ~~XX~~ (W)
 Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SW/4 SW/4 SW/4
 Lease Owner Stanolind Oil and Gas Company
 Lease Name W. M. Lewis Well No. 1
 Office Address Box 1633, Oklahoma City, Oklahoma
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed October 22 19 47
 Application for plugging filed November 19 19 47
 Application for plugging approved Verbal authority October 22 19 47
 Plugging commenced October 22, 19 47
 Plugging completed October 22, 19 47
 Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well H. W. Kerr
 Producing formation None Depth to top Bottom Total Depth of Well 3820 Feet
 Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Top Anhydrite			960	8-5/8"	961	none
Top Lansing			3407			
Top Conglomerate			3695			
Top Arbuckle			3774			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with heavy mud from 3817 to 350'
 Wood plug set @ w/15 sax cement 350' to 300'
 Heavy mud 300' to 40'
 10 sax cement 40' to 5'

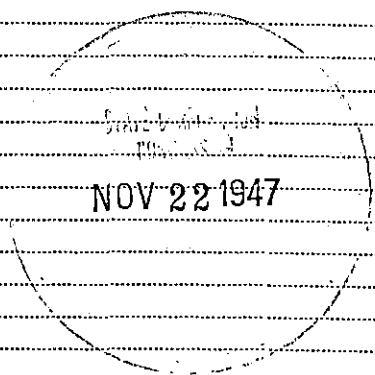

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Mr. T. L. Regan
 Address Box 1633, Stanolind Oil and Gas Company, Oklahoma City, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss.
 H. G. Nething (employee of owner) or (owner or operator) of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *H. G. Nething* Field Supt.
 Box 8, Ellinwood, Kansas
 (Address)

SUBSCRIBED AND SWORN to before me this 19th day of November, 19 47

My commission expires October 18, 1950

J. L. Cox
 Notary Public.

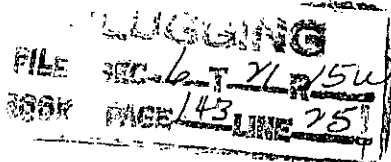

FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Surface Clay	0	40			
Gravel and Clay	40	390			
Shale and shale	390	380			
Hard	380	390			
Shale and shale	390	390			
Sandy shale and shale	390	715			
Red bed	715	937			
Anhydrite	937	995			
Shale and shale	995	1400			
Silt	1400	1440			
Shale and shale	1440	1850			
Sandy lime and shale	1850	1995			
Lime and shale	1995	2010			
Lime	2010	2140			
Shale and shale	2140	2210			
Lime broken	2210	2435			
Shale and shale	2435	2510			
Lime	2510	2790			
Lime and shale	2790	3125			
Lime	3125	3205			
Lime and shale	3205	3470			
Broken lime	3470	3535			
Lime	3535	3610			
Shale and lime	3610	3645			
Shale	3645	3740			
Broken lime	3740	3751			
Top of Simpson	3751				
Broken lime	3751	3763			
Lime and shale	3763	3774			
Top of truckle	3774				
Lime and shale	3774	3817 20			
Schlumberger Electric Log to 20					
Total Depth					
by Schlumberger		3818			
by Rotary Drill		3817			
6-5/8" 80 casing set 2		961			
6/450 wax					
Completed October 22, 1947, in a dry hole.					