


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
890 Bitting Building
Wichita, Kansas

15009-055530000

WELL PLUGGING RECORD

NORTH

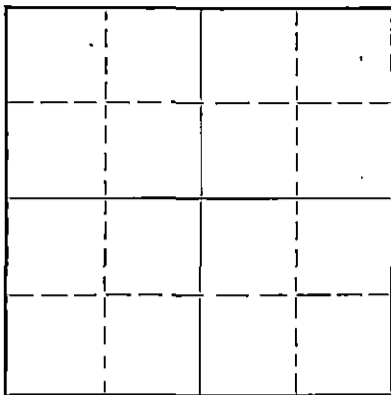

Locate well correctly on above
Section Flat

Barton County. Sec. 36 Twp. 16S Rge. 11 (E) 11 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C S $\frac{1}{2}$ SW SW
Lease Owner J. J. Lynn
Lease Name A. F. Smith Well No. 5
Office Address 1900 R.A. Long Building, Kansas City 6, Mo.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 1-15-49 19
Application for plugging filed 12-12-49 19
Application for plugging approved 12-15-49 19
Plugging commenced 12-17-49 19
Plugging completed 12-20-49 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. D. Stough
Producing formation None Depth to top _____ Bottom _____ Total Depth of Well 3396 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
		0	244	8 5/8	244	None
		0	3395	4 1/2	3395	2527

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with sand from 3427' to 3390', dumped 5 sacks cement at 3390' with dump bailer. Top of cement at 3360'. Filled with mud to 244', set rock bridge, dumped 15 sacks at 240', top of cement at 185'. Filled with mud to 30' dumped 10 sacks for cap.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to J. J. Lynn
Address 1000 R. A. Long Building, Kansas City, Missouri

STATE OF MISSOURI, COUNTY OF JACKSON, ss.
C. F. McReynolds, Manager (employee of owner) or (~~owner or operator~~) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Handwritten Signature]
(Address) _____

SUBSCRIBED AND SWORN to before me this 9th day of January, 1950.

My Commission Expires July 22, 1950

My commission expires _____

22-7377-8 4-49-10M

Notary Public.

1-10-50
PLUGGING
FILE SEC 36 T 16 R 11W
BOOK PAGE 189 LINE 26

15009-05553-0000

WELL LOG

A.F. SMITH #5

Location -CS $\frac{1}{2}$ SW SW Sec. 36-16S-11W, Barton County, Kansas

Elevation 1936'

Owner - J. J. Lynn
Contractor - Sterling Drilling Company

Commenced - 1-4-49
Completed - 1-16-49 (w/r)

Total Depth - 3396' (w/r)

Drilled w/cable tools to 3427'

LOG

0	45	Clay
45	110	Shale and shells
110	246	Shale
246	570	Shale and shells
570	590	Red bed
590	720	Red bed
720	740	Anhydrite
740-1205		Shale and shells
1205-1330		Shale and salt
1330-1570		Shale and shells
1570-1740		Lime and shale
1740-1890		Lime
1890-1990		Shale and lime
1990-2205		Lime and shale
2205-2380		Shale
2380-2690		Shale and lime
2690-2780		Lime and shale
2780-3000		Lime
3000-3081		Shale and lime
3081-3310		Lime
3310-3396		Lime and shale

CASING RECORD

244' 8-5/8" surface pipe cemented with 200 sacks cement.

3396' of 4 1/2" CASING

PRODUCTION

Dry and abandoned

TOPS

Top Anhydrite 720

Top Kansas City 3078 (-1142)

3108-12 Limestone white, soft, oolitic and chalky, fair porosity and no saturation.

3126-32 Limestone white, soft, oolitic and oolitic, fair porosity and no saturation. (No odor.)

3190-3211 Limestone gray to white, soft, chalky and oolitic, fair porosity and no saturation. (No odor.)

DEC 13 1949

PLUGGING
 FILE SEC 36 T 16 R 11 W
 PAGE 129 OF 24

KANSAS

TOPS (con't)

15 009-05553000

3273-83 Limestone gray, soft, oolitic, good porosity with spotted saturation. Fair odor. Halliburton Drill Stem Test. Packer set at 3270. T. D. R. 3286. Open 1 hour, recovered 90' oil cut mud, 800 # bottom hole pressure

Base Kansas City 3352 (-1416)

Top Conglomerate 3380 (-1444)

Top Arbuckle 3393 (-1457)

3392-96 Dolomite tan, gray to buff, medium crystalline, medium hard, trace having poor porosity and light stain, slight odor.