

15-009-16078-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

NORTH

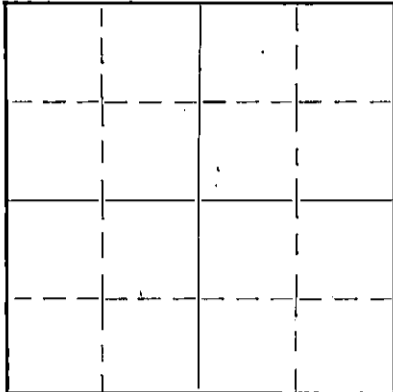

Locate well correctly on above  
Section Plat

Barton County. Sec. 2 Twp. 16 Rge. 13 (E) W. (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines S/2 NE/4  
Lease Owner Earl F. Wakefield  
Lease Name Rude Well No. 1  
Office Address 307 Union National Bank Building, Wichita  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry hole.  
Date, well completed July 5, 1939 193  
Application for plugging filed July 5, 1939 193  
Application for plugging approved 7/6/39 193  
Plugging Commenced 7/6/39 193  
Plugging Completed 7/10/39 193  
Reason for abandonment of well or producing formation  
Dry hole  
If a producing well is abandoned, date of last production 193  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well  
Producing formation Depth to top Bottom Total Depth of Well 3388 Feet.  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

| Formation | Content | From | To | Size    | Put In | Pulled Out |
|-----------|---------|------|----|---------|--------|------------|
|           |         |      |    | 12 1/2" | 425'   | 425'       |
|           |         |      |    | 10"     | 858    | all        |
|           |         |      |    | 8"      | 2162   | all        |
|           |         |      |    | 6 5/8"  | 2741   | all        |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with mud from 3388' to 3158 and with cement to 280'  
Hole bridged at 280 and 15 foot cement plug set on bridge  
Hole filled with mud to bottom of cellar and capped at top  
with cement.

PLUGGING  
FILE SEC 2 T 16 R 13 W  
BOOK PAGE 69 LINE 33



8-4-1939

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Earl F. Wakefield  
Address 307 Union National Bank Bldg, Wichita

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Earl F. Wakefield (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Earl F. Wakefield  
307 Union National Bank Bldg.  
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of July, 1939

My commission expires October 25, 1941

Notary Public.

Well # 1: 8 1/2" N.P.W. 2-18-13W, Barton County, Kansas.  
 Lease Owners: ~~xxxxxx~~ ~~xxxxxx~~ ~~xxxxxx~~ ~~xxxxxx~~ ~~xxxxxx~~ ~~xxxxxx~~ ~~xxxxxx~~ ~~xxxxxx~~  
 and Earl F. Wakefield.  
 Contractor: Earl F. Wakefield.  
 Commenced: 5/26/39  
 Completed: 7/8/39

12 1/4" 428  
 10" 358  
 8" 2162  
 6 5/8" 2541 U.R. 2741

|                  |      |                       |      |                     |      |
|------------------|------|-----------------------|------|---------------------|------|
| post rock        | 25   | lime                  | 2117 | red shale           | 3054 |
| shale dark       | 100  | shale red             | 2125 | shale blue          | 3062 |
| shale blue       | 190  | lime broken           | 2145 | shale               | 3096 |
| shale light      | 230  | lime                  | 2150 | lime                | 3100 |
| shale sandy      | 235  | correction 2150=2162  |      | shale               | 3105 |
| 6 N.W. 230-235   |      | lime                  | 2175 | lime                | 3106 |
| shale blue       | 240  | lime                  | 2200 | lime                | 3106 |
| shale red        | 255  | shale blue            | 2215 | shale blue          | 3110 |
| red rock         | 290  | lime                  | 2255 | lime                | 3152 |
| shale light      | 320  | shale                 | 2260 | shale               | 3154 |
| sand             | 430  | lime                  | 2277 | lime                | 3155 |
| shell            | 432  | shale blue            | 2283 | show oil 3154-59    |      |
| N.F.W. 330-430   |      | lime shell            | 2285 | lime                | 3173 |
| shell hard       | 434  | shale                 | 2290 | shale black         | 3176 |
| sand             | 455  | lime                  | 2298 | lime                | 3215 |
| run 12 1/2" 425' |      | blue shale            | 2315 | 1 N.W. 3159-3168    |      |
| sand             | 470  | lime                  | 2325 | lime                | 3230 |
| shale blue       | 495  | shale blue            | 2330 | shale black         | 3232 |
| shale light      | 520  | lime                  | 2350 | lime                | 3251 |
| shale red        | 560  | shale                 | 2370 | shale blue          | 3253 |
| red rock         | 755  | lime                  | 2380 | lime                | 3288 |
| red shale        | 855  | shale blue            | 2405 | shale blue          | 3300 |
| run 10" 355      |      | lime                  | 2415 | lime                | 3315 |
| anhydrite        | 880  | shale blue            | 2437 | shale blue          | 3319 |
| red shale        | 1046 | lime                  | 2430 | lime                | 3326 |
| shale red        | 1070 | shale                 | 2437 | shale               | 3329 |
| shale blue       | 1110 | lime                  | 2418 | lime                | 3340 |
| red rock         | 1170 | shale                 | 2527 | correction 3340=    | 3350 |
| shale blue       | 1185 | shell sandy           | 2530 | conglomerate        | 3370 |
| shale blue       | 1235 | shale                 | 2535 | lime                | 3375 |
| salt 1           | 1325 | corrected 2535 equals |      | dolomite            | 3388 |
| salt             | 1450 | 2541                  |      | N.F.W. 3384 to 3388 |      |
| shale blue       | 1500 | 6 5/8" run 2541       |      | Total Depth 3388.   |      |
| salt             | 1630 | shale blue            | 2555 |                     |      |
| lime & shale     | 1575 | lime white            | 2575 |                     |      |
| shale light      | 1565 | shale                 | 2582 |                     |      |
| lime 1           | 1590 | lime shell            | 2585 |                     |      |
| shale blue       | 1595 | shale * shells        | 2605 |                     |      |
| lime             | 1618 | lime                  | 2620 |                     |      |
| shale blue       | 1625 | shale                 | 2635 |                     |      |
| lime             | 1635 | lime                  | 2652 |                     |      |
| shale blue       | 1640 | shale                 | 2660 |                     |      |
| lime             | 1650 | lime shell            | 2668 |                     |      |
| lime & shale     | 1680 | shale                 | 2690 |                     |      |
| lime             | 1690 | shale                 | 2702 |                     |      |
| shale            | 1720 | lime                  | 2707 |                     |      |
| lime             | 1755 | shale                 | 2710 |                     |      |
| red rock         | 1775 | lime                  | 2729 |                     |      |
| lime             | 1805 | shale                 | 2737 |                     |      |
| shale blue       | 1910 | lime                  | 2745 |                     |      |
| lime             | 1860 | correction 2745=      | 2750 |                     |      |
| blue shale       | 1865 | shale                 | 2755 |                     |      |
| lime sandy       | 1905 | lime                  | 2760 |                     |      |
| lime             | 1925 | lime                  | 2875 |                     |      |
| lime broke       | 1935 | shale blue            | 2780 |                     |      |
| shale            | 1945 | lime                  | 2817 |                     |      |
| lime             | 1950 | shale                 | 2821 |                     |      |
| shale            | 1955 | lime                  | 2855 |                     |      |
| shale blue       | 1960 | shale                 | 2891 |                     |      |
| lime             | 1975 | lime                  | 2920 |                     |      |
| shale blue       | 1995 | shale                 | 2922 |                     |      |
| shale red        | 2000 | lime broken           | 2935 |                     |      |
| lime             | 2020 | lime                  | 3015 |                     |      |
| red rock         | 2025 | shale black           | 3020 |                     |      |
| lime             | 2040 | shale light           | 3032 |                     |      |
| red rock         | 2052 | lime                  | 3045 |                     |      |
| lime             | 2063 | shale blue            | 3050 |                     |      |
| red rock         | 2067 | shale blue            | 3055 |                     |      |
| lime             | 2090 | corrected 3055 equals | 3052 |                     |      |

**PLUGGING**  
 FILE SEC 2 T 16 R 13W  
 BOOK PAGE 68 LINE 27

RECEIVED  
 AUG 28 1939  
 STATE CORP. COMM.  
 CONSERV. DIV.