


15-009-16103-00-00

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

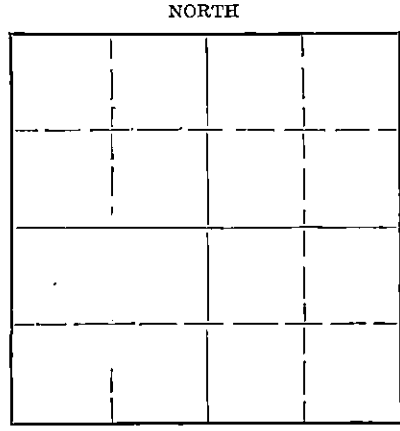

Barton County. Sec. 5 Twp. 16 Rge. (E) 13 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines 990' N. & 660' W. of Center
Lease Owner Cities Service Oil Company
Lease Name Bitter "A" Well No. 8
Office Address Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed November 29, 19 40
Application for plugging filed May 15, 19 50
Application for plugging approved May 17, 19 50
Plugging commenced June 7, 19 50
Plugging completed June 10, 19 50
Reason for abandonment of well or producing formation Depleted production.

If a producing well is abandoned, date of last production May, 19 50
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation Arbuckle Depth to top 3346 Bottom 3359 Total Depth of Well 3359 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	348'	None
				5-1/2"	3346'	2089'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Drove bridge plug from 2650' to 3200', stuck, would go no further.
3200' to 260' - 5 sacks cement and mud.
260' to 250' - wood plug and rock.
250' to 30' - 15 sacks cement
30' to base of cellar - 10 sacks cement.

RECEIVED
JUN 15 1950
6-15-1950
CORPORATION
COMMISSION
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to R. C. Cooper
Address Box 751
Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.

V. M. Conover (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. M. Conover
Box 751, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of June 19 50
W. B. Smith
Notary Public.

My commission expires March 12, 1951.

PLUGGING
FILE SEC 5 Twp 16 R 13
BOOK PAGE 6 LINE 1

WELL RECORD

Company Cities Service Oil Co. Well No. 8 Farm Bitter "A"
 Location 990' north & 660' west of Center Sec. 5 T. 16 R. 13-W
 Elevation 1906' County Barton State Kansas
 Drlg. Comm. November 6, 1940 Contractor Corbett-Harbour Drilling Company
 Drlg. Comp. November 29, 1940 Acid 500 gals. & 1000 gals. 11-27-40; 2000 gals. 11-30-40
 T. D. 3359' Initial Prod. Echo-Water Potential: 2054 oil, no water, 24 hrs.

CASING RECORD:

8-5/8" \odot 348' cem. 85 ex regular, 25 ex
 (quick set and 3 ex Aquagel)
 5-1/2" \odot 3346' cem. 100 ex cement

FORMATION RECORD:

soil and rock	0-40
shale & limo shells	348
shale & shells	470
sand hard	485
shale & shells	660
shale & red rock	755
shale & shells	825
anhydrite	903
shale & shells	1210
silt & shells	1300
shale & shells	1550
anhydrite	1575
shale & shells	1590
lime & shale	1645
lime	1674
broken lime	1857
lime	2047
broken lime	2135
lime & shale	2240
broken lime	2320
lime	2350
shale	2405
lime	2445
shale & lime	2598
shale	2690
shale & shells	2730
lime & shale	2817
lime	3052
lime & shale	3098
lime	3273
lime & shale	3320
lime (top Arbuckle 3348)	3349
3349 rotary T.D. = 3347 S.L.M.	
dolomite	3347-3359 T.D.

Corr. top Arbuckle 3346
 Penetration 13'
 Total Depth 3359

Fillup: 100' oil in 1-3/4 hrs.
 500' oil in 4-1/4 hrs.
 900' oil in 7-3/4 hrs.
 1300' oil in 9-1/4 hrs.
 1700' oil in 12-3/4 hrs.

Syfo: 2000' 1°
 2500' 0°

3349
 1000
 12-1/2

MAY 16 1950

PLUGGING
 FILE SEC 5 T 16 R 13W
 BOOK PAGE 6 LINE 1