

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Stafford County. Sec. 30 Twp 21 Rge. (E) 12 (W) 12  
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. S $\frac{1}{2}$  SW NE  
Lease Owner. The Atlantic Refining Company  
Lease Name. Fischer Well No. 1  
Office Address. Post Office Box 17, Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole  
Date well completed. 4-21-44 1944  
Application for plugging filed. 5-4-44 1944  
Application for plugging approved. 5-5-44 1944  
Plugging commenced. 5-6-44 1944  
Plugging completed. 5-10-44 1944  
Reason for abandonment of well or producing formation. Dry Hole

NORTH

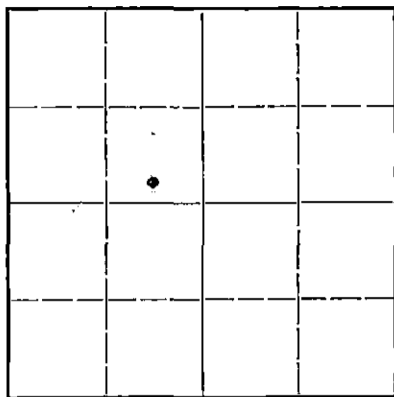

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production. 1944  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well. Eldon R. Petty  
Producing formation. None Depth to top. 0 Bottom. 0 Total Depth of Well. 3696 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand & gravel	0	0	228'	8-5/8" OD	286'	0
Top of Viola	Show dead oil	3628'	3650'	5 1/2" OD	3684'	1366'
Arbuckle	Slight show oil & Water	3650'	3650 1/2'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to .....feet for each plug set.

Original hole plugged back to 3657' with 3 sax cement and 5 sax calseal.  
Heavy drilling mud filled to 240'  
Wood bridge 240' to 238' and cemented with 7 sax to 220'  
Filled with heavy drilling mud to 25'  
Wood bridge 25' to 23' and cemented with 7 sax to base of cellar.

**PLUGGING**  
FILE 30 21 126  
BOOK PAGE 116 LINE 21

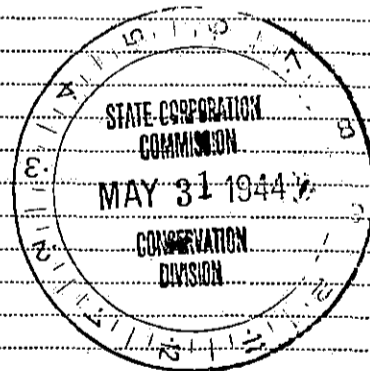

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Mr. S. K. Myers  
Address Post Office Box 17, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, SS.  
Mr. Stanton K. Myers (employee of owner) or (~~owner~~) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Stanton K Myers

(Address)

SUBSCRIBED AND SWORN to before me this 26 day of May, 1944

H. C. Colegrove  
Notary Public.

My commission expires Oct 28 1944

15.185.00839.0001  
**WELL RECORD**

THE ATLANTIC REFINING COMPANY  
 830 Kennedy Building  
 Tulsa, Oklahoma

Block or Twp. 21S-12W  
 Lease Fisher  
 Lease No KS-6540  
 County Stafford

Well No. 1  
 State Kansas

Location Center S $\frac{1}{2}$  SW NE of 30-21S-12W  
 Elevation 1866 Feet

Drilled { Contract  
 Company Tools

Contracted Depth  
 Completed Depth

Feet  
 Feet

Date { Started  
 Completed  
 Deepened  
 Cleaned Out

4-15-44  
 4-21-44

Name of Contractor Campbell and Kuhn

Contract Price Per Foot Day Work

Well Estimated Cost Method of Drilling  
 Well Actual Cost

BEFORE SHOOTING

AFTER SHOOTING

Initial Production Flowing Initial Production Flowing  
 Settled Production on Pump Settled Production on Pump


Baume Test Water With Oil %

Casing Record			Torpedo Record				Size of Shell	Total Qts.
SIZE	SET	PULLED	Date Company	From	To	Feet		

This well was taken over from Appleman, et. al., who drilled the well to the Arbuckle Lime. See log of old well attached.

Plugged back from 3,696' to 3,657' with 5 sacks Calseal and 3 sacks cement.  
 Perforated pipe from 3,624' to 3,635' with 59 holes - no show of oil or water.  
 Perforated from 3,635' to 3,647' with 60 holes - no show.  
 Acidized with 1,000 gallons - swabbed dry - show of dead oil and some water.  
 Perforated Arbuckle Lime 3,650' to 3,656 $\frac{1}{2}$ ' with 55 holes - show of oil and water.

**PLUGGING**  
 FILE # 30 21S-12W  
 BOOK PAGE 116 21

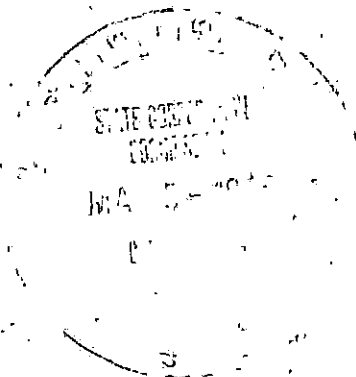

COMPANY - N. APPLEMAN CO. SEC. 30 T. 21 R. 12W  
 FARM - Fischer No. 1 CSL SW NE

Total Depth 3698'  
 Comm. 1-30-44 Comp. 3-1-44  
 Contractor Three-Way Drlg. Co.  
 Issued 3-25-44

COUNTY Stafford  
 KANSAS

Elevation 1866

Production Dry

CASING:  
 8 1/2" 286' Cen.  
 53/16" 3684'

Figures Indicate Bottom of Formations.

surface	35
sand & gravel	228
red bed	459
red bed & shells	680
anhydrite	715
red bed	740
shale & shells	900
shale & lime	1023
salt	1110
salt & shells	1240
shale & shells	1490
sdv lime	1540
lime	1625
shale & lime	1770
sdv shale	1820
lime & shale	2010
shale	2045
lime & shale	2507
shale	2670
shale & shells	2750
shale & lime	2872
lime	3027
lime & shale	3063
lime	3145
shale & lime	3175
lime	3190
shale	3276
shale & lime	3328
lime	3574
conglomerate	3652
lime & chert, no wtr or oil	3684
lime	3690
lime & shale, wtr	3698
Total Depth,	
Tops: Lansing-K.C.	3282
Conglomerate	3540
Viola	3628
Simpson	3650
Arbuckle	3656

PLUGGINGS  
 FILE # 30 21.21.12W  
 BOOK PAGE 116 12-21

