

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Rice County, Sec. 16 Twp. 21 Rge. (E) 7 (W)

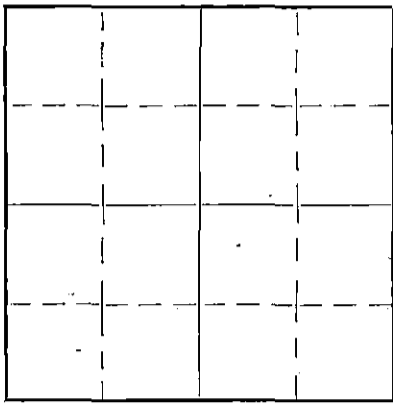

NORTH

Locate well correctly on above Section Plat

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SE SW NW
Lease Owner Smallow Oil Co
Lease Name Stange Well No. 3
Office Address
Character of Well (Completed as Oil, Gas or Dry Hole) Dry hole
Date, well completed 6/21/37 1937
Application for plugging filed 193
Application for plugging approved 193
Plugging Commenced April 11 1937
Plugging Completed .. 19 1937
Reason for abandonment of well or producing formation Dry hole
If a producing well is abandoned, date of last production 193

Name of Conservation Agent who supervised plugging of this well Guy Wierching
Producing formation Depth to top Bottom Total Depth of Well 3460 Feet.
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy Mud 3460 to 3370
Cement 3370 to 3355
Heavy mud to top of hole between plugs
15 ft. of Cement + Rock at 155'
10 ft. Cement plug at top of hole

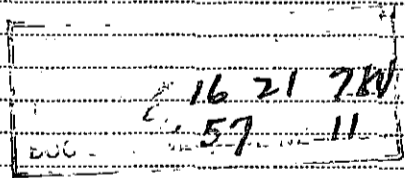

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to D. L. DAVIS,
Address 4th National Bank Bldg., Wichita, Ks.

STATE OF _____, COUNTY OF _____, ss.

_____ (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. M. Raymond

(Address)

SUBSCRIBED AND SWORN to before me this 20 day of April, 1939

My commission expires Nov. 25, 1939
Ernest W. Whiteside Notary Public.

SUNFLOWER OIL CO.
Stango No. 3.

SEC. 16 T. 21 R. 7W
SE SW NW

Total Depth. 3460'
Comm. 5-23-37 Comp. 6-21-37
Shot or Treated.
Contractor.
Issued. 7-31-37

County. Rice




CASING:
13" 117'
7" 3370'

Elevation.

Production. Dry

Figures Indicate Bottom of Formations.

clay & sand	38	lime sft	3412
sand	65	ohat sharp	3416
red sand rock	115	ohat	3428
shale	117	ohat sharp	3438
red bed & shells	380	ohat	3440
shale & shells	950	lime grey	3448
shale & lime breaks	1070	rod rock	3450
lime	1095	ohat & rod rock	3458
shale & shells	1180	lime drk	3460
lime	1258	Total Depth.	
lime & shale	1400		
lime	1440		
lime brkn	1539		
lime & shale	1643		
lime brkn	1750		
shale & shells	1935		
lime	1963		
shale & shells	2163		
sand	2173		
lime	2209		
shale & lime	2304		
lime	2334		
lime brkn	2390		
sand	2400		
shale & lime	2423		
lime	2441		
lime brkn	2461		
lime	2506		
lime & shale	2600		
lime	2607		
shale & lime	2668		
lime hrd	2700		
brkn lime	2760		
sdv lime	2780		
lime	2812		
lime & shalo	2860		
lime	2985		
sdv lime	3000		
lime	3019		
sand	3035		
brkn lime	3073		
lime hrd	3128		
lime brkn	3159		
lime	3178		
shale	3184		
SIM Corr. 3184-3188			
brkn lime	3229		
lime	3325		
lime & shalo	3332		
lime hrd	3359		
shalo & lime	3370		
shalo, conglomerate	3374		
shale	3383		
oil show 3383-3388			
conglomerate	3405		

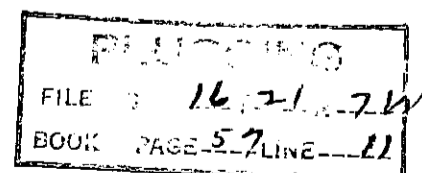

SUNFLOWER OIL CO.
 Stango No. 3.

SEC. 16 T. 21 R. 7W
 SE SW NW

Total Depth. 3460'
 Comm. 5-23-37 Comp. 6-21-37
 Shot or Treated.
 Contractor.
 Issued. 7-31-37

69.
121.
1/2

County. Rice



CASING:
 13" 117'
 7" 3370'

Elevation.

Production. Dry

Figures Indicate Bottom of Formations.

clay & sand	38	lime sft	3412
sand	65	chat sharp	3416
red sand rock	115	chat	3428
shale	117	chat sharp	3438
red bed & shells	380	chat	3440
shale & shells	950	lime grey	3448
shale & lime breaks	1070	rod rock	3450
lime	1095	chat & rod rock	3458
shale & shells	1180	lime drk	3460
lime	1258	Total Depth.	
lime & shale	1400		
lime	1440		
lime brkn	1539		
lime & shale	1643		
lime brkn	1750		
shale & shells	1935		
lime	1963		
shale & shells	2163		
sand	2173		
lime	2209		
shale & lime	2304		
lime	2334		
lime brkn	2390		
sand	2400		
shale & lime	2423		
lime	2441		
lime brkn	2461		
lime	2506		
lime & shale	2600		
lime	2607		
shale & lime	2668		
lime hrd	2700		
brkn lime	2760		
sdv lime	2780		
lime	2812		
lime & shale	2860		
lime	2985		
sdv lime	3000		
lime	3019		
sand	3035		
brkn lime	3073		
lime hrd	3128		
lime brkn	3159		
lime	3178		
shale	3184		
SLM Corr. 3184-3188			
brkn lime	3229		
lime	3325		
lime & shale	3332		
lime hrd	3359		
shale & lime	3370		
shale, conglomerate	3374		
shale	3383		
oil shcw 3383-3388			
conglomerate	3405		

150 SAX OIL MAX.

6/16/37-7

6.3 per sack

16 21 7W
57 11