


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

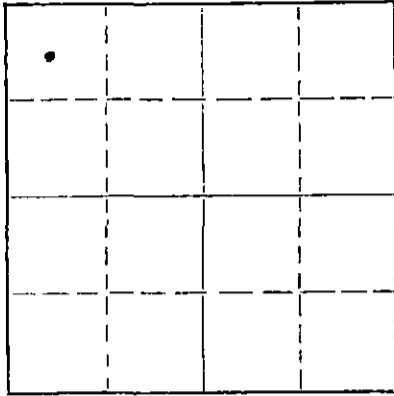

Locate well correctly on above
Section Plat

Rice County, Sec. 25 Twp. 21S Rge. 8 (E) (W)
Location as "NE/CNW/SW" or footage from lines C NW NW
Lease Owner H. L. Herbel
Lease Name L. J. Driver Well No. 2
Office Address P.O. Box 327, Chase, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 19
Application for plugging filed Sept. 4 1968
Application for plugging approved 19
Plugging commenced Sept. 6 1968
Plugging completed Sept. 9 1968
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation Depth to top Bottom Total Depth of Well 3475 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	258'	8 5/8"	258'	none
		0	3474'	5 1/2"	3474'	2833.22

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pushed plug to 3350', set 10' sand bridge and dumped 5 sacks of cement.
Pushed plug to 250', set 10' rock bridge and dumped 25 sacks of cement.
Filled hole with mud to 40' and capped hole with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 18 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Pipe Pullers, Inc.
Address Box 486, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Evelyn Roth (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of September, 1968
Serge A Meyer Notary Public.

My commission expires Feb. 10, 1971

THE PURE OIL COMPANY
WELL LOG AND RELATED DATA

DIVISION Northern Producing DISTRICT Central (Buffalo-Kansas) LEASE Driver, L. J.
ACRES 160 LEASE NO. 29468 AFE NO. 4465 ELEVATION Grid 1624', D.F. 1626' WELL NO. 2
TWP. 25 TWP. 21 S RGE. 8 W PRCT.-DIST.-TWP. (Bell Prospect-Bull Creek Miss. Pool)
SURVEY _____ COUNTY Rice STATE Kansas

LOG			
FROM	TO	TOTAL	FORMATION
0	3366	3366	Sand, lime & shale
3366	BASAL PENN. CONG.		(E.L. Top)
3366	3368	2	Chert & shale
3368	MISS. CHAT		(E.L. Top)
3368	3410	42	Chert & shale
3410	KINDERHOOK		(E.L. Top)
3410	3475	65	Shale
3475			TOTAL DEPTH
	PLUGGED BACK		
3475	3458	17	Cmt. in 5 1/2" casing.
3458			TOTAL DEPTH PB

(All measurements taken from top of rotary bushing which is 3' above derrick floor.)

5000
21500
26500
5000
20000
25000
150'

RECEIVED
STATE CORPORATION COMMISSION
SEP 5 1968
CONSERVATION DIVISION
Wichita, Kansas

LOCATION

4620 FEET NORTH OF SOUTH SECTION LINE
660 FEET EAST OF WEST SECTION LINE
660 FEET SOUTH OF NORTH SECTION LINE
4620 FEET WEST OF EAST SECTION LINE

SCALE 2"=1 MILE

CASING AND CEMENTING RECORD			
SIZE CASING	8-5/8"	5-1/2"	
THREAD	8 rd	8 rd	
WEIGHT	24#	14#	
GRADE	J-55	J-55	
CONDITION	A	A	
SET AT	258'	3474'	
SACKS CEMENT	280	125	
SIZE OF HOLE	12-1/4"	7-7/8"	

Temp. survey 5-30-61 indicated top of cement behind 5 1/2" casing @ 2850'.

LINER RECORD						
SIZE	WT.	COND.	LENGTH	BLANK	PERF.	SET AT

GUN PERFORATING RECORD					
DATE	CASING	FROM	TO	SIZE SHOTS	NO. SHOTS
5-31-61	5-1/2"	3367	3368	Jat.	8
		3369	3398	"	76

SHOT OR ACID RECORD				
DATE	TOP	BOTTOM	SHOT-ACID	REMARKS
6-2-61	3367	3398	250 GMA,	10,000 G. crude, 500 Adomite, 10,000# sand, 40 ball sealers.
7-19-61	3367	3398	14,280 G.	5% acid-frac, 15 G. W-26, 300# D-99, 35,000# sand.

DRILLING: COMMENCED 5-20-61 COMPLETED 5-28-61
ELECTRICAL SURVEY BY Schlumberger (1) DATE 5-28-61
DRILLED WITH (Gabbert & Jones) Rotary TOOLS
DRILLED IN WITH (Gabbert & Jones) Rotary TOOLS
FIRST PROD.—NAT. DATE Dry Hole HRS. _____ BBLs. _____ OIL
WATER _____ M CU. FT. GAS _____ LBS. ROCK PRESS.
FIRST PROD. AFTER ACID—DATE Dry Hole HRS. _____ BBLs. _____ OIL
WATER _____ M CU. FT. GAS _____ LBS. ROCK PRESS.
GAS/OIL RATIO _____ POTENTIAL Dry Hole BBLs. _____
GRAVITY _____ TEMP. _____ GRADE _____
(1) Sonic & Laterologs (3474)

DATE ABANDONED—SOLD _____