


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

NORTH

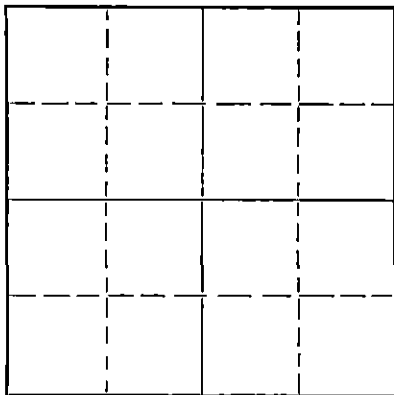

Locate well correctly on above  
Section Plat

Rice County. Sec. 3 Twp. 21S Rge. 8 (E) (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE/4 SE/4 SW/4  
Lease Owner Sterling Drilling Company  
Lease Name Humphreys Well No. 1  
Office Address Sterling, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed March 8 19 51  
Application for plugging filed March 6 19 51  
Application for plugging approved March 6 19 51  
Plugging commenced March 8 19 51  
Plugging completed March 8 19 51  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Ruel E. Durkee  
Producing formation Depth to top Bottom Total Depth of Well 3695 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation | Content | From | To | Size   | Put In | Pulled Out |
|-----------|---------|------|----|--------|--------|------------|
|           |         |      |    | 8-5/8" | 215'   |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |
|           |         |      |    |        |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Gunned the pits. Circulated the hole.  
Set plug at 210'. Ran 15 sacks cement  
through 7 joints of drill pipe. Set plug  
at 30'. Put in 5 sacks.

STATE OF KANSAS  
MAY 13 1951

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Sterling Drilling Company  
Address Sterling, Kansas

STATE OF Kansas, COUNTY OF Rice, ss.  
Rollin Mead

(owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Rollin Mead  
Rollin Mead  
Sterling Drilling Co., Sterling, Ks.  
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of March, 19 51

My Commission Expires Sept. 17, 1953

My commission expires Notary Public.

28-3273-a-10M  
PLUGGING  
FILE SEC 3 T 11 R 8  
BOOK PAGE 66 LINE 33

## STERLING DRILLING CO.

STERLING, KANSAS

WELL LOG ----- HUMPHREYS #1

Location - SE/4 SE/4 SW/4 of Section 3-21S-8W, Rice County, Kansas

Owner - Sterling Drilling Company et al  
Contractor - Sterling Drilling CompanyCommenced - 2-23-51  
Completed - 3-8-51 (w/r)

Total Depth - 3695' (w/r)

ELEVATION: 1647' DFLOG

|           |                  |
|-----------|------------------|
| 0- 85     | Surface Sand     |
| 85- 175   | Shale            |
| 175- 215  | Red Bed          |
| 215- 230  | Shale            |
| 230- 245  | Anhydrite        |
| 245- 830  | Shale            |
| 830-1050  | Shale and Shells |
| 1050-2615 | Shale and Lime   |
| 2615-2695 | Lime             |
| 2695-2905 | Lime and Shale   |
| 2905-3271 | Lime             |
| 3271-3325 | Conglomerate     |
| 3325-3432 | Shale            |
| 3432-3505 | Lime             |
| 3505-3552 | Shale            |
| 3552-3620 | Shale and Lime   |
| 3620-3678 | Shale and Sand   |
| 3678-3695 | Arbuckle Lime    |

CASING RECORD215' of 8-5/8" Surface Pipe  
Cemented with 125 Sacks CementPRODUCTION: Dry and AbandonedRECEIVED  
STATE CORPORATION COMMISSION

MAR 13 1951

CONSERVATION DIVISION  
- Wichita, Kansas

|                       |
|-----------------------|
| PLUGGING              |
| FILE SEC 3 T 21 S 8 W |
| BOOK PAGE 66 LINE 33  |