


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Barton County. Sec. 17 Twp. 16 Rge. 12 (E) (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C.W/2 SW NE
Lease Owner Franco Central Oil Company
Lease Name Lambert Well No. 1
Office Address 306 4th Nat'l Bk. Bldg. Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 7 19 48
Application for plugging filed September 6 19 48
Application for plugging approved September 6 19 48
Plugging commenced September 7 19 48
Plugging completed September 9 19 48
Reason for abandonment of well or producing formation Dry Hole
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

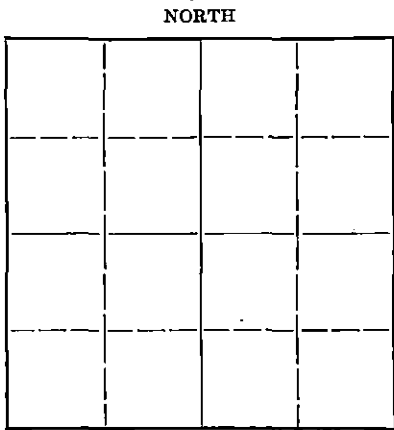

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well
Producing formation no Depth to top Bottom Total Depth of Well 3,360' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand	water	315	325	12 $\frac{1}{2}$ "	462'	462'
Sand	water	405	475	10-3/4"	814'	814'
Sand	water	450	460	8-5/8"	2521'	2521'
Lime	water	1800	1850	5-1/2"	3332'	3332'
Lime	water	2020	2100			
KC lime	water	3059	3065			
Lime	gas & oil show		1755			
Quartzitic Sand	Oil show	3307	3311			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pulled 5-1/2" casing - mudded hole as casing was pulled from 3360' to 900'
Pulled 8-5/8" casing - mudded hole set plug 900' dumped 20 sacks of cement. Pulled 10 & 12" casing - mudded hole from 880' to 250' - bridged hole at 250' with rock. Dumped 20 sacks of cement mudded hole from 230' to 30' - filled to cellar with rock and cement, with a cement cap on top of hole.

10-14-48
15-1248

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to
Address

STATE OF Kansas, COUNTY OF Sedgwick, ss.
J. M. Clothier (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *J. M. Clothier*
(Address)

SUBSCRIBED AND SWORN to before me this day of 19
My commission expires July 11, 1951
My commission expires

Levi Mathews
Notary Public.

22-287 7-47-10M
BOOK 17-16-212
PAGE 56

WELL RECORD AND LOG

Well No. #1 Lambert Farm
 Location W/2 SW NE Sec. 17 Twp. 16 Range 12
 County Barton Franco Central Oil Company
OPERATOR
 Rig Commenced _____ 19____
 Rig Completed _____ 19____ CONTRACTOR
 Drilling Commenced July 26, 19 48 Harry Goro
 Drilling Completed Sept. 7, 19 48 CONTRACTOR
 Initial Production Dry Hole

CASING AND TUBING

WATER RECORD

SIZE	WT. PER FT.	PUT IN WELL		LEFT IN WELL		
		FEET	INCHES	FEET	INCHES	
						4 B W per Hr. 315-325
						H F W 405-415
12 1/2"		462'		Pulled		H F W 450-460
10 3/4"		814'		Pulled		1 B W Per Hr. 1800-1810
8 5/8"		2521'		Pulled		1 B W Per Hr. 1840-1850
5 1/2"		3392'		Pulled		1 B W Per Hr. 2020-2025
						2 B W Per Hr. 2090-2100
						1/3 B W Per Hr. 2790-2800
						1/3 B W Per Hr. 2920
						1/3 B W Per Hr. 3059-3065

SAND RECORD

NAME	TOP	BOTTOM	FEET OF SAND	REMARKS
Lime		1755		Show of Gas
Quartzitic Sand	3307	3311	4	Show of Oil

TOTAL DEPTH 3360
 SHOT _____ 19____ BY _____
 SIZE OF SHOT _____ SAND SHOT _____
 PRODUCTION FIRST 24 HOURS _____ GRAVITY _____

STATE OF Kansas, COUNTY OF Sedgwick, ss.

I, the undersigned, being duly sworn on oath, states that the above and within statement is a true and correct record and log of the well drilled on the location above described.

[Signature]

 Subscribed and sworn to before me this 13th day of October, 1948
 My commission expires July 11, 1951 *[Signature]*

 Notary Public.

PLUGGING
 FILE SEC 17-T16-R120
 BOOK PAGE 56 LINE 2

FORMATION	FROM	TO	FEET	FORMATION	FROM	TO	FEET
Soil & Sand	0	25	25	Shale	2290	2295	5
Blue Shale	25	210	185	Lime	2295	2305	10
Red Rock	210	270	60	Shale	2305	2310	5
Blue Shale	270	300	30	Lime	2310	2317	7
Red Rock	300	315	15	Shale	2317	2335	18
Sand	315	335	20	Lime	2335	2345	10
Blue Shale	335	405	70	Shale	2345	2360	15
Sand	405	415	10	Red Rock	2360	2370	10
Blue Shale	415	450	35	Blue Shale	2370	2376	6
Sand	450	470	20	Lime	2376	2395	19
Blue Shale	470	510	40	Shale	2395	2400	5
Red Rock	510	805	295	Shells & Shale	2400	2410	10
Anhydrite Lime	805	830	25	Shale	2410	2415	5
Red Rock	830	1030	200	Lime	2415	2425	10
Blue Shale	1030	1070	40	Shale	2425	2453	28
Red Rock	1070	1125	55	Lime	2453	2470	17
Blue Shale	1125	1235	110	Shale	2470	2475	5
Salt	1235	1485	250	Lime	2475	2485	10
Shale	1485	1490	5	Shale	2485	2510	25
Lime	1490	1515	25	Lime	2510	2530	20
Shells & Shale	1515	1545	30	Shale	2530	2538	8
Lime	1545	1570	25	Lime	2538	2550	12
Blue Shale	1570	1575	5	Shale	2550	2565	15
Lime	1575	1605	30	Lime	2565	2575	10
Shale	1605	1620	15	Shale	2575	2580	5
Lime	1620	1650	30	Lime	2580	2615	35
Shale	1650	1665	15	Shale	2615	2625	10
Lime	1665	1700	35	Lime	2625	2635	10
Blue Shale	1700	1705	5	Shale	2635	2650	15
Lime	1705	1710	5	Lime	2650	2670	20
Blue Shale	1710	1720	10	Shale	2670	2687	17
Lime	1720	1725	5	Lime	2687	2827	140
Red Rock	1725	1735	10	Shale	2827	2835	8
Lime	1735	1760	25	Lime	2835	2970	135
Shale	1760	1765	5	Shale	2970	2980	10
Lime	1765	1865	100	Dodge Lime	2980	3000	20
Blue Shale	1865	1875	10	Red Rock	3000	3003	3
Lime	1875	1925	50	Shale	3003	3059	56
Shale	1925	1930	5	K. C. Lime	3059	3095	36
Lime	1930	1945	15	Shale	3095	3100	5
Red Rock	1945	1955	10	Lime	3100	3148	48
Lime	1955	1995	40	Shale	3148	3151	3
Red Rock	1995	2000	5	Lime	3151	3259	108
Lime	2000	2068	68	Shale	3259	3268	9
Red Rock	2068	2085	17	Lime	3268	3285	17
Lime	2085	2160	75	Shale	3285	3290	5
Shale	2160	2170	10	Lime	3290	3307	17
Red Rock	2170	2182	12	Quartzitic Sand	3307	3314	7
Lime	2182	2190	8	Conglomerate	3314	3325	11
Shale	2190	2200	10	Grey Shale	3325	3328	3
Lime	2200	2250	50	Quartzitic Sand	3328	3337	9
Shale	2250	2267	17	Grey Shale	3337	3340	3
Lime	2267	2282	15	Quartzitic Sand	3340	3345	5
Shale	2282	2286	4	Sand	3345	3360	15
Lime	2286	2290	4	Total Depth		3360	