


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

NORTH

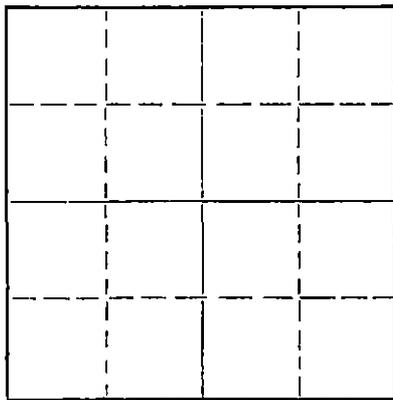

Locate well correctly on above  
Section Plat

Rice County, Sec. 27 Twp. 20S Rge. 6 (E) W (W)  
Location as "NE/CNW/SW" or footage from lines G NE NW  
Lease Owner Plains Exploration Co.  
Lease Name Wernet Well No. 5  
Office Address Denver, Colo.  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed April 7 1965  
Application for plugging filed October 10, 1969  
Application for plugging approved October 13, 1969  
Plugging commenced Oct. 20 1969  
Plugging completed Oct. 25 1969  
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production September 1969  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3403 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	PUT IN	PULLED OUT

RECEIVED  
OCT 30 1969  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sanded back to 3360' and dumped 6 sacks of cement. Shot pipe off at 3009,60'. Pulled pipe and mudded hole to 210'. Set rock bridge from 210' to 200' and dumped 30 sacks of cement. Finished mudding hole and dumped 10 sacks of cement at top.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bert Self  
Address Hutchinson, Kans.

STATE OF Kans. COUNTY OF Reno, ss.  
Employee (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Bert Self

R. R. #4, Hutchinson, Kans. 67501  
(Address)

Subscribed and Sworn to before me this 25th day of October, 1969

Wardley Self  
Notary Public.

October 18, 1973

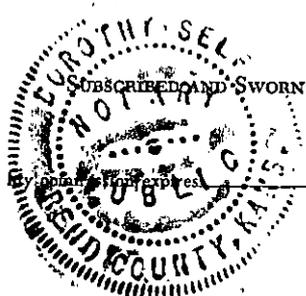

Copy

15.159.30067.0000

STERLING DRILLING COMPANY  
Sterling, Kansas

WELL LOG-----Wernet #5

LOCATED: C NE NW Section 27-20S-6W, Rice County, Kansas

OWNER: Plains Exploration Company  
ROTARY DRILLING CONTRACTOR: Group Exploration Company

COMMENCED: March 22, 1965  
COMPLETED: March 29, 1965

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 13 1969  
CONSERVATION DIVISION  
Wichita, Kansas

ROTARY TOTAL DEPTH: 3384'

CASING RECORD

LOG

0 - 170	Clay & Shale
170 - 600	Shale & Red Bed
600 - 1070	Lime & Shale
1070 - 1300	Lime
1300 - 2570	Lime & Shale
2570 - 2654	Lime
2654 - 2738	Sand & Lime
2738 - 2760	Shale
2760 - 2845	Shale & Lime
2845 - 3265	Lime
3265 - 3320	Lime & Shale
3320 - 3379	Lime
3379 - 3384	Mississippi Lime T.D.

Ran 4 joints 9 5/8" Spiral Weld casing. 161' pipe set at 167' K.B. Cemented with 170 sacks HA-5. Plug down at 2:00 a.m.

Ran 86 joints 7" O.D. casing. 3387.68' pipe set at 3383' K.B., cemented with 55 sacks regular cement. Plug down at 9:00 a.m.

CABLE TOOL COMPLETION:

March 29, 1965: Sterling Drilling Company's cable tools on location.

April 1, 1965: Rigged up, swabbed down hole, drilled rubber plugs and 12' of good cement.

April 2, 1965: Drilled cement and shoe, 1' of new hole. Drilled 4' to 3389'. Fluid muddied, slightly red. Drilled 4' to 3393', fluid very muddy, slightly red. No oil showing. Drilled 4' to 3397'. Drilled 4' to 3401'. Fluid not as muddy. Thirty-five minute test got 5 gal. slightly muddy water with some spots of live free oil with good odor.

April 3, 1965: No pressure. No gas to surface. Bailed 23 gal. fluid with scum of good live beady oil with good odor. Sixteen-hour fillup. Drilled 2' to 3403'.

April 17, 1965: Ninety-hour fillup. Showed 105 gal. fluid, about 1 1/2 gal. with frothy, badly cut, but showed live oil with good odor.