


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

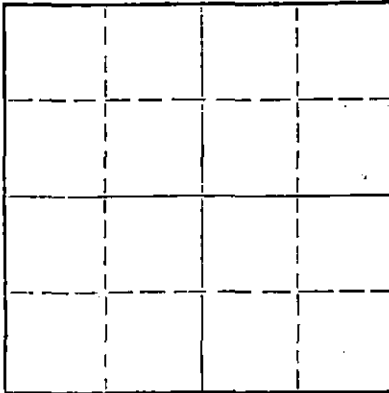

Locate well correctly on above
Section Plat

Barton County. Sec. 12 Twp. 20S Rge. (E)13 (W)

Location as "NE/CNW&SW" or footage from lines. C E/2 NW NW

Lease Owner Donald T. Ingling et al

Lease Name Panning Well No. 1

Office Address 615 First National Bank Bldg., Wichita, Ks.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 19 1970

Application for plugging filed Verbal Request 19

Application for plugging approved Verbal Approval 19

Plugging commenced June 19, 19 70

Plugging completed June 19, 19 70

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8" | 209' | None |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 3,460 feet (rotary total depth) to 450 feet. Set bottom plug at 450 feet and cement with 200 sacks cement. Fill hole with heavy rotary mud to 200 feet. Set plug at 200 feet and cement with 25 sacks cement. Fill hole with heavy rotary mud to 40 feet. Set plug at 40 feet and cement to cellar with 10 sacks cement, 2 sacks cement in rathole.

RECEIVED
STATE CORPORATION COMMISSION
JUN 23 1970
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor H-30, Inc. (If additional description is necessary, use BACK of this sheet)
Address 200 North Main - Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Arlo B. Romer, Agent (Agent of owner) or (Agent of operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Arlo B. Romer

200 North Main - Wichita, Ks. 67202
(Address)

SWORN TO before me this 22nd. day of June, 1970

January 23, 1972

Joanne J. Steinman
Notary Public.



KANSAS GEOLOGICAL SOCIETY
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

15.009.20510.0000

COMPANY Donald T. Ingling, et al

SEC. 12 T. 20S R. 13W
 LOC. C E/2 NW NW

FARM Panning

NO. 1


TOTAL DEPTH 3,460'
 COMM. June 12, 1970

COMP. June 19, 1970

COUNTY Barton

KANSAS

SHOT OR TREATED
 CONTRACTOR H-30, Inc.
 ISSUED



CASING

| | | | |
|----|----------|---------------------------------|-------------------|
| 20 | 10" | | |
| 15 | 8 - 5/8" | 209' cemented w/ 200 sx cement. | ELEVATION 1846 KB |
| 12 | 6 | | |
| 13 | 5 | | |

PRODUCTION

| | | | | |
|--------------------|------|------------------------------------|--------|------|
| | | FEET INDICATE BOTTOM OF FORMATIONS | | |
| Sand | 150 | | | |
| Red Bed & Sand | 209 | Sample Tops | | |
| Shale | 275 | Brown Lime | 3189 - | 1343 |
| Shale & Red Bed | 665 | Lansing-Kansas City | 3201 - | 1355 |
| Anhydrite | 695 | Arbuckle | 3438 - | 1592 |
| Shale | 1500 | Rotary T.D. | 3460 - | 1614 |
| Lime & Shale | 2030 | | | |
| Shale | 2395 | | | |
| Shale & Lime | 2705 | | | |
| Lime & Shale | 2972 | | | |
| Lime | 3190 | | | |
| Lime & Shale | 3275 | | | |
| Lime | 3460 | | | |
| Rotary Total Depth | 3460 | | | |

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Arlo B. Romer

 Arlo B. Romer


STATE OF KANSAS }
 COUNTY OF SEDGWICK } SS:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 22nd. day of June, 1970/

Joanne J. Steinman

 Joanne J. Steinman-Notary Public

Commission Expires:
 January 23, 1972



RECEIVED
 STATE CORPORATION COMMISSION
 JUN 23 1970
 CONSERVATION DIVISION
 Wichita, Kansas