

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely,
Make Required Affidavit
Mail or Cover Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

NORTH

Section flat grid for well location mapping.

Locate well correctly on above
Section Flat

Barton County, Sec. 1 Twp. 20 Rge. 13 (E) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NE NE NW
Lease Owner W. L. Hartman
Lease Name Powell Well No. 2
Office Address P. O. Box 54 - Wichita, Kansas
Character of Well (completed as Oil; Gas or Dry Hole) Dry Hole
Date well completed 6-29-48 19
Application for plugging filed 10-7-48 19
Application for plugging approved August 25 19 48
Plugging commenced 8-7- 19 48
Plugging completed 8-20 19 48
Reason for abandonment of well or producing formation Dry
If a producing well is abandoned, date of last production None 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough - P. O. Box 207 - Great Bend, Ks.
Producing formation Depth to top Bottom Total Depth of Well 3471' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with columns: Formation, Content, From, To, Size, Put In, Pulled Out.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from 3196 feet to 0 feet for each plug set.

3196 to 3180 Ft. Filled with mud
3180 to 3160 Ft. Dumped 6 sx. cement
3160 to 200 Ft. Mudded
200 to 190 Ft. Rock bridge
190 to 170 Ft. Dumped 15 sx. cement
170 to 10 Ft. Mud
10 to 5 Ft. Rock bridge
5 Ft. to cellar Cement, 10 sx.

10-8-48

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to W. L. Hartman
Address P. O. Box 54 - Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
W. L. Hartman (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) [Signature]

P. O. Box 54 - Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this: 7th day of October, 19 48.

[Signature] Notary Public.

My commission expires July 14th, 1951

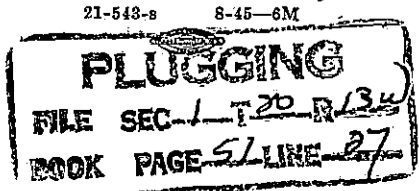

POWELL #2Casing Record:

10 3/4" 355'

7" 3437 1/2'

Company: W. L. HartmanContractor: H & H Drilling Co.Commenced: April 27, 1948Completed: June 29, 1948Location:NE NE NW of
Sec. 1-20-13W Barton Co.
KansasElevation: 1829' d.f.
Potential: Dry

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Sand	0	175	
Shale Blue	175	220	
Red Sand	220	300	
Red Ben	300	355	Set 355' of 10 3/4" pipe
Red Bed	355	690	
Shale-Sand Red Bed	590	1140	
Shale & shells	1140	1500	
Shale	1500	1625	
Shale & Lime	1625	1735	
Lime Broken	1735	1855	
Lime & Shale	1855	2000	
Lime	2000	2085	
Lime	2085	2200	
Lime & Shale	2200	2330	
Lime	2330	2426	
Lime Broken	2426	2530	
Shale & Lime	2530	2645	
Lime & Shells	2760	2835	
Lime	2835	2895	
Lime & Shale	2895	2985	
Lime	3055	3155	
Lime	3155	3205	"Brown Ls. 3158'
Lime	3205	3285	Lansing 3178'
Lime	3285	3370	3252'-74' Break no show
Lime	3370	3410	3324-29
Lime	3410	3440	Conglomerate 3410' Arbuckle 3437'

CABLE TOOLS

Cement Plug & Trace of float Collar	3408	3409	
Float Collar	3409	3410	
Cement	3410	3428	
Cement	3428	3434	
Cement	3434	3436	
Shoe	3436	3438	
Foramtion	3438	3439	
Lime	3442	3444	3440-3441 After standing three hrs. a fair show of dead oil (about a pint)
Lime	3443	3444	
Lime	3444	3445	
Lime	3445	3446	
Lime-	3446	3458	
Lime Shale	3458	3463	
Lime Green Shale	3463	3467	
Lime Trace Green Shale	3467	3469	
Lime	3471		T. D.

