


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

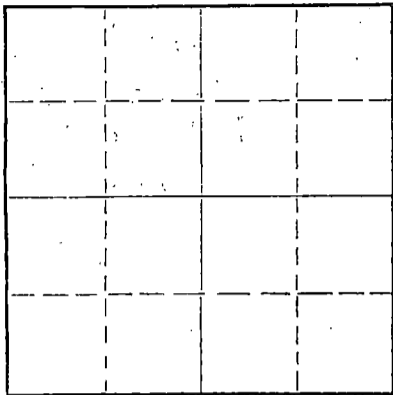

Locate well correctly on above
Section Plat

McPherson County, Sec. 13 Twp. 19S Rge. 3 (E) W (W)
Location as "NE/CNW/SW" or footage from lines
Lease Owner Art Small
Lease Name Goering Well No. 1
Office Address R. R. #3, Salina, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed May 1965
Application for plugging filed Sept. 30 1967
Application for plugging approved Sept. 27 1967
Plugging commenced October 5 1967
Plugging completed October 5 1967
Reason for abandonment of well or producing formation: NOT Commercial

If a producing well is abandoned, date of last production Jan 1967
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation Mississippian Depth to top 2928 Bottom 2952 Total Depth of Well 2967 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud from 2967' to 2300'. Push plug to 2300'. Dumped 5 sacks cement from 2300 to 2250'. Shot pipe off at 1965.50'. Pulled pipe and mudded hole from 2250' to 170'. Set rock bridge from 170' to 160'. Dumped 25 sacks of cement from 160' to 100'. Mudded hole from 100' to 40'. Set rock bridge from 40' to 30' and dumped 10 sacks of cement to top of surface.

RECEIVED
OCT 11 1967
10-11-67
CONSERVATION DIVISION
WICHITA, KANSAS

Name of Plugging Contractor Bert Self (If additional description is necessary, use BACK of this sheet)
Address Hutchinson, Kans.

STATE OF KANSAS, COUNTY OF Reno, ss. Kans. Employee (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bert Self
R. R. #4, Hutchinson, Kans. (Address)

SUBSCRIBED AND SWORN TO before me this 9th day of October, 1967

My commission expires October 18, 1969

Notary Public.



DONALD J. MELLAND * GEOLOGIST

Phones: CHI-1675 CHI-4582 * Box 783 * McPHERSON, KANSAS

GEOLOGICAL REPORT

S & H Oil Company
Goering # 1
CSE NW, Sec. 13-19-3W
Field: Chindberg
McPherson County, Kansas

May 18, 1965
Elevation: 1529 RB est.
Comm: 4/2/65; Comp: 4/8/65
Casing: 8-5/8" @ 158'/105sx
5-1/2" @ 2967'/200sx

FORMATION TOPS

Lansing
Mississippian
RTD

2331 (-802)
2908 (-1379)
2967 (-1438)

Perf. 2342' to 2352'
Perf. 2926-2934
Perf. 2946-2952
Plug back to 2359'
Drill out plugs &
perf. bottom.

Cores: None

Drill Stem Tests: None

Electrical Logs: None

(All measurements taken from rotary bushing)

FORMATION SUMMARY

LANSTING

2342-2348 Limestone: buff, finely crystalline, oolitic, oolitic, fair pinhole porosity, good show of live oil, uniform stain, strong odor. This zone should be located on a gamma ray-neutron log and tested through perforations.

MISSISSIPPIAN

2924-2938 White sharp chert with included white leached chert, poor to fair pinhole porosity in leached chert, no show of live oil, slight trace of stain, no odor. This zone may be gas bearing and should be tested before well is abandoned.

2926-2934
2946-2952

RECEIVED
OCT - 4 1965
CONSERVATION DIVISION
Wichita, Kansas

2943-2954 White and buff sharp chert with included white leached chert, poor to fair pinhole porosity in leached chert, show of live oil, spotted light stain, faint odor. This zone should be located on a gamma ray-neutron log and tested through perforations.

RECOMMENDATIONS

It is recommended that casing be set at a depth of 2967 feet and the recommended zones tested.

RECEIVED
JUL 1 1961
CONTRACTING DIVISION
WARRANTS SECTION

Respectfully submitted,



Donald J. Melland

DJM/f

DRILLING TIME

S & H Oil Company
Goering # 1

Sec. 13-19-3W
CSE NW

Elevation: 1529 RB est.
McPherson County, Kansas

Depth	Time										Remarks
2200-2210	2	1	2	1	2	1	1	2	2	2	
20	2	2	5	4	3	3	2	3	3	3	
30	2	2	2	2	2	2	2	2	1	2	
40	2	2	1	2	2	1	2	4	4	3	
50	4	4	3	3	3	3	3	2	2	2	
60	2	2	2	3	2	3	3	3	2	3	
70	2	2	3	2	2	3	3	3	2	2	Trip @ 2270'
80	2	2	1	1	1	1	1	2	2	2	
90	2	2	3	2	2	2	2	1	1	1	
2290-2300	1	2	3	4	2	1	1	1	2	1	
10	1	1	2	1	1	1	2	1	1	1	
20	2	1	1	2	2	1	1	1	1	1	
30	1	1	1	1	1	1	1	1	1	1	
40	1	2	3	3	2	3	3	2	1	2	
50	2	2	1	1	1	1	1	1	2	2	Circ. @ 2350'
60	4	2	2	3	2	3	2	3	2	4	
70	3	3	2	3	3	2	3	3	3	3	
80	3	3	4	3	3	3	3	3	3	3	
90	4	4	8	4	4	4	3	4	4	5	
2390-2400	4	4	4	4	4	4	5	4	4	3	
10	4	4	3	4	3	3	5	5	5	4	
20	3	2	3	3	2	3	4	3	4	4	
30	4	3	3	3	2	4	4	6	3	6	
40	5	9	9	4	2	3	2	2	2	1	Trip @ 2433'
50	1	1	1	2	2	1	2	2	1	2	
60	2	2	3	2	1	1	3	3	2	2	
70	1	2	1	2	2	1	1	2	1	1	
80	3	2	3	2	2	3	3	1	3	3	
90	2	4	3	4	2	3	4	3	4	4	
2490-2500	5	4	2	2	3	3	4	4	4	4	
10	4	4	4	4	3	4	4	4	2	1	
20	3	3	3	3	3	4	3	3	4	3	
30	4	4	4	4	3	4	3	2	3	3	
40	3	4	3	2	2	2	2	3	3	4	
50	3	4	4	3	4	3	4	3	3	4	
60	5	4	8	3	4	3	4	4	5	4	Trip @ 2553'
70	5	4	4	5	5	5	5	5	4	4	
80	5	5	4	5	4	4	3	3	3	3	
90	3	3	3	3	4	4	5	5	7	7	
2590-2600	5	5	4	2	3	2	3	5	3	3	

U.S. GEOLOGICAL SURVEY
 McPherson, Kansas
 1951

Goering # 1

Drilling Time

Page 2

Depth	Time										Remarks
2600-2610	2	1	2	4	5	4	4	5	5	6	
20	4	5	4	5	5	6	8	6	4	7	
30	7	7	8	7	6	6	6	6	5	6	Trip @ 2630'
40	5	5	6	6	5	7	7	7	6	6	
50	5	3	2	3	3	4	4	4	4	4	
60	3	4	4	3	4	4	4	4	4	4	
70	3	3	4	3	4	5	4	5	4	5	
80	5	5	3	3	4	3	2	4	4	4	
90	3	4	3	4	5	5	5	5	5	6	
2690-2700	5	4	5	5	5	5	5	5	5	4	
10	3	3	3	5	6	4	4	6	6	3	
20	3	3	2	2	1	2	3	4	5	4	
30	6	4	4	2	4	5	4	2	3	4	
40	7	6	7	5	6	4	3	5	5	4	
50	4	5	4	5	4	4	3	3	2	4	
60	5	5	4	6	5	4	4	4	5	6	
70	6	6	4	4	3	6	6	5	4	5	
80	6	7	2	7	7	6	4	4	4	5	
90	6	5	5	5	7	4	4	3	2	1	
2790-2800	3	3	3	4	4	3	3	3	3	5	
10	8	5	4	5	4	4	4	4	5	5	
20	6	6	6	5	4	5	4	3	2	2	
30	1	2	3	5	7	7	7	5	5	5	
40	5	5	5	5	4	4	4	3	3	3	
50	3	5	4	4	4	3	4	3	4	4	
60	6	4	4	5	5	4	5	5	5	5	
70	6	7	7	5	5	6	4	3	4	3	
80	3	5	2	1	1	2	2	4	3	2	
90	1	2	2	3	5	5	4	3	2	2	
2890-2900	3	2	3	4	2	2	3	3	3	4	
10	4	4	3	2	3	2	2	2	3	2	
20	3	4	3	2	2	4	3	4	3	2	
30	3	1	3	3	2	2	2	2	1	1	
40	3	1	1	1	2	2	2	1	2	3	
50	5	2	4	3	3	3	3	3	3	3	
60	3	3	3	3	2	2	4	4	8	6	
2960-2967	5	6	6	3	4	9	4				

RECEIVED
 DEPT - A 1961
 GEOPHYSICAL DIVISION
 UNITED STATES GEOLOGICAL SURVEY

Circ. @ 2945'
 Circ. @ 2957'
 Circ. @ 2967'