


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Barton County, Sec. 1 Twp. 20S Rge. 11W (E).....(W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines CSE SE
Lease Owner Courtney B. Davis
Lease Name Steckel Well No. 12
Office Address 402 Union National Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Abandoned Oil Well
Date well completed December 6, 1947 19
Application for plugging filed January 8, 1951 19
Application for plugging approved January 8, 1951 19
Plugging commenced January 10, 1951 19
Plugging completed January 16, 1951 19
Reason for abandonment of well or producing formation oil depleted and not profitable to operate as commercial well
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

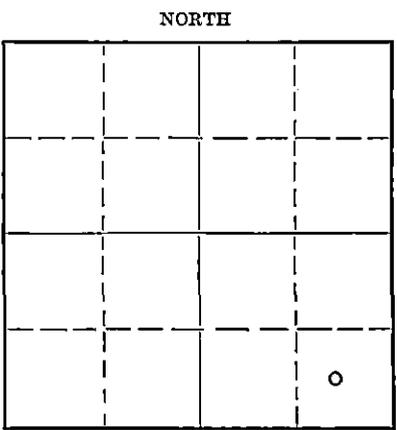

Locate well correctly on above Section Flat

Name of Conservation Agent who supervised plugging of this well G. D. Stough
Producing formation lime, siliceous Depth to top 3253 Bottom 3262 Total Depth of Well 3262 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10 3/4"	127'	
				7"	3092'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

127 feet of 10 3/4 inch surface pipe circulated with cement. 7 inch casing set at 3092 feet, cemented with 50 sacks cement. 86 feet of 4 1/2" Liner - Top 3253 feet. 5 1/2 feet of 5-1/2 inch Liner at 3175 feet. Set rock bridge and 6 sacks of cement at 3080 feet. Ripped off and pulled the 7 inch casing. Mud to 150 feet. Set rock bridge and 20 sacks of cement at 150 feet. Mud to 30 feet. Bridge and 10 sacks of cement at the surface. Bill Morgan, Plugging Contractor.

RECEIVED
STATE CORPORATION COMMISSION
JAN 24 1951
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Courtney B. Davis,
Address 402 Union National Bank Bldg.,
Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Courtney B. Davis (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) x Courtney B. Davis x
402-Union National Bank Bldg, Wichita-Kan.
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of January, 1951

My commission expires July 16, 1951 Notary Public.


PLUGGING
FILE SEC - LT 20 R11W
BOOK PAGE 53 LINE 45

Company - COURTNEY B. DAVIS, INC.
 Farm - Steckel No. 12

SEC. 1 T. 20 R. 11W
 CSE SE

Total Depth. 3261½
 Comm. 12-6-47 Comp. 12-23-47
 Shot or Treated. 3000 gals.
 Contractor. Sheffer Drlg. Co.
 Issued. 5-6-50

County. Barton
 KANSAS



CASING:
 10 3/4" 127' 5½" liner 3175'
 7" 3092' 4½" liner 3253'

Elevation. _____

Production. Pot. 35 bbls oil
 1200 water.

Figures Indicate Bottom of Formations.

- sand 90
- shale, shells 170
- redrock 215
- redbed 485
- anhyd. 500
- shale, shells 900
- shale 940
- shale, shells 1270
- lime little, shale 1305
- lime, shale 1500
- lime hrd 1520
- lime, shale 2360
- lime 2380
- lime, shale 2425
- lime spots, shale 2723
- lime 2724
- lime, shale 2745
- lime 2760
- lime, shale 2935
- shale 3000
- lime, shale K C. 3020
- lime little, shale 3040
- lime, shale 3065
- lime RTD 3092
- lime 3130
- Small show oil 3092-3115,
 Acid w/3000 gals, then made
 5 bbls oil, no water.
- shale 3136
- lime brkn 3144
- lime 3153
- lime brkn 3160
- lime 3202
- shale drk, Cave 3205
- lime 3253
- lime siliceous, 80' fluid
 1 hr, mostly water 3255
- filled 1400' fluid, mostly
 water, Pot. w/Reda pump
 35 bbls oil., 1200 bbls wtr.
- lime 3261½
- Total depth

PLUGGING
 FILE SEC 1 T 20 R 11W
 PAGE 53 LINE 45