

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD  
OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plugging  
off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission,  
800 Bittling Building,  
Wichita, Kansas

Rice County, Sec. 31 Twp. 18 - S. Rge. 6 (E) (W) est

Location as "NE1/4NW1/4SW1/4" or footage from lines SE. CORNER  
Lease Owner GLENNAC OIL CO & W.E. WITT  
Lease Name Sargent Well No. 1  
Office Address WICHITA, KAS.  
Character of Well (Completed as Oil, Gas or Dry Hole) DRY HOLE  
Date, well completed AUGUST 1st. 1936  
Application for plugging filed August 1st. 1936  
Application for plugging approved 1936  
Plugging Commenced August 3rd. 1936  
Plugging Completed August 12th. 1936  
Reason for abandonment of well or producing formation DRY HOLE

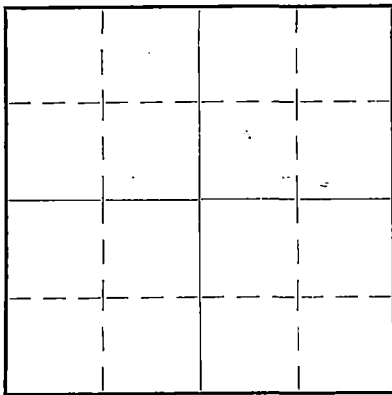

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 1936  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES


Name of Conservation Agent who supervised plugging of this well Raymond GEAR  
Producing formation 3466 Depth to top Bottom 3501 Total Depth of Well 3501 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand				20 "	40 Ft.	40 Ft.
RED ROCK				15 1/2	300 Ft.	300 Ft.
SALT				12 1/2	610 Ft.	610 Ft.
Shale				10	1609 Ft.	1609 Ft.
Line				8 1/4	2400 Ft.	2400 Ft.
lime				6 5/8	3000 Ft.	3000 Ft.
				5 3/16	3310 Ft.	3310 Ft.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from... feet to... feet for each plug set.  
Bottom of Hole 3501 Ft. Four Ft wood Plug driven at Bottom Mudded with thick mud ~~3000~~ to 3300 Ft. filled with dirt to 3050 Ft. Six Ft wood plug driven 3050 Ft. mudded back to 3000 Ft Small Plug driven, filled and plugged with mud and dirt back to - 100 Ft. then plugged with heavy wooden plug below water and above water and mudded thoroughly to top....

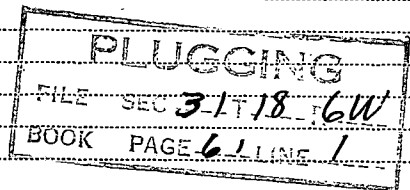

(If additional description is necessary use BACK of this sheet)

Correspondence regarding this well should be addressed to W.E. Witt  
Address 1115 Union Nat. Bank Bldg.

STATE OF Kansas, COUNTY OF Rice, ss.  
W.E. Witt (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *W.E. Witt*

(Address)

SUBSCRIBED AND SWORN to before me this 8th day of Sept. 1936.

My commission expires June 22-1940. *William H. Thurman*  
Notary Public.

W. E. WITT SARGENT #1 -  
S $\frac{1}{2}$  SE $\frac{1}{4}$  Sec. 31-18-6.

Casing Record:	Soil	0	8	
	Sand	8	30	1 b. W 30-65
15 $\frac{1}{8}$ ---	Black shale	30	65	
12 $\frac{1}{8}$ ---	Red rock	65	87	
10---	Sandy lime	87	102	
6---	White shale	102	107	
5---	Red rock	107	117	
	Black shale	117	123	
	Redrock	123	365	
	Black shale	365	370	
	Broken lime	370	385	
	Black shale	385	390	
	Brown shale	390	440	
	Red rock	440	450	
	Gray shale	450	465	
	Black shale	465	490	
	Blue shale	490	500	
	Broken lime	500	505	
	Gray shale	505	595	
	Brown shale	595	600	
	Salt	600	865	
	Blue shale	865	870	
	Broken lime	870	879	
	Blue shale	879	887	
	Lime	887	890	
	Brown shale	890	898	2 b.W 898-906
	Broken lime	898	906	
	Blue shale	906	910	
	Lime	910	915	
	Sandy lime	915	920	
	Brown lime	920	925	
	Hardlime	925	930	
	White shale	930	945	
	Broken lime	945	955	
	Lime	955	965	
	Broken lime	965	970	
	White shale	970	980	
	Sandy shale	980	990	
	Shale & lime shells	990	1035	
	Shale	1035	1060	
	Red rock	1060	1068	
	Shale & lime shells	1068	1075	
	White shale	1075	1090	
	Sandy shale	1090	1100	
	Sandy shale	1100	1115	
	Brown shale	1115	1125	
	Red rock	1125	1140	
	Lime	1140	1145	
	Sandy lime	1145	1155	
	Broken lime	1155	1160	
	Brown shale	1160	1225	
	Sandy lime	1225	1260	
	Slate	1260	1275	
	Red rock	1275	1280	
	Hard lime	1280	1290	
	Black shale	1290	1360	
	Sandy lime	1360	1368	
	Red rock	1368	1370	
	Slate	1370	1380	
	Lime	1380	1385	
	Brown shale	1385	1400	
	Red rock	1400	1405	
	Lime	1405	1420	
	Shale	1420	1430	
	Red rock	1430	1450	
	White shale	1450	1480	

**PLUGGING**  
 FILE SEC 31-18-6W  
 BOOK PAGE 61 LINE 1

Blue slate	1480	1500
Broken lime	1500	1515
Dark shale	1515	1525
Lime	1525	1540
Shale	1540	1550
Broken lime	1550	1560
Sandy shale	1560	1570
Blue shale	1570	1577
Lime	1577	1582
Shale	1582	1590
Lime	1590	1635
Shale	1635	1645
Lime	1645	1655
Shale	1655	1740
Lime	1740	1755
Shale	1755	1840
Red rock	1840	1850
Lime	1850	1858
Dark shale	1858	1905
Lime	1905	1920
Shale	1920	1950
Sand	1950	1960
Shale	1960	1975
Lime	1975	1990
Shale	1990	2010
Lime	2010	2035
Shale	2035	2045
Lime	2045	2050
Red rock	2050	2057
Lime	2057	2065
Shale	2065	2100
Sandy shale	2100	2130
Lime	2130	2140
Sand, water	2140	2144
Lime	2144	2160
Shale	2160	2180
Lime	2180	2190
Shale	2190	2200
Lime	2200	2205
Shale	2205	2215
Sand	2215	2240
Sandy lime	2240	2300
Shale	2300	2308
Lime	2308	2330
Shale	2330	2380
Lime	2380	2490
Sand	2490	2495
Lime	2495	2515
Shale	2515	2525
Lime	2525	2530
Shale	2530	2545
Lime	2545	2553
Sandy lime	2553	2590
Sand	2590	2610
Brown slate	2610	2612
Sand	2612	2616
Shale	2616	2625
Lime	2625	2640
Blue slate	2640	2670
Sandy slate	2670	2700
Red rock	2700	2705
Sandy lime	2705	2800
Lime	2800	2810
Water sand	2810	2815
Lime	2815	2870
Black shale	2870	2885
Shaly lime	2885	2900
Sandy lime	2900	2910

5 B.W- 2140-44

2 B.W

5 B.W

5 B. W

PLUGGING  
 FILE SEC 3118 R6W  
 BOOK PAGE 61 LINE 1

Sandy lime	2910	2913	
White shale	2913	2917	
Lime	2917	2960	
Brown shale	2960	2978	
Limestone	2978	2990	
Shale	2990	2995	
Lime	2995	3034	
Shale	3034	3036	
Lime	3036	3042	
Shale	3042	3047	
Lime, sand & shells	3047	3055	oil from 3028-3038
Lime	3055	3065	
Variegated shale	3065	3075	
Shale & shells	3075	3125	
Lime & shelly shale	3125	3150	
Red rock	3150	3172	
Brown shale, shells	3172	3182	
Pink rock, sdy. lime	3182	3192	
Blue shale	3192	3202	
Green shale	3202	3255	
Sand	3255	3272	10 B.
Sandy lime	3272	3304	oil, water 3272
Sand	3304	3310	
Lime	3310	3318	Set 5"
Dark sand	3318	3324	
Lime	3324	3337	
Sand	3337	3345	
Shale	3345	3347	
Sand	3347	3370	
Lime	3370	3407	
Sandy lime	3407	3418	
Sandy lime	3418	3426	
Sand	3426	3442	
Sandy lime	3442	3458	
Shale break	3458	3460	
Sandy lime	3460	3466	(Top siliceous lime
Siliceous lime	3466	3475	3466)
Siliceous lime	3475	3483	(water from 3479 to
Siliceous lime	3483	3501	3482)
			(water 3485 to 3487)
			(bottom <del>3487</del> 3501)

**PLUGGING**  
 FILE SEC-31T18 RBW  
 BOOK PAGE-61 LINE-1

I hereby certify that the above is a true and correct copy of the formations penetrated and drilled on the location herein-  
above described.

*W. E. Witt*

State of Kansas )  
                          ) SS.  
County of Sedgwick)

24th day of July, 1936. Subscribed and sworn to before me this

*Lillian N. Thurman*  
Notary Public

My commission expires June 22, 1940.