

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Rice County, Sec. 28 Twp. 19 Rge. (E) 10 (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE SE SE

Lease Owner E. H. Adair & R. C. Fleming

Lease Name Manke Well No. 1

Office Address 407 W-K-H Building, Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed Sept. 14, 19 48

Application for plugging filed Nov. 16, 19 52

Application for plugging approved Nov. 17, 19 52

Plugging commenced Nov. 17, 19 52

Plugging completed Nov. 24, 19 52

Reason for abandonment of well or producing formation Operating cost in excess of income.

If a producing well is abandoned, date of last production Nov. 17, 19 52

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well O. D. Stough

Producing formation Arbuckle Depth to top Bottom Total Depth of Well 3282 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
	Copy of well log attached.			4 1/2"	3282'	aprox. 500'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

filled hole with mud to 200', put in rock bridge, dumped 25sx cement, filled to 20' of surface, dumped 5 sx of cement, filled to surface.

RECEIVED
STATE CORPORATION COMMISSION
JAN 2 - 1953
CONSERVATION DIVISION
Wichita, Kansas
1-2-1953

Name of Plugging Contractor E. H. Adair Oil Company
Address Wichita 2, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
Russell I. Baker (employee of owner) or (owner or operator) of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Russell I. Baker

Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 25th day of November 19 52

My commission expires September 15, 1953 Notary Public.

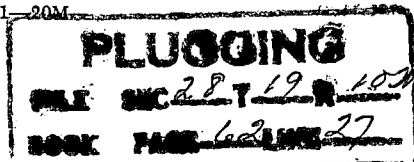


WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

Company - E. H. ADAIR OIL COMPANY
Farm - Manke No. 1

SEC. 28 T. 19 R. 10W
SE SE SE

Total Depth. 3282'
Comm. 9-3-48 Comp. 9-14-48
Shot or Treated.
Contractor. Company Tools
Issued. 1-8-49

County. Rice KANSAS



CASING:
8" Sur. . 162' cem w/160 sx., recem. w/35 sx.
5" 3253'
4 1/2" 3282' cem w/125 sx.

Elevation. _____

Production. 300 BO

Figures Indicate Bottom of Formations.

surface	5
sand	85
lime brn.	110
shale	165
shale sdy	526
shale sdy	1215
shells, shale	1440
lime	1510
shale	1518
shale, shells	1610
lime	1757
lime, shale	1980
shale	2658
lime	2923
shale	2965
lime	3282
total depth	

Halliburton line 3178'
Hole OK.

Tons:

Lansing:
2965-2969, Gy, Brn Xlyn limestone.
2969-2975, Gy xlyn limestone, trace chert.
2975-3004, gy xlyn limestone.
3004-3012, gy, buff, xlyn, fossiliferous limestone.
3012-3031, gy, buff xlyn limestone.
3031-3034, gy shale.
3034-3044, gy xlyn limestone.
3044-3074, gy porous, oolitic limestone. Trace light staining. Weak odor.
3074-3137, gy, buff xlyn limestone.
3137-3156, gy xlyn limestone, shale brks.
3156-3170, gy, buff xlyn limestone.
3170-3190, gy, buff xlyn limestone, and shale brks.
3190-3246, gy, buff xlyn limestone.
3246-3248, gy shale.
3248-3252, gy shale, limestone shells.

ARBUCKLE:
3252-3260, gy, finely xlyn & dense dolo. no porosity, or staining, weak odor.
3260-3282, gy, tan, medium to coarse. xlyn dolomite. Porous in part. Trace of spotty staining. Light odor.
DST 3261-3282. 1700' fluid in 15 min. Part water.
4 1/2" casing cemented on bottom to perforate.
Circ. 1 1/2 hrs. @ 3051'.
Circ. 1 1/2 hrs. @ 3251'.
Circ. 1 1/2 hrs. @ 3256'.
Circ. 1 1/2 hrs. @ 3262'.
Circ. 1 1/2 hrs. @ 3271'.
Circ. 1 hr. @ 3282'.

STATE CONSERVATION COMMISSION
JAN 2 - 1953
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
SEC 28 T 19 R 10W
BOOK PAGE 62 LINE 27