


DISTRICT CONSERVATION AGENT'S REPORT

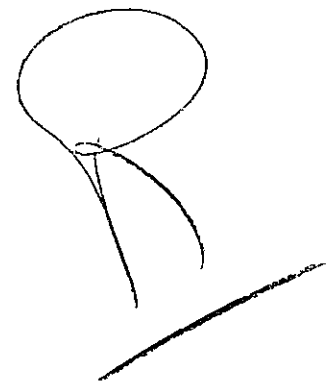

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 26-44

LOCATION C. No. 8 W

SEC. 10 TWP. 30 RGE. 11-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well X Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 2 Lease C. Morris

Operator Standard Oil & Gen Co Address Box #9 - Ellinwood - Kans.

Field \_\_\_\_\_ County Barton

Total Depth 330 1/2 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 13 3/4 - 199 ft. Circulated with cement.  
5" casing at 3299 ft. Cemented with 150 sacks of cement.  
Plugged back to 3300 ft with shot - Dumped 6 sacks of  
cement at 3290 ft - 15" shot & pulled the 6" casing -  
filled with mud to 200 ft - Well flowing a little water  
Pumped in Plug & 140 sacks of cement - Filling  
hole to the surface with cement - Halliburton  
Pipe Reeling, Inc. Plugging Contractors

RECEIVED

STATE CORPORATION COMMISSION

PLUGGING

FILE SEC. 10 TWP. 30 R. 11  
BOOK PAGE 26 LINE 44

SEP 29 1950 9-29-50

CONSERVATION DIVISION District Conservation Agent

Wichita, Kansas

Date 9-27-50

*C. H. Joseph*