

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR


FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Blitting Building  
Wichita, Kansas

Rice County. Sec. 17 Twp. 20S Rge. (E) 10 (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NE  
Lease Owner Howard D. Brunson  
Lease Name Poncin Well No. 1  
Office Address 421 N. Delrose, Wichita, Kansas.  
Character of Well (completed as Oil, Gas or Dry Hole) dry  
Date, well completed May 31, 1941  
Application for plugging filed May 30, 1941  
Application for plugging approved " 19  
Plugging Commenced " 31 1941  
Plugging Completed June 1, 1941  
Reason for abandonment of well or producing formation Dry.  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes.

NORTH

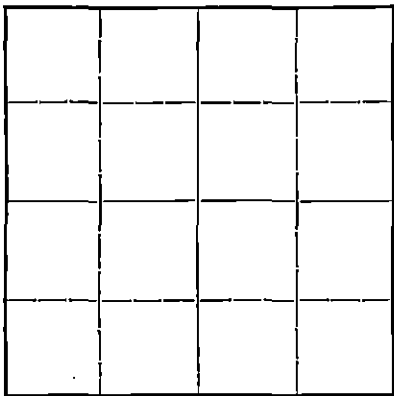

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well  
Producing formation Depth to top Bottom Total Depth of Well 3358-61 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| Formation     | Content | From | To | Size | Put In | Pulled Out |
|---------------|---------|------|----|------|--------|------------|
| See Well Log. |         |      |    |      |        |            |
|               |         |      |    |      |        |            |
|               |         |      |    |      |        |            |
|               |         |      |    |      |        |            |
|               |         |      |    |      |        |            |
|               |         |      |    |      |        |            |
|               |         |      |    |      |        |            |
|               |         |      |    |      |        |            |
|               |         |      |    |      |        |            |
|               |         |      |    |      |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

4 sacks cement at 3361  
Mudded to 200 feet from top  
20 sacks dumped on bridge at 200 feet  
Mudded to top, capped with 15 sacks of cement

FIL 17 20 10W  
ENOK 140 45


(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Howard D. Brunson,  
Address 421 N. Delrose, Wichita, Kansas.

STATE OF \_\_\_\_\_, COUNTY OF \_\_\_\_\_, ss.

(employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Howard D. Brunson*



(Address) \_\_\_\_\_, 1941

SUBSCRIBED AND SWORN to before me this 28th day of July, 1941

*M. Irene Black*  
Notary Public.


My commission expires January 13, 1945



Howard Brunson Company  
Poncin #1

SEC. 17 T. 20 R. 10  
N.E. 1/4 of S.W. Corner  
Rice County, Kansas

Total Depth. 3361'  
Comm. 4-23-41  
Contractor. Howard Brunson Company  
Completed 5-31-41



CASING:  
13 1/2" 465'  
10" 1720'  
8 1/4" 2130'  
6 5/8" 3077'

|             |                     |             |                            |
|-------------|---------------------|-------------|----------------------------|
| 0 - 60      | Sand                | 2085 - 2100 | Lime                       |
| 60 - 65     | Blue Shale          | 2100 - 2115 | Shale                      |
| 65 - 190    | Shale               | 2115 - 2125 | Lime                       |
| 190 - 450   | Red Rock            | 2125 - 2175 | Shale                      |
| 450 - 470   | Lime                | 2175 - 2180 | Lime                       |
| 470 - 740   | Red Rock            | 2180 - 2195 | Shale                      |
| 740 - 820   | Gray Shale          | 2195 - 2220 | Lime                       |
| 820 - 850   | Shale               | 2220 - 2230 | Red Rock                   |
| 830 - 845   | Red Rock            | 2230 - 2260 | Lime                       |
| 845 - 880   | Shale               | 2260 - 2275 | Shale                      |
| 880 - 965   | Blue Shale          | 2275 - 2278 | Lime                       |
| 965 - 1280  | Salt                | 2278 - 2325 | Shale                      |
| 1280 - 1310 | Lime                | 2325 - 2350 | Lime                       |
| 1310 - 1315 | Shale               | 2350 - 2387 | Sandy Shale                |
| 1315 - 1325 | Lime                | 2387 - 2400 | Lime                       |
| 1325 - 1330 | Shale               | 2400 - 2405 | Shale                      |
| 1330 - 1345 | Lime                | 2405 - 2420 | Lime                       |
| 1345 - 1355 | Gray Shale          | 2420 - 2425 | Shale                      |
| 1355 - 1365 | Lime                | 2425 - 2430 | Lime                       |
| 1365 - 1375 | Shale               | 2430 - 2435 | Shale                      |
| 1375 - 1380 | Lime                | 2435 - 2445 | Lime                       |
| 1380 - 1390 | Shale               | 2445 - 2470 | Shale                      |
| 1390 - 1400 | Lime                | 2470 - 2485 | Lime                       |
| 1400 - 1410 | Shale               | 2485 - 2545 | Shale (1BW 2510-25)        |
| 1410 - 1420 | Lime                | 2545 - 2570 | Lime                       |
| 1420 - 1440 | Shale & Shells      | 2570 - 2575 | Shale                      |
| 1440 - 1455 | Broken Lime         | 2575 - 2600 | Lime                       |
| 1455 - 1500 | Shale               | 2600 - 2640 | Shale (1 1/2 BW 2630-40)   |
| 1500 - 1540 | Lime                | 2640 - 2845 | Lime (2 BW 2825)           |
| 1540 - 1555 | Gray Shale          | 2845 - 2850 | Shale                      |
| 1555 - 1565 | Red Rock            | 2850 - 2910 | Lime (2 1/2 BW 2883-93)    |
| 1565 - 1600 | Lime                | 2910 - 2915 | Shale                      |
| 1600 - 1605 | Shale               | 2915 - 2925 | Lime                       |
| 1605 - 1712 | Lime -(1BW 1605-10) | 2925 - 2935 | Shale                      |
| 1712 - 1715 | Shale               | 2935 - 2945 | Lime                       |
| 1715 - 1720 | Red Rock            | 2945 - 2950 | Red Rock                   |
| 1720 - 1745 | Lime                | 2950 - 2960 | Shale                      |
| 1745 - 1755 | Red Shale           | 2960 - 2965 | Lime                       |
| 1755 - 1780 | Lime                | 2965 - 2980 | Shale                      |
| 1780 - 1785 | Shale               | 2980 - 2985 | Lime                       |
| 1785 - 1800 | Lime                | 2985 - 3035 | Shale                      |
| 1800 - 1805 | Red Rock            | 3035 - 3045 | Lime                       |
| 1805 - 1815 | Lime                | 3045 - 3055 | Shale                      |
| 1815 - 1820 | Shale               | 3055 - 3085 | Lime                       |
| 1820 - 1825 | Lime                | 3085 - 3090 | Hard Lime                  |
| 1825 - 1830 | Red Rock            | 3090 - 3115 | Lime                       |
| 1830 - 1840 | Lime                | 3115 - 3118 | Shale                      |
| 1840 - 1850 | Gray Shale          | 3118 - 3153 | Lime (Sm. sho oil 3145-50) |
| 1850 - 1860 | Red Rock            | 3153 - 3165 | Shale                      |
| 1860 - 1870 | Lime                | 3165 - 3190 | Lime                       |
| 1870 - 1875 | Shale               | 3190 - 3200 | Broken Lime                |
| 1875 - 1930 | Lime (1/2 BW 1925)  | 3200 - 3220 | Lime                       |
| 1930 - 1940 | Red Rock            | 3220 - 3225 | Broken Lime                |
| 1940 - 1990 | Lime                | 3225 - 3265 | Lime                       |
| 1990 - 2000 | Blue Shale          | 3265 - 3270 | Shale                      |
| 2000 - 2015 | Lime                | 3270 - 3325 | Lime                       |
| 2015 - 2030 | Shale               | 3325 - 3329 | Shale                      |
| 2030 - 2050 | Lime (6BW 2040-50)  | 3329 - 3345 | Cong.                      |
| 2050 - 2070 | Lime                | 3345 - 3361 | Sand (3 BW 3345- 3358)     |
| 2070 - 2075 | Shale               |             | Top of Arbuckle            |
| 2075 - 2085 | Lime                |             | T.D. Abandoned             |

17 20 1014  
140 43

JUL 29 1941  
STATE CORP. COMM.  
GENERAL OFF.