

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plugging  
off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Stafford

County. Sec. 13 Twp. 22 Rge. (E) 13 (W)

Location as "NE1/4NW1/4SW1/4" or footage from lines NE, NE, SW.

Lease Owner Sunray Oil Company

Lease Name K. Teichmann Well No. 1

Office Address Philtower Bldg. Tulsa, Okla.

Character of Well (Completed as Oil, Gas or Dry Hole) Oil

Date, well completed July 23, 1938

Application for plugging filed May 22, 1939

Application for plugging approved 1939

Plugging Commenced May 24, 1939

Plugging Completed May 28, 1939

Reason for abandonment of well or producing formation insufficient production

If a producing well is abandoned, date of last production April 27, 1939

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Guy Wiershing

Producing formation Arbuckle Lime Depth to top 3694' Bottom 3698' Total Depth of Well 3698' Feet.

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
Sand	water	0	242'	10 1/2"	242'	2758' Sr.
K.C. Lime	show of oil & Water	3486	3482			0
Arbuckle	Oil	3694	3698	6"OD	3694' 125	Sr. 1943'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Arbuckle plugging record filed with plugging application

Heavy mud from 3502' to 3474'  
Bridge & Cement 3474' to 3444' Dumped w/ bailer  
Heavy mud 3444' to 250'  
Bridge & Cement 250' to 235' " " "  
Heavy mud 235' to 10' from base of cellar  
Cement Plug 10' to Base of Cellar

6-2-39

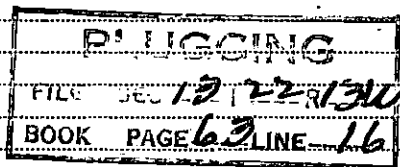

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to E.P. Heath

Address Hesston, Kans.

STATE OF KANSAS, COUNTY OF HARVEY, SS.

E.P. Heath (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

[Address]

SUBSCRIBED AND SWORN to before me this 2nd day of June, 1939

My commission expires July 8-1940

## Sunray Oil Company

K. Teichmann No. 1  
Sec. 13 - 22 - 13W

Sand	0 to 242'
Red Bed	485
" " & Shells	720
Anhydrite	760
Red Rock	805
Shale & Shells	830
Red Bed	890
Shale & Shells	1400
Sandy Lime	1475
Shale	1590
Lime	1700
Broken Lime	1800
Lime	1950
Sandy Lime	2060
Lime	2110
Broken Lime	2906
Lime	2951
Broken Lime	3022
Lime	3045
Shale & lime	3100
" "	3220
Lime	3240
Shale & Shells	3315
Shale	3366
Lime	3502
Lime & Shale	3528
Lime	3612
Chert & Sd. Lime	3643
Green Shale	3685
Blue "	3693
Sd. Lime & Shale	3694
Siliceous Lime	3698

Oil

Plugged back from 3698' to 3502' with cement dumped  
Perforated with Lane Wells 3466 to 3490' in KC Lime  
Shot with 10 qts. Nitro. 3474' to 3484 (no showing)

Top KC Lime	3355'
" Conglomerate	3605
" Viola Lime	3620
" Simpson	3643
" Siliceous	3694

242' 10 $\frac{3}{4}$ " Spiral Slip Collar Casing 275 sx. Cement  
3624' 6" OD 125 " "

PLUGGING  
FILE SEC. 13-22-13W  
BOOK PAGE 63 LINE 16

