

BOREHOLE COMPENSATED SONIC ARRAY LOG

Fold here

LOGGING DATA


GENERAL				GAMMA		ACOUSTIC			DENSITY			NEUTRON				
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix		
No.	From	To	ft/min	L	R	L	R		L	R		L	R			
ONE	4928	1742	REC	0	150											
DIRECTIONAL INFORMATION																
Maximum Deviation								@	KOP							@
Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5-INCH CASING																
CHLORIDES REPORTED AT 4,100 PPM																
LCM REPORTED AT 1 LB/BBL																
GTET-DSNT-SDLT-BSAT-ACRT RUN IN COMBINATION																
TODAY'S CREW; F. VILLA & M. GRAHAM																
THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES LIBERAL, KS. 620-624-8123																
HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.																
HALLIBURTON																



HALLIBURTON



Plot Time: 20-Aug-14 18:58:06
 Plot Range: 1730 ft to 4929.75 ft
 Data: LENA_MAI_3-29\Well Based\CASING\
 Plot File: \\BSAT\BSAT 5 MAIN LIB


Page 1 of 1

5 INCH MAIN LOG

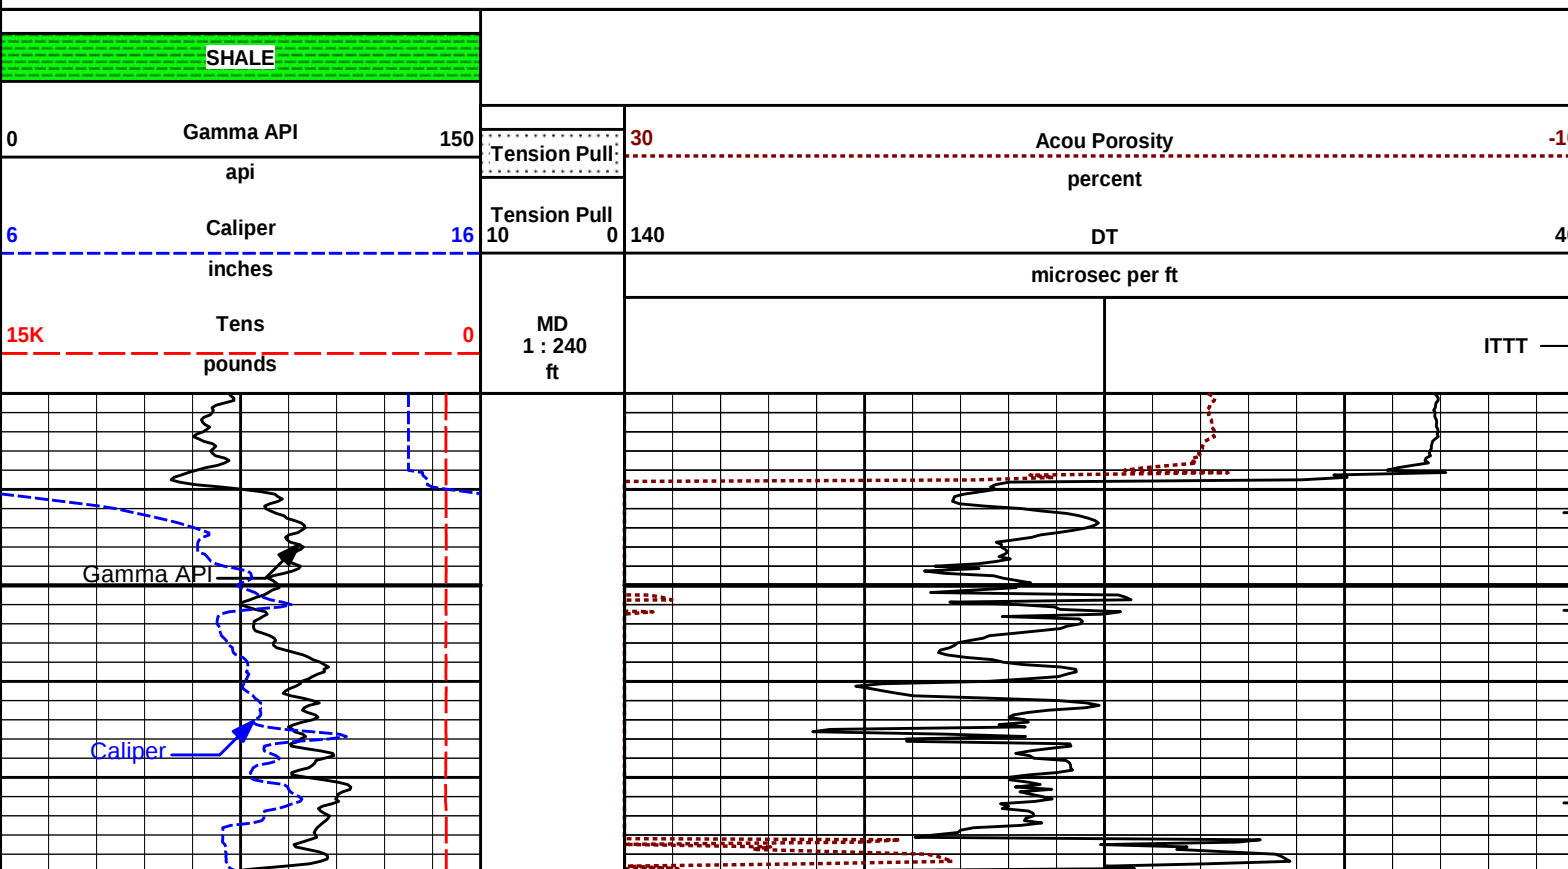

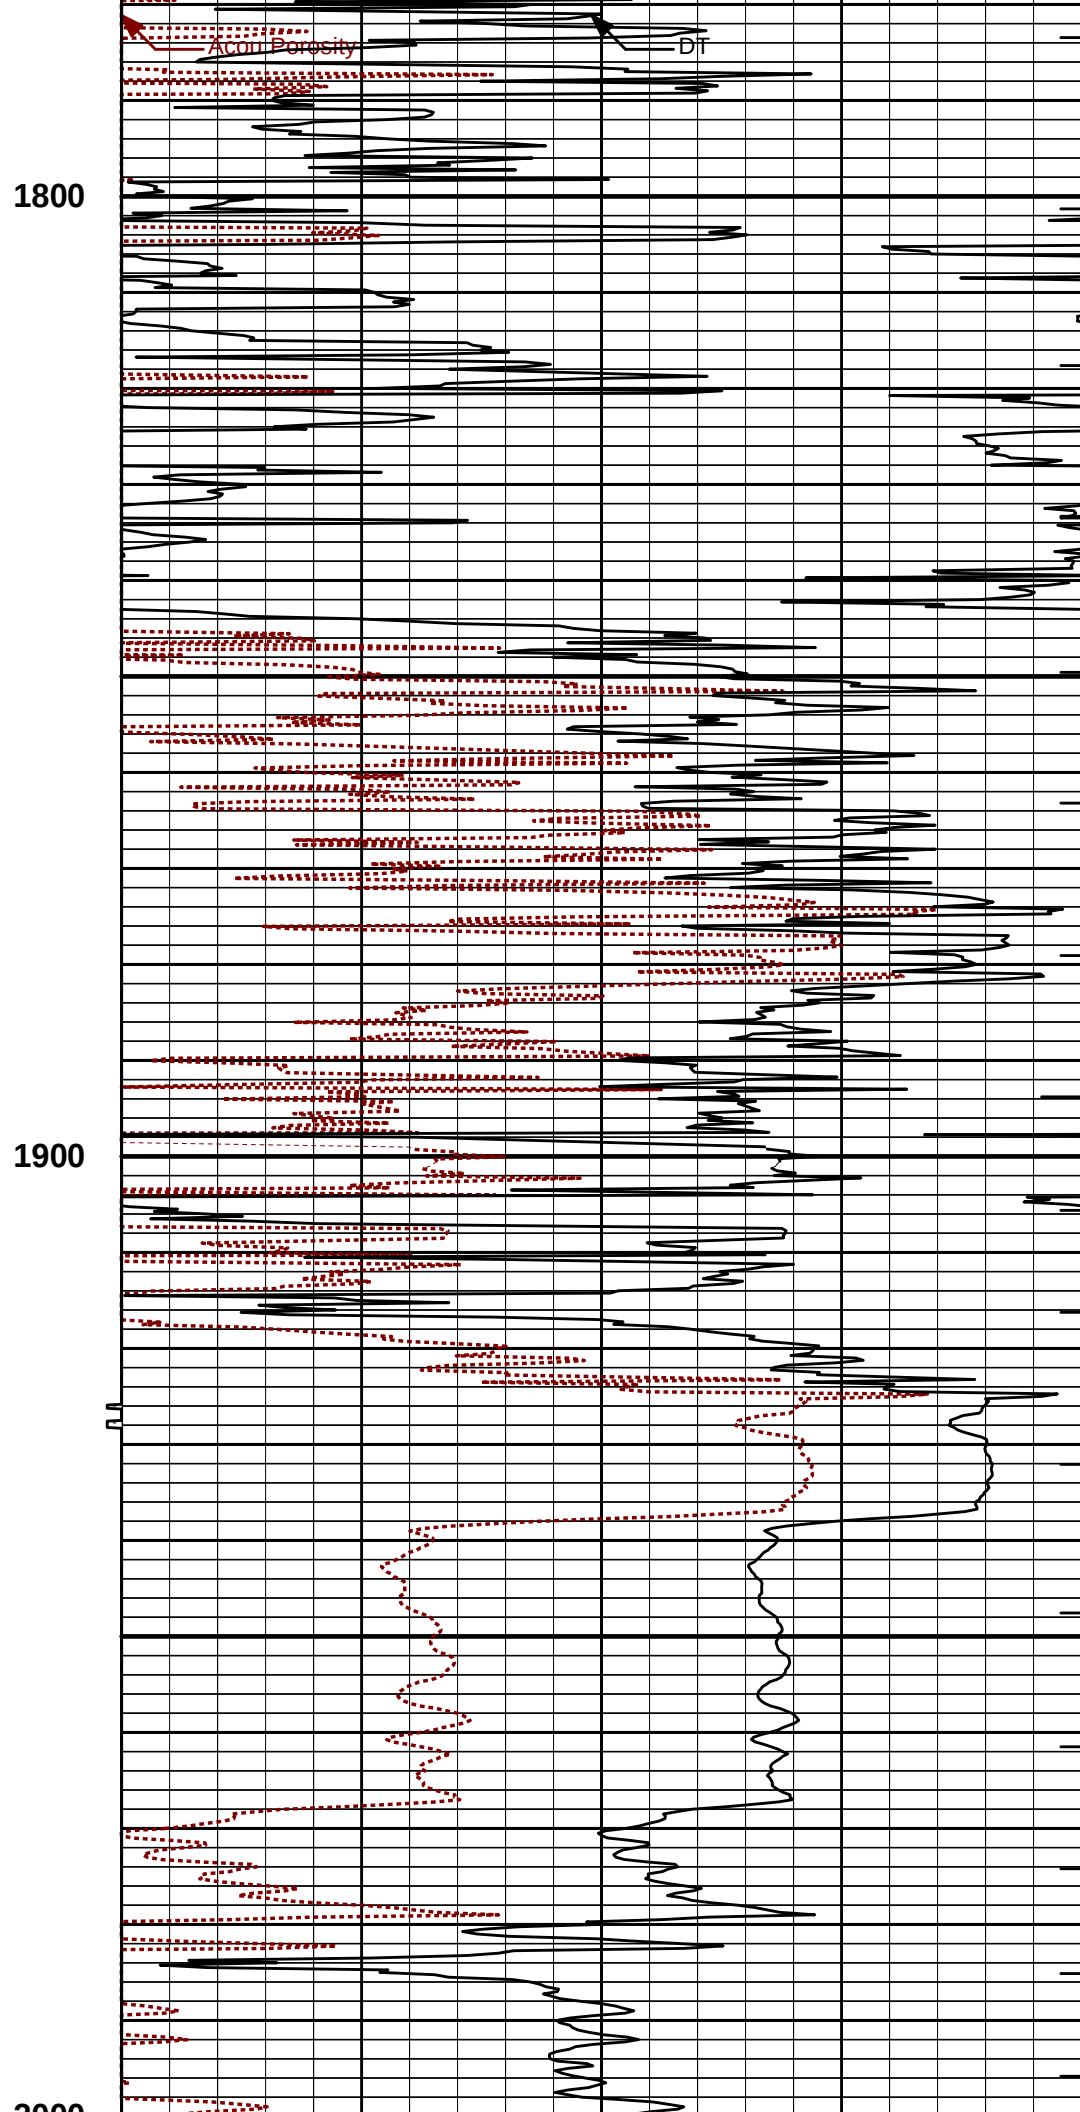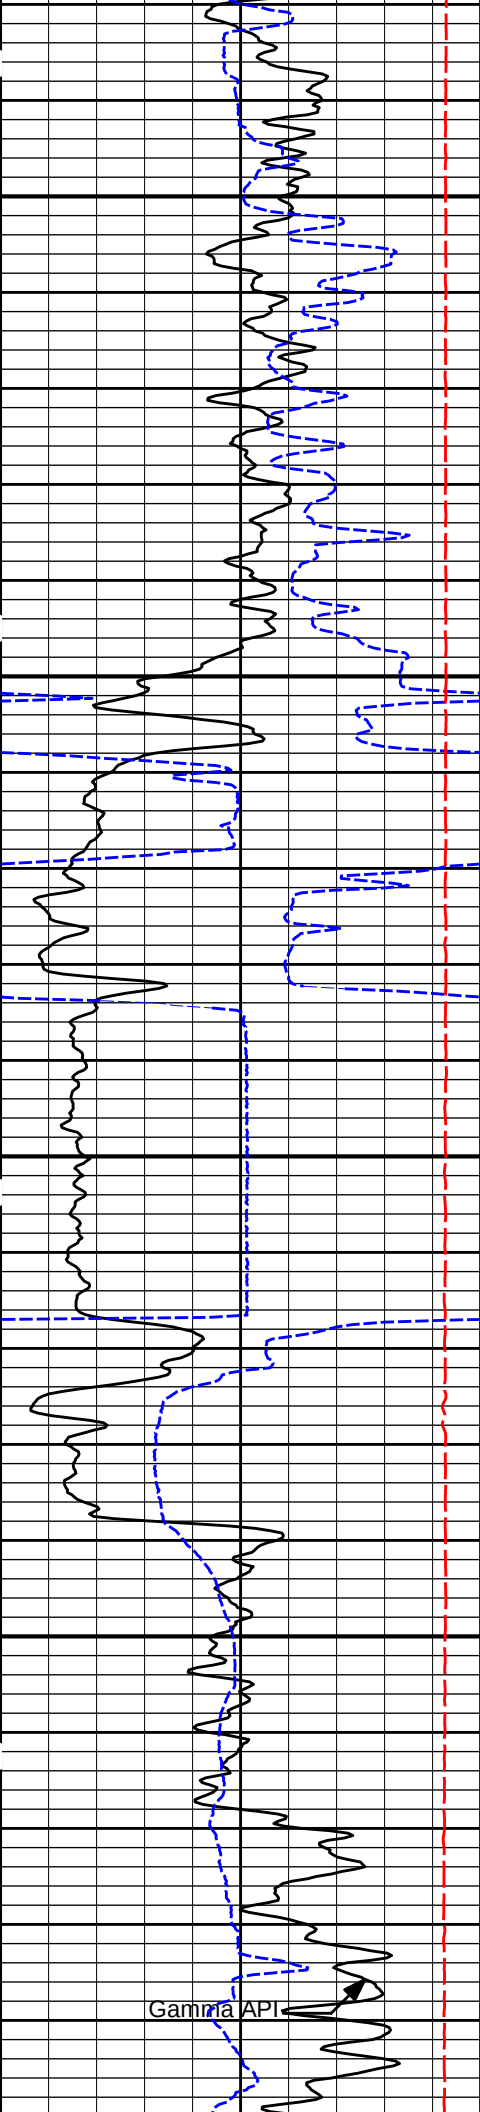


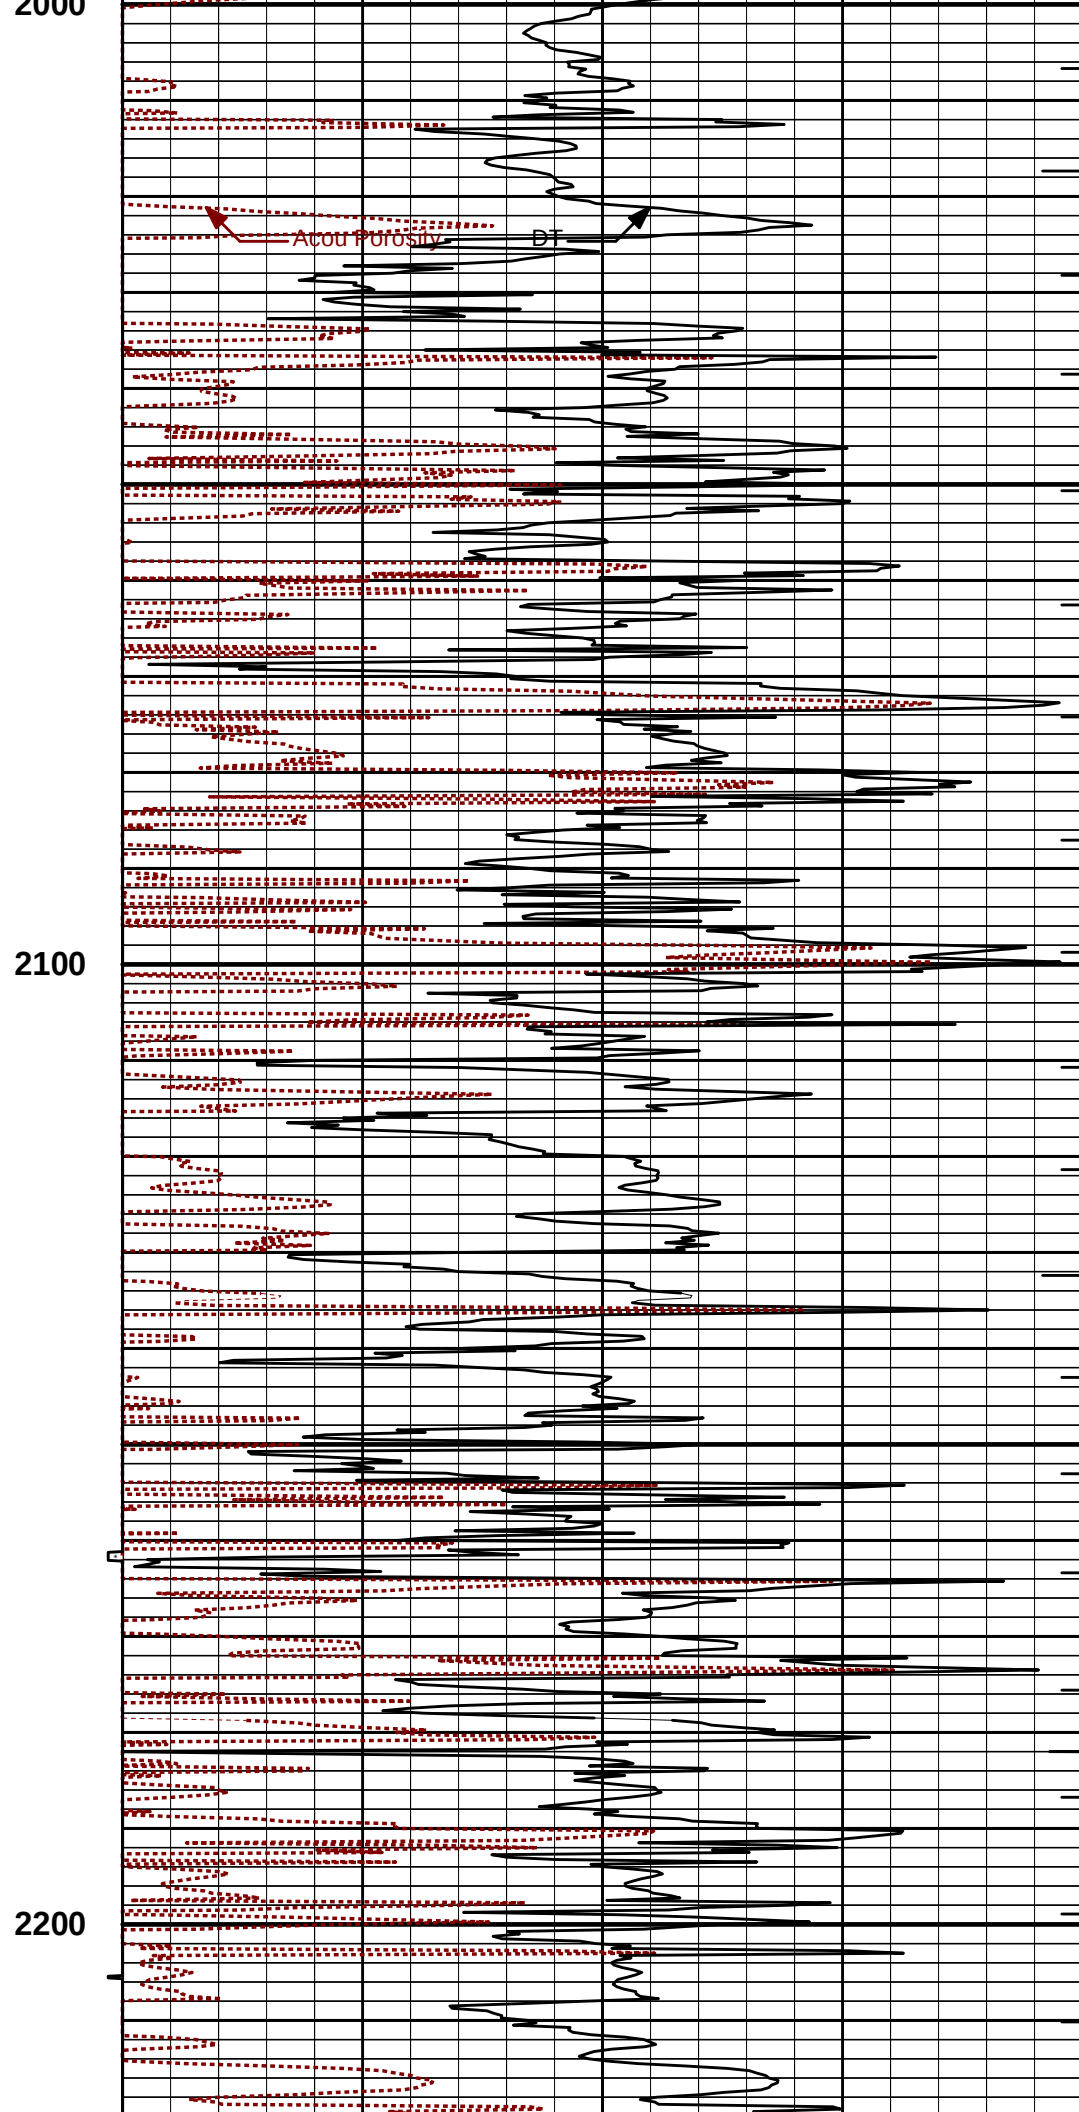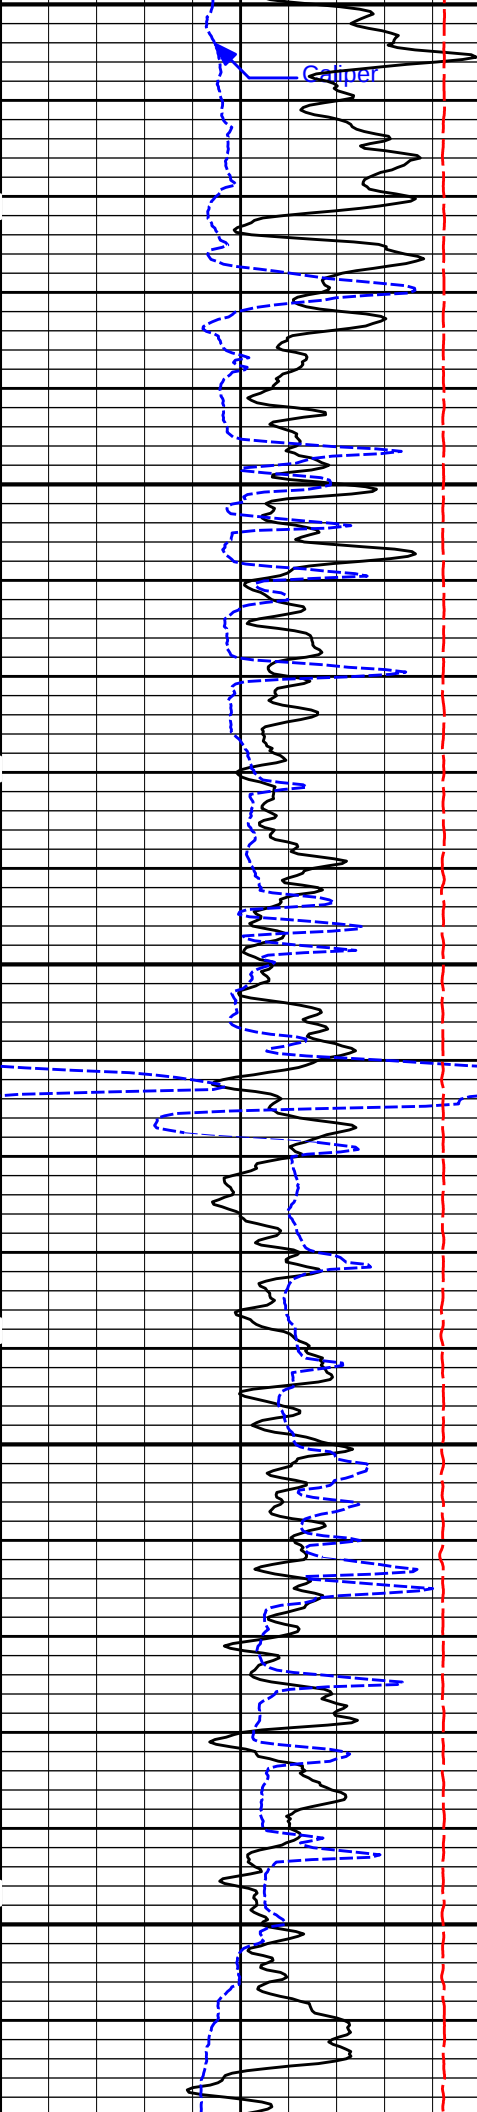


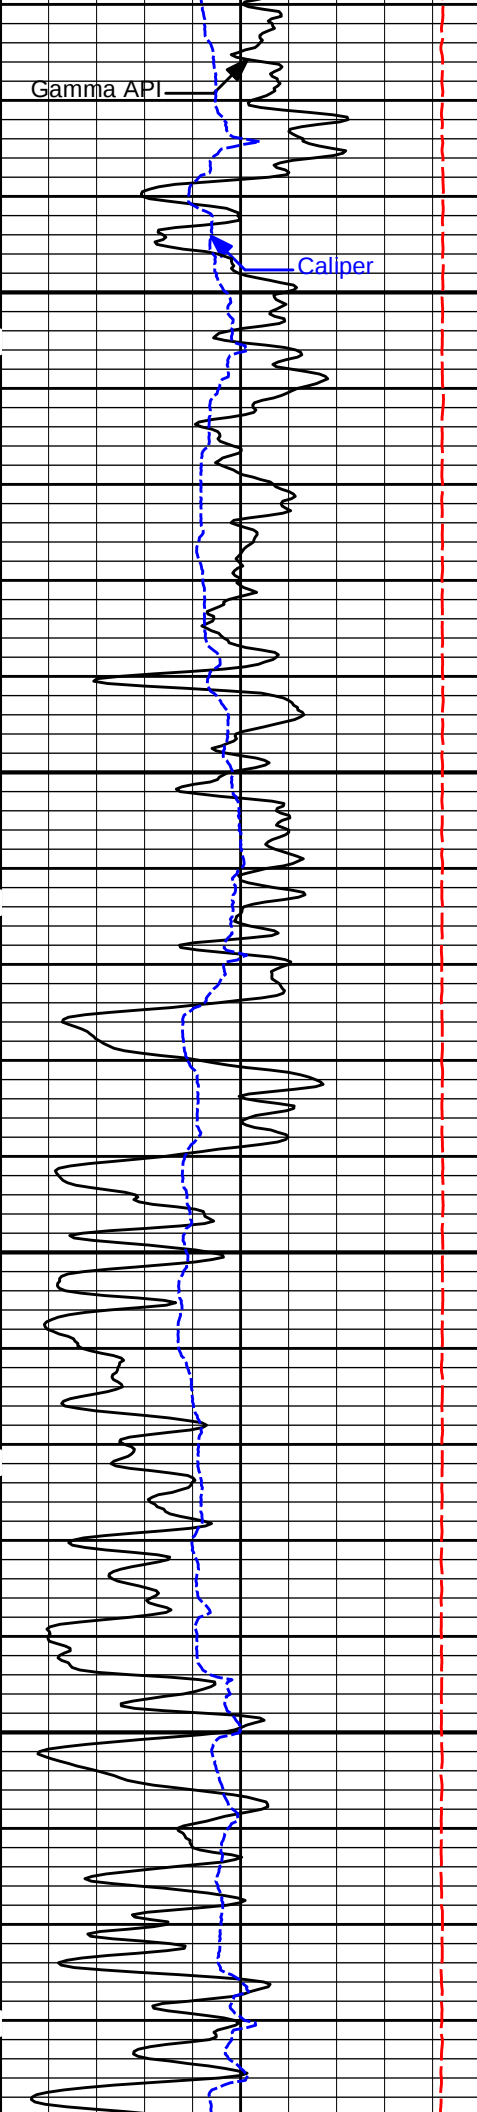

2300


2400

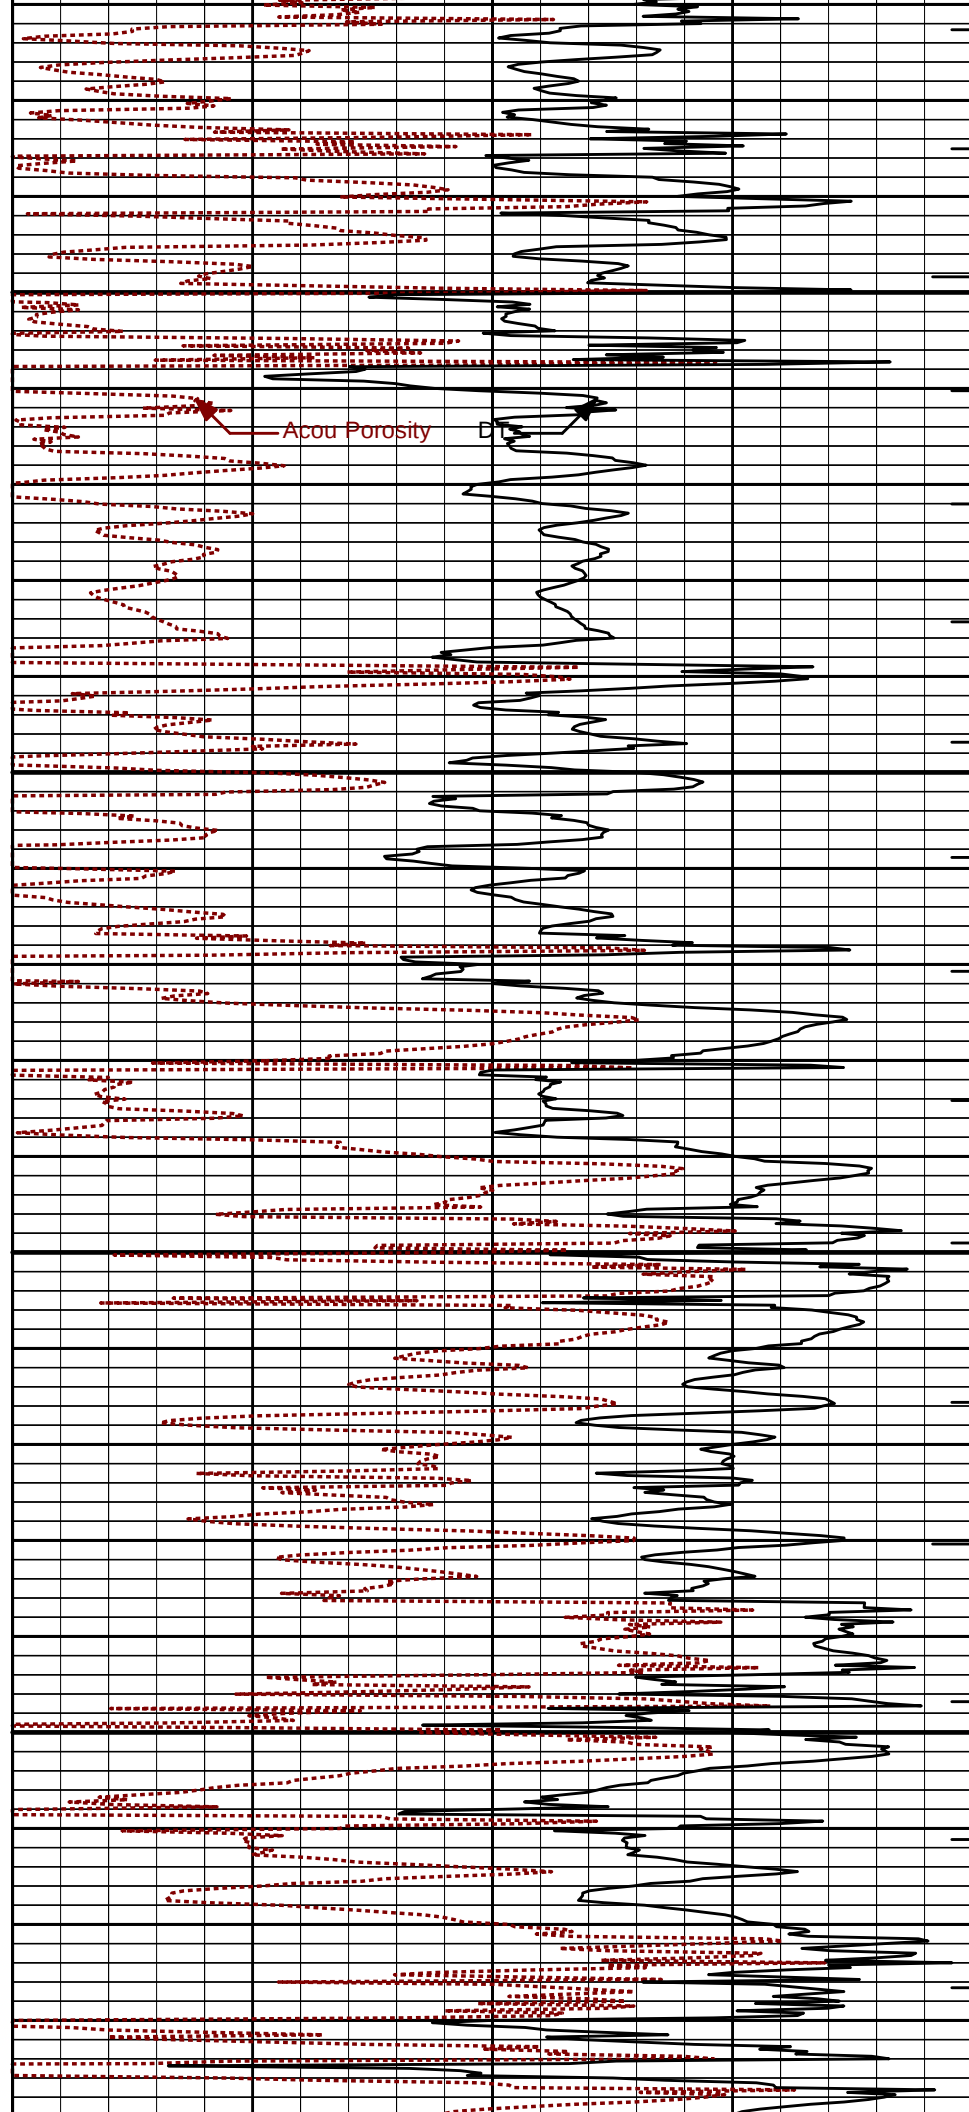

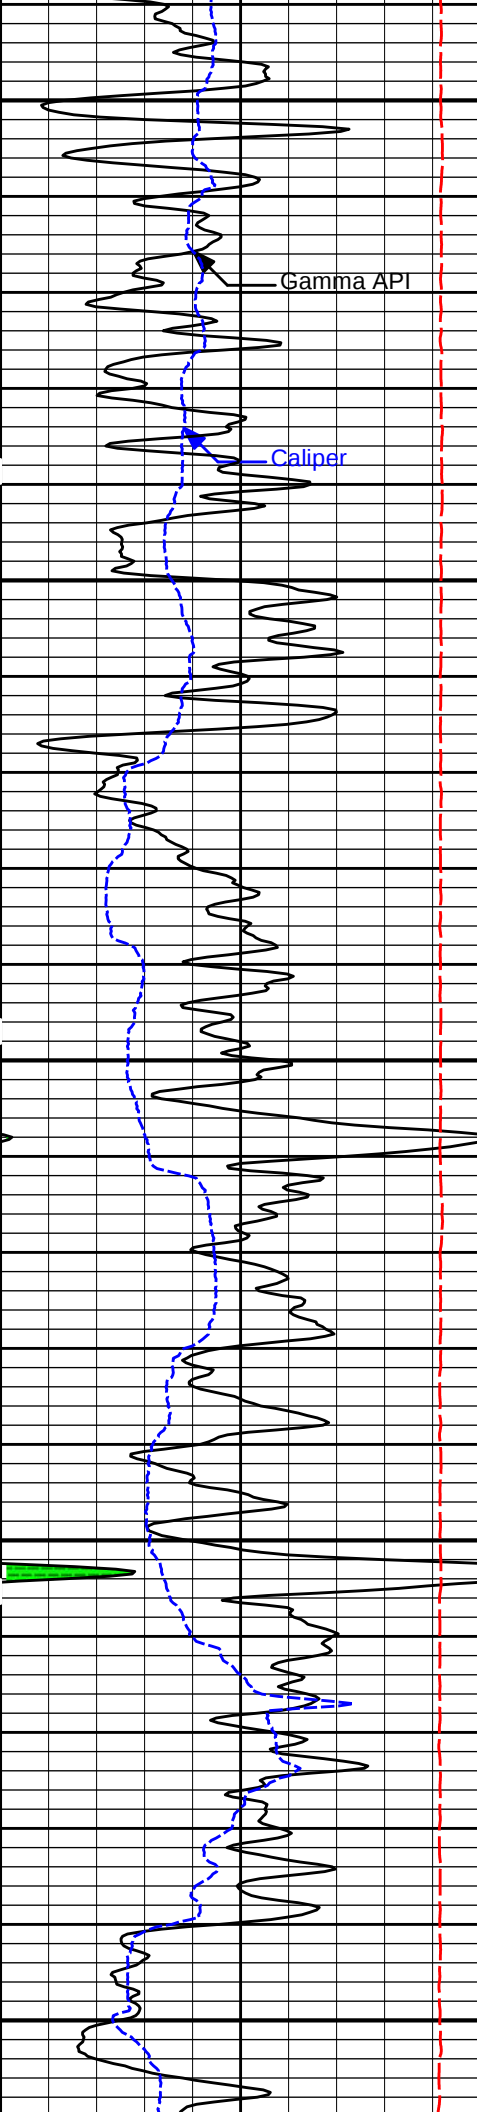

2500

2600

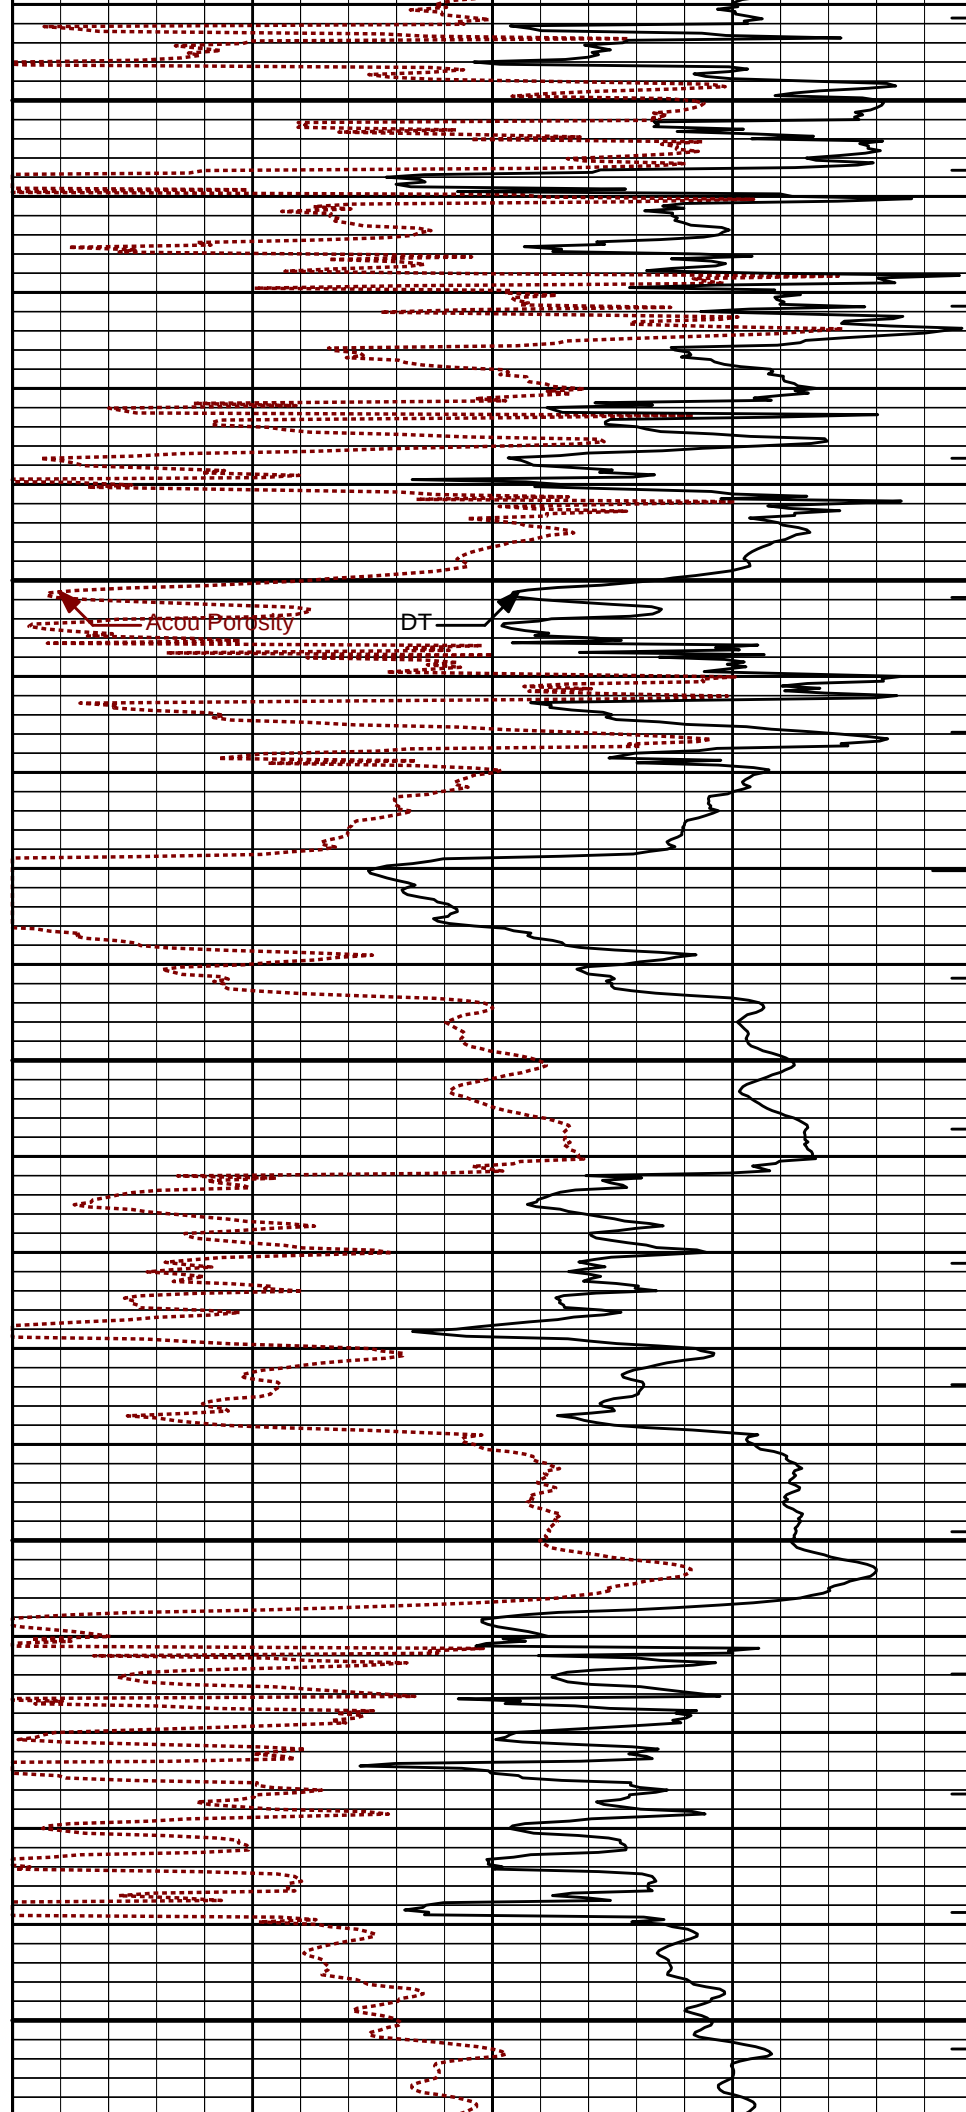

2700


2800


Gamma API

Caliper

Acou Porosity

DT

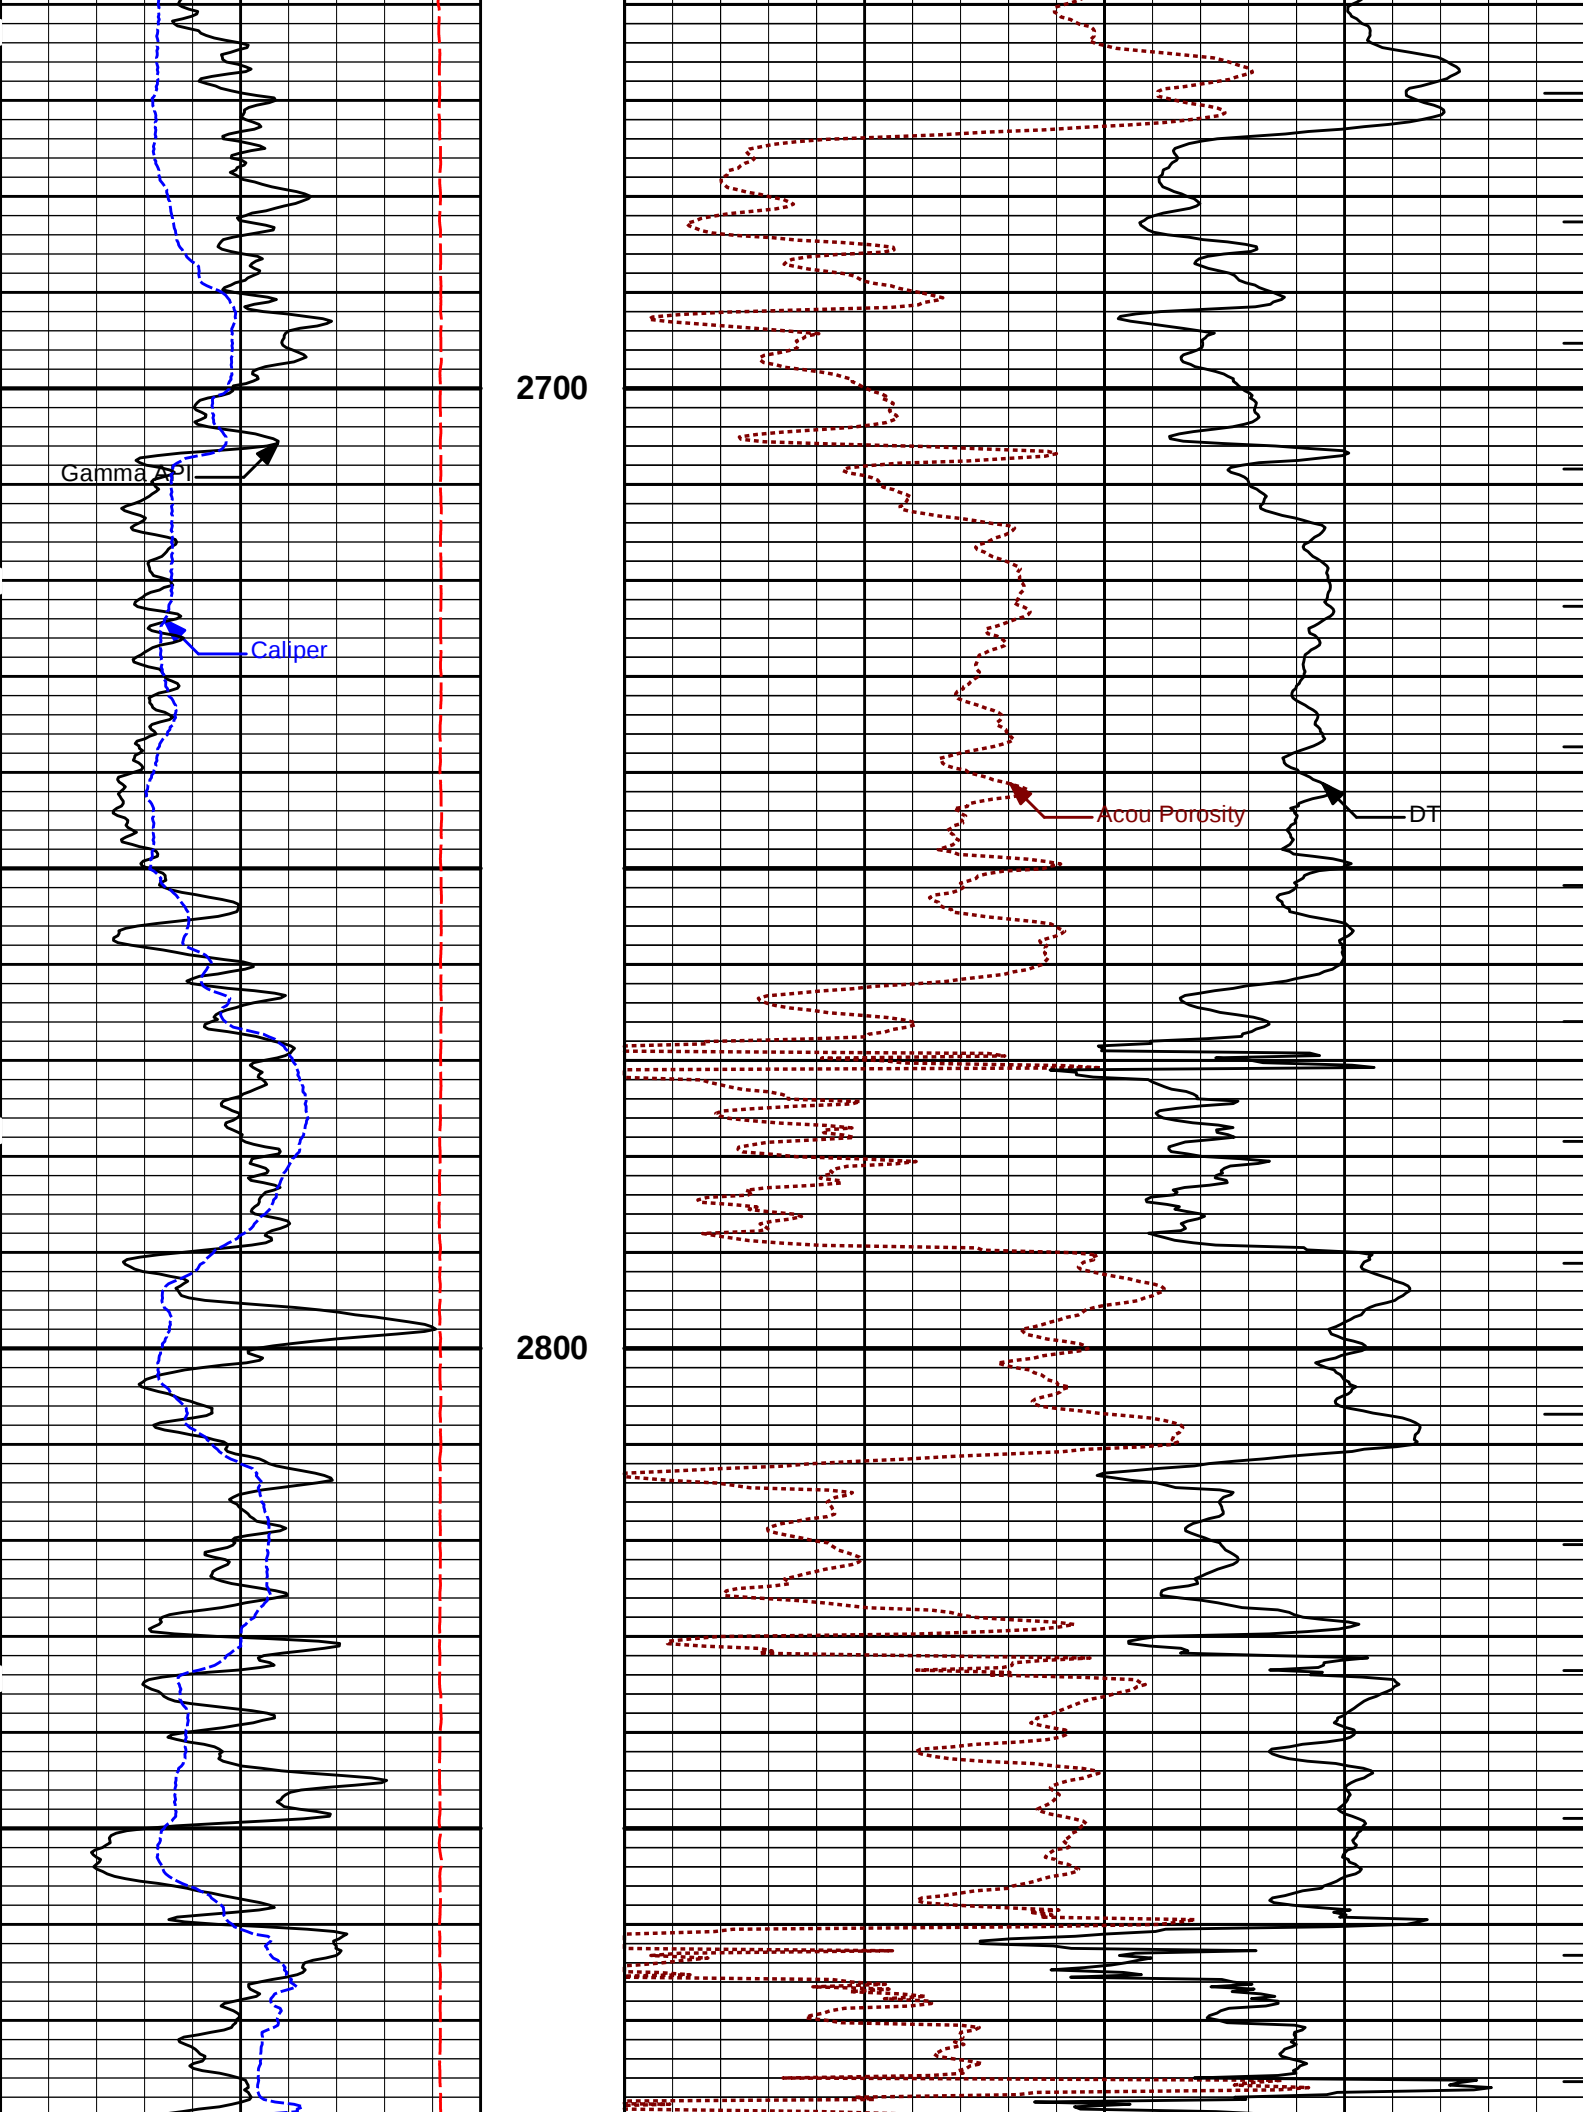


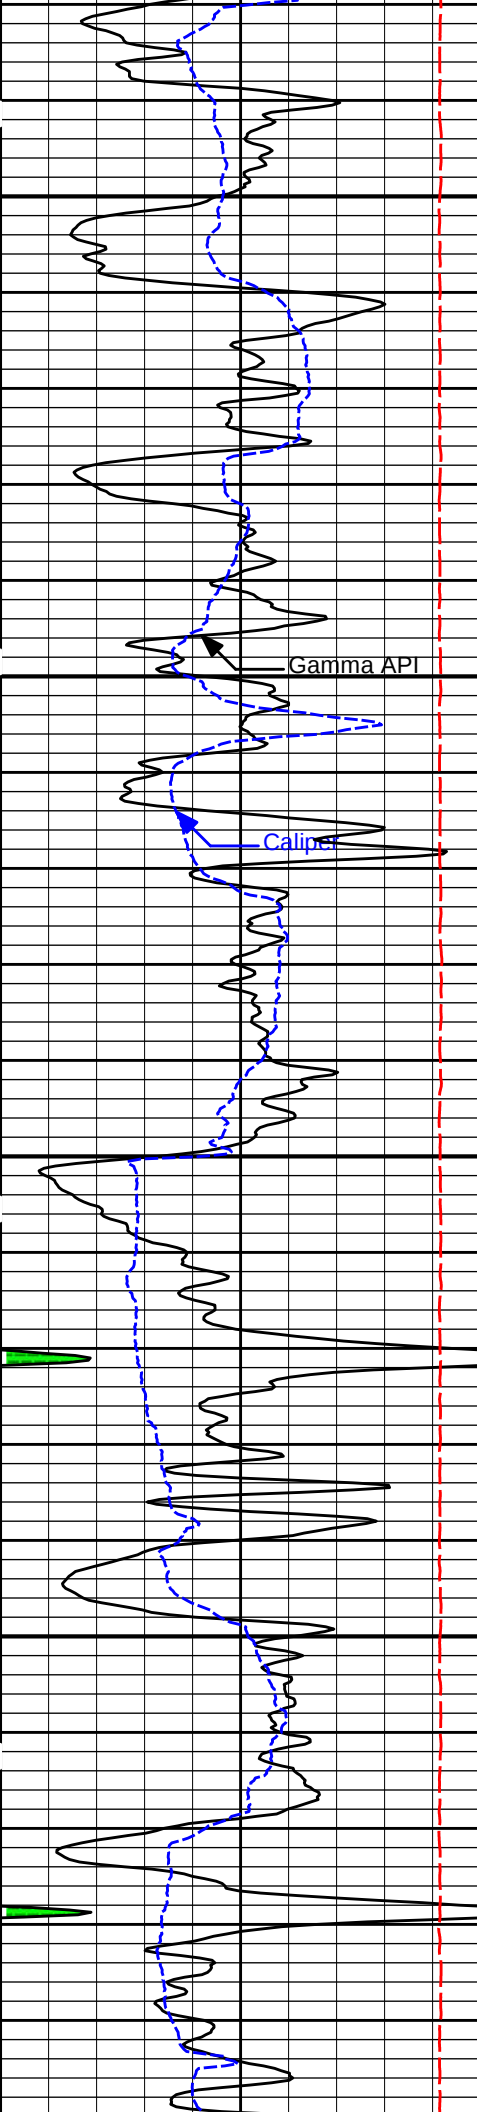


2900

3000

3100

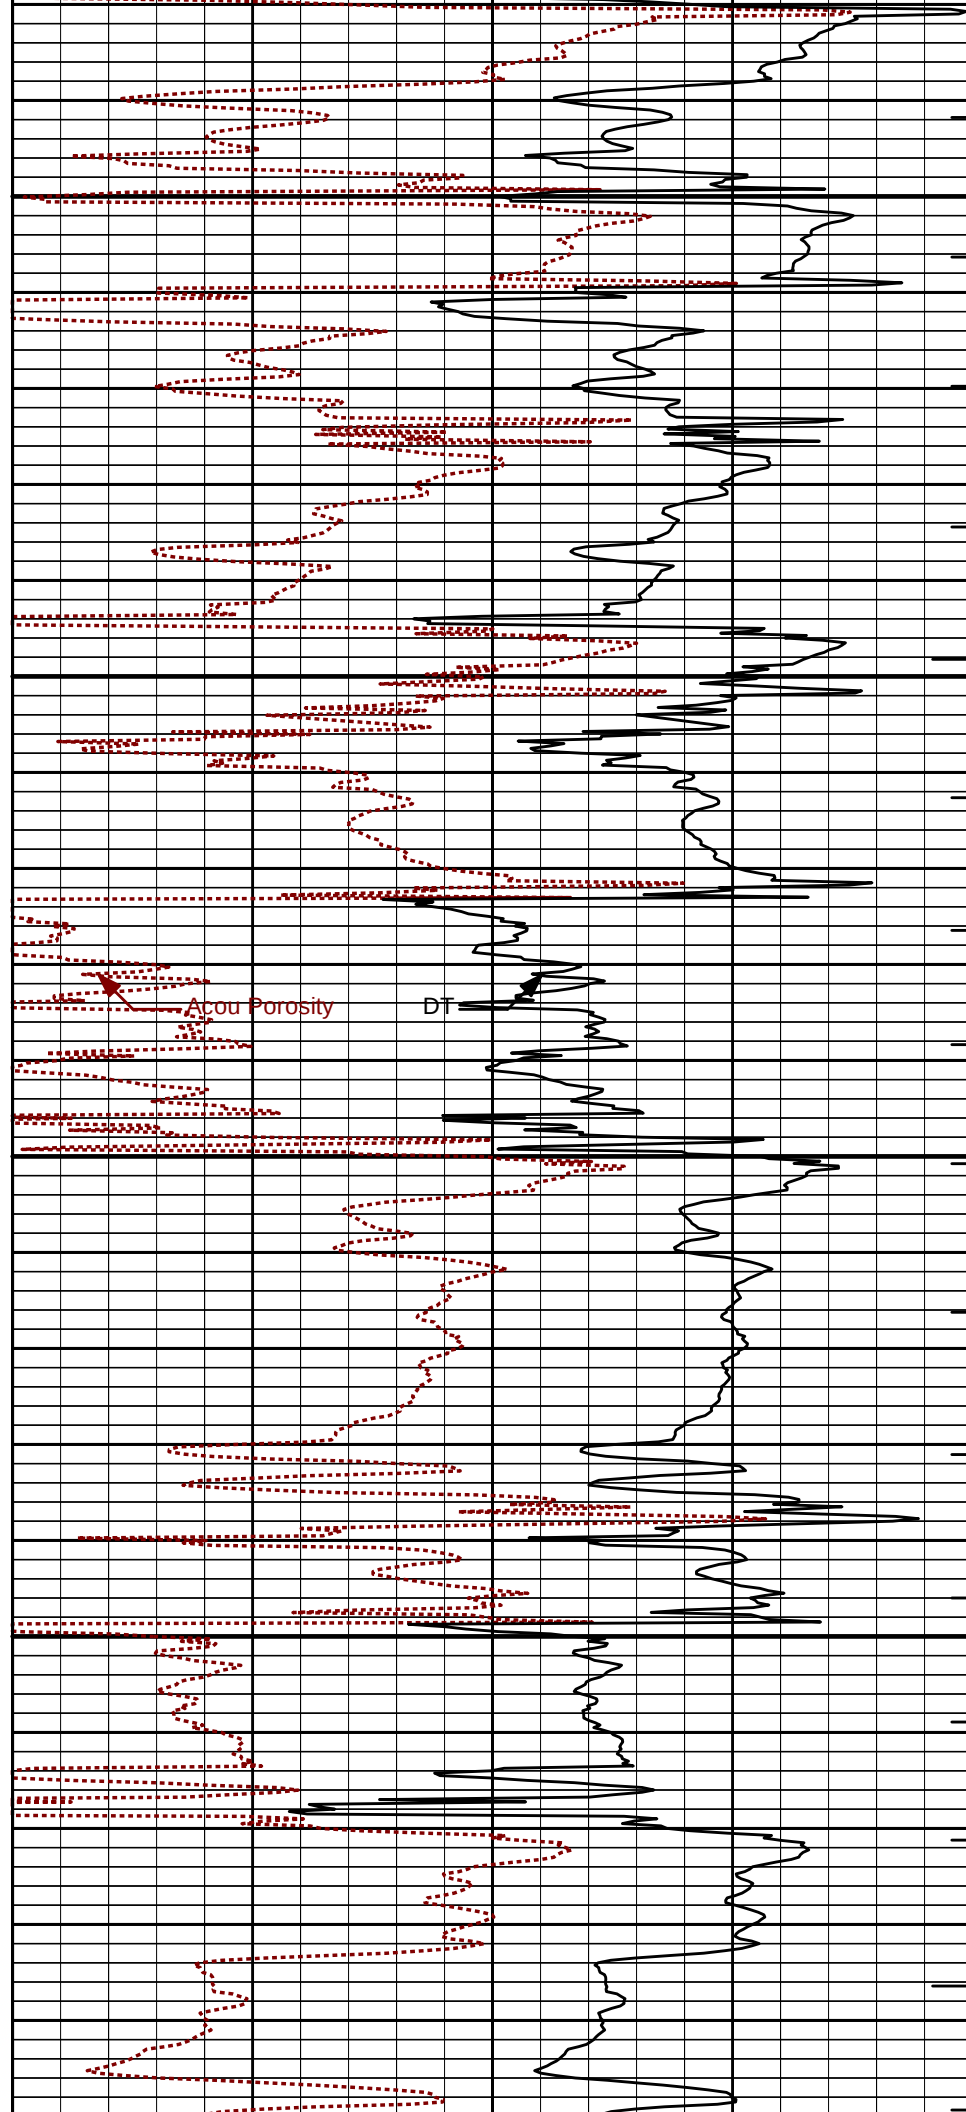


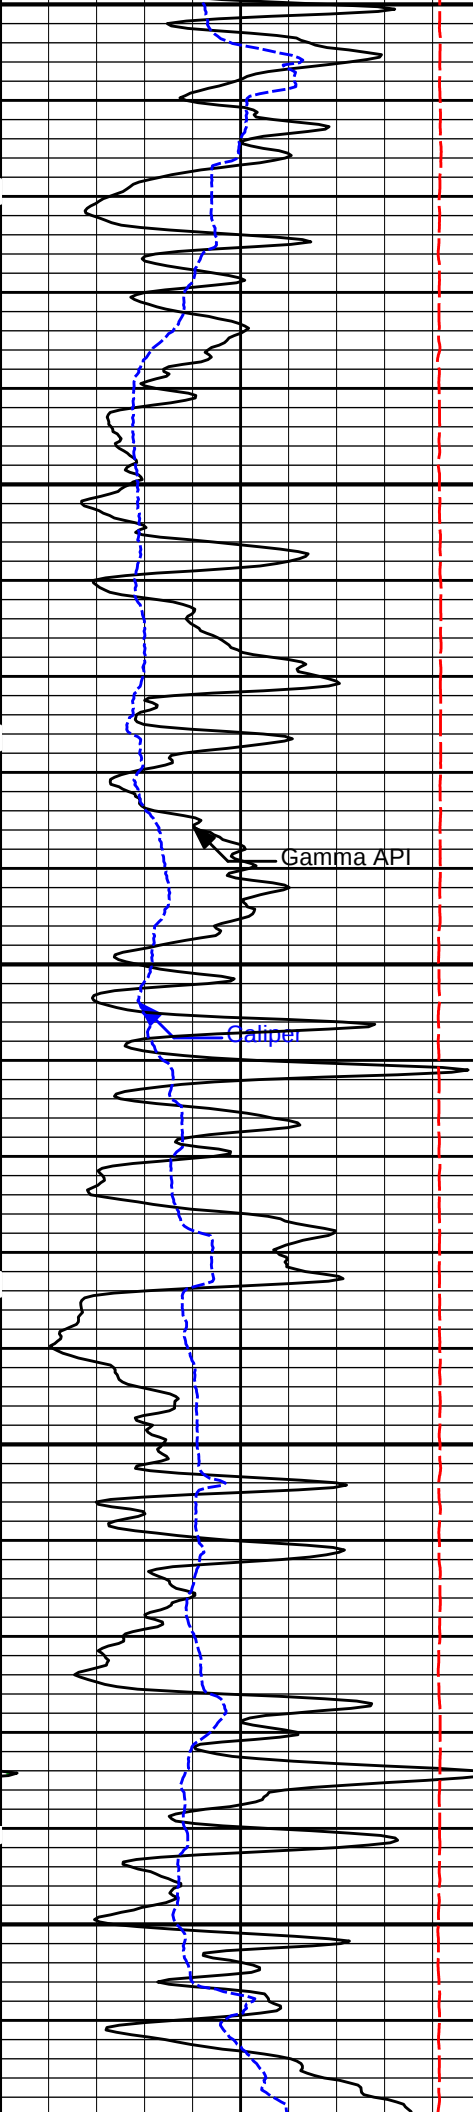


3100

3200


3300

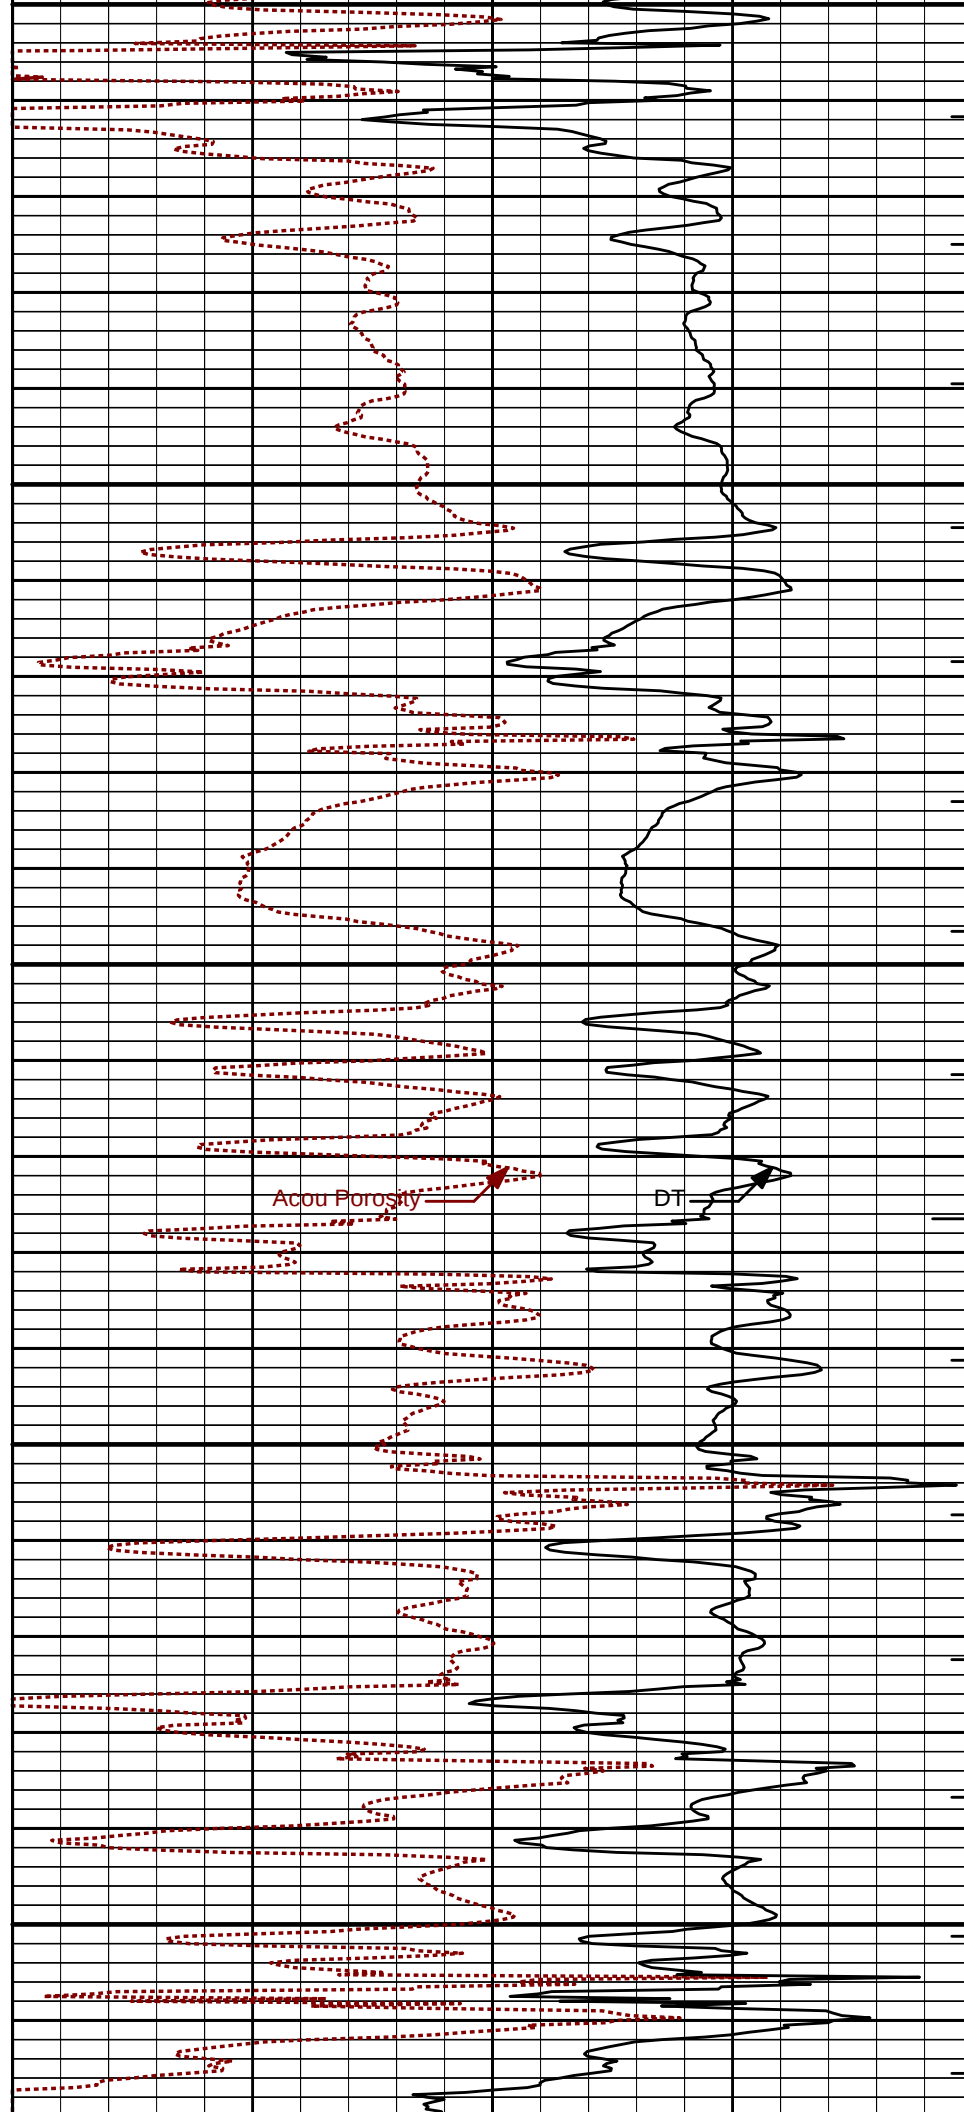


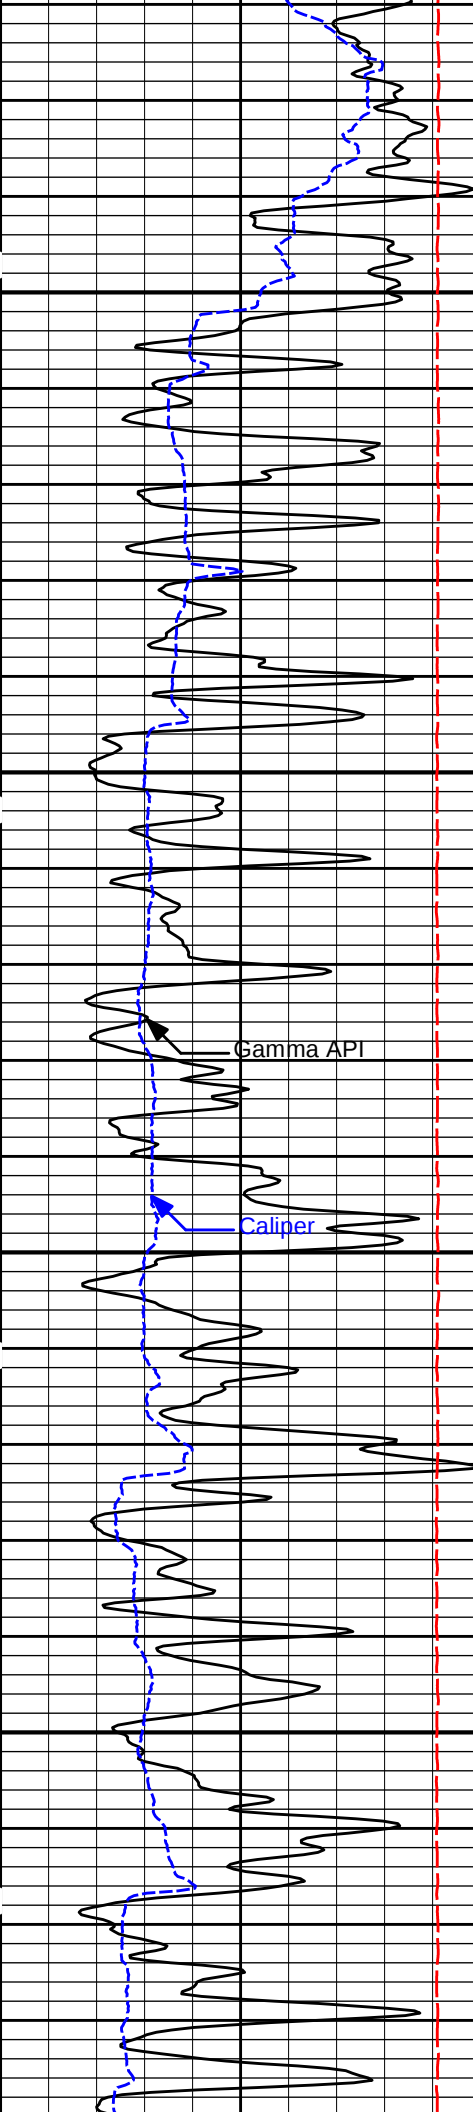

3400


3500

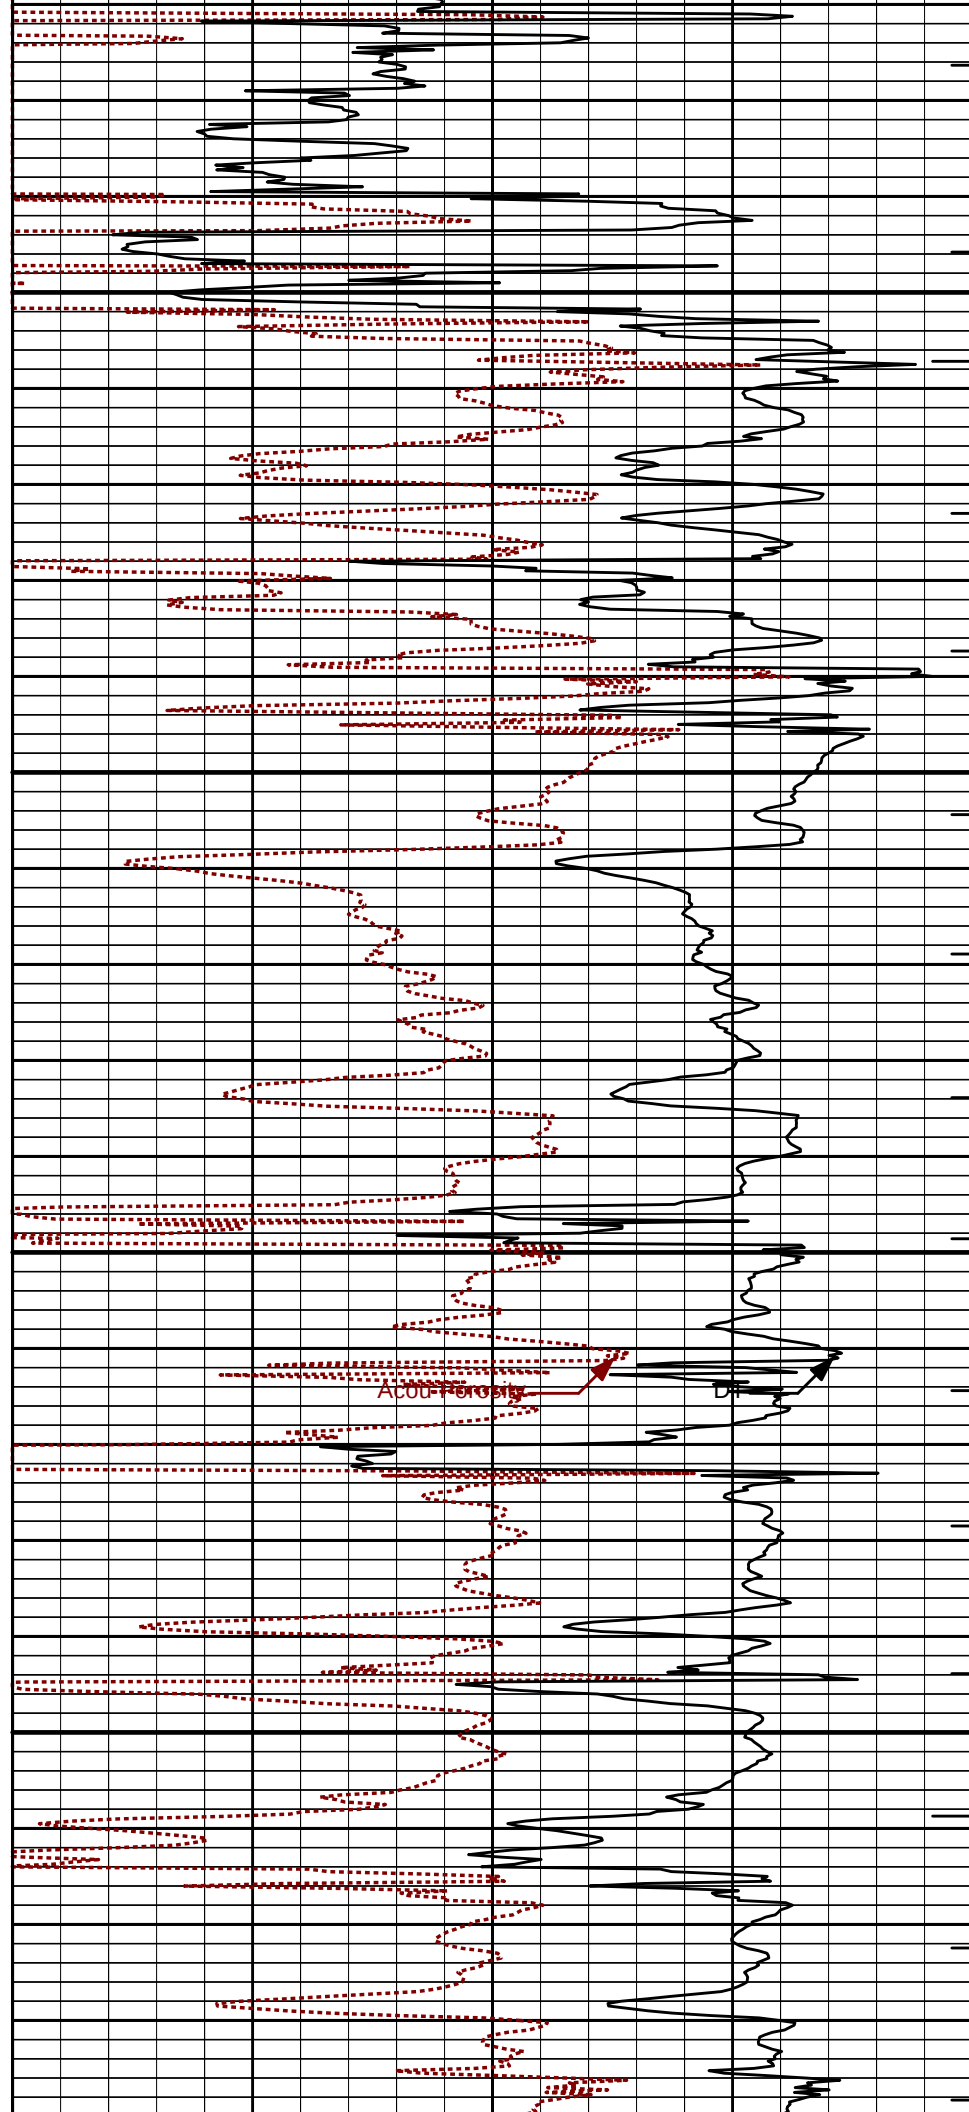


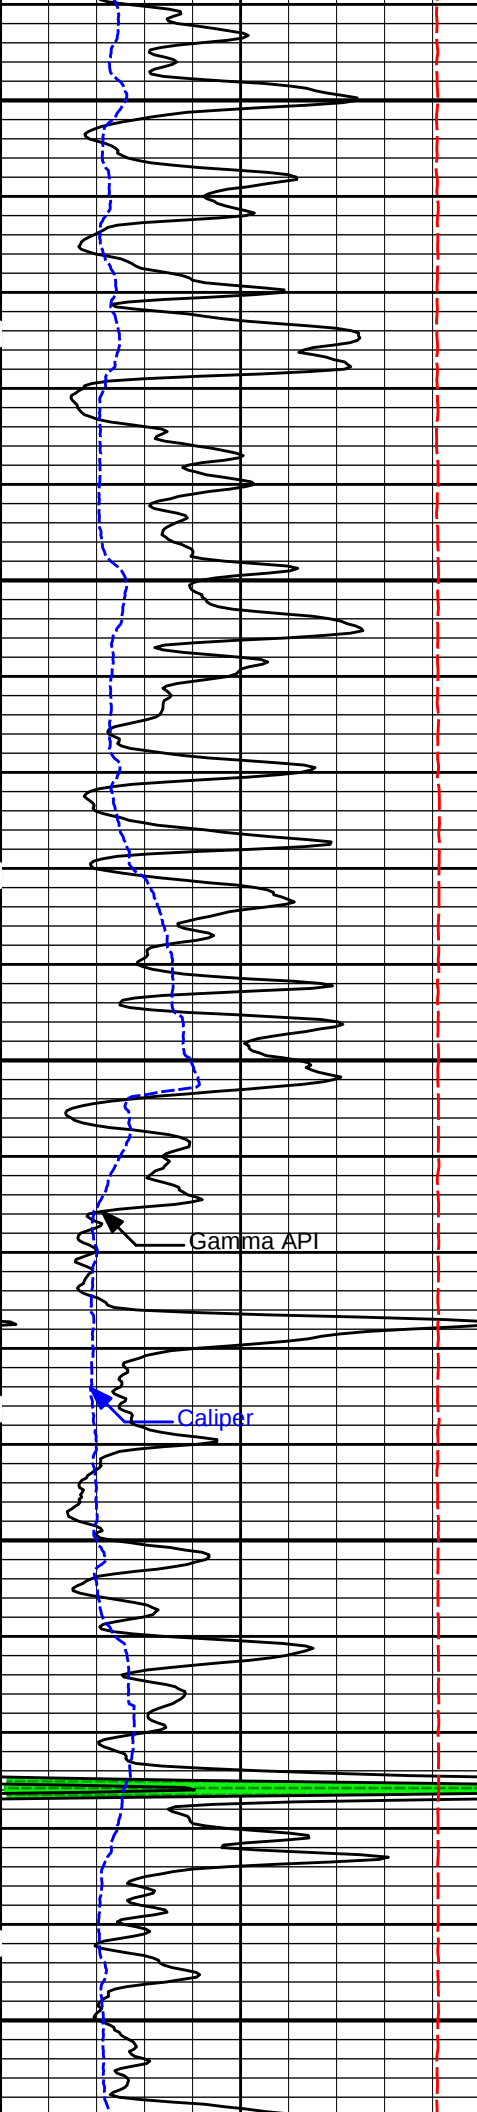

3600


3700

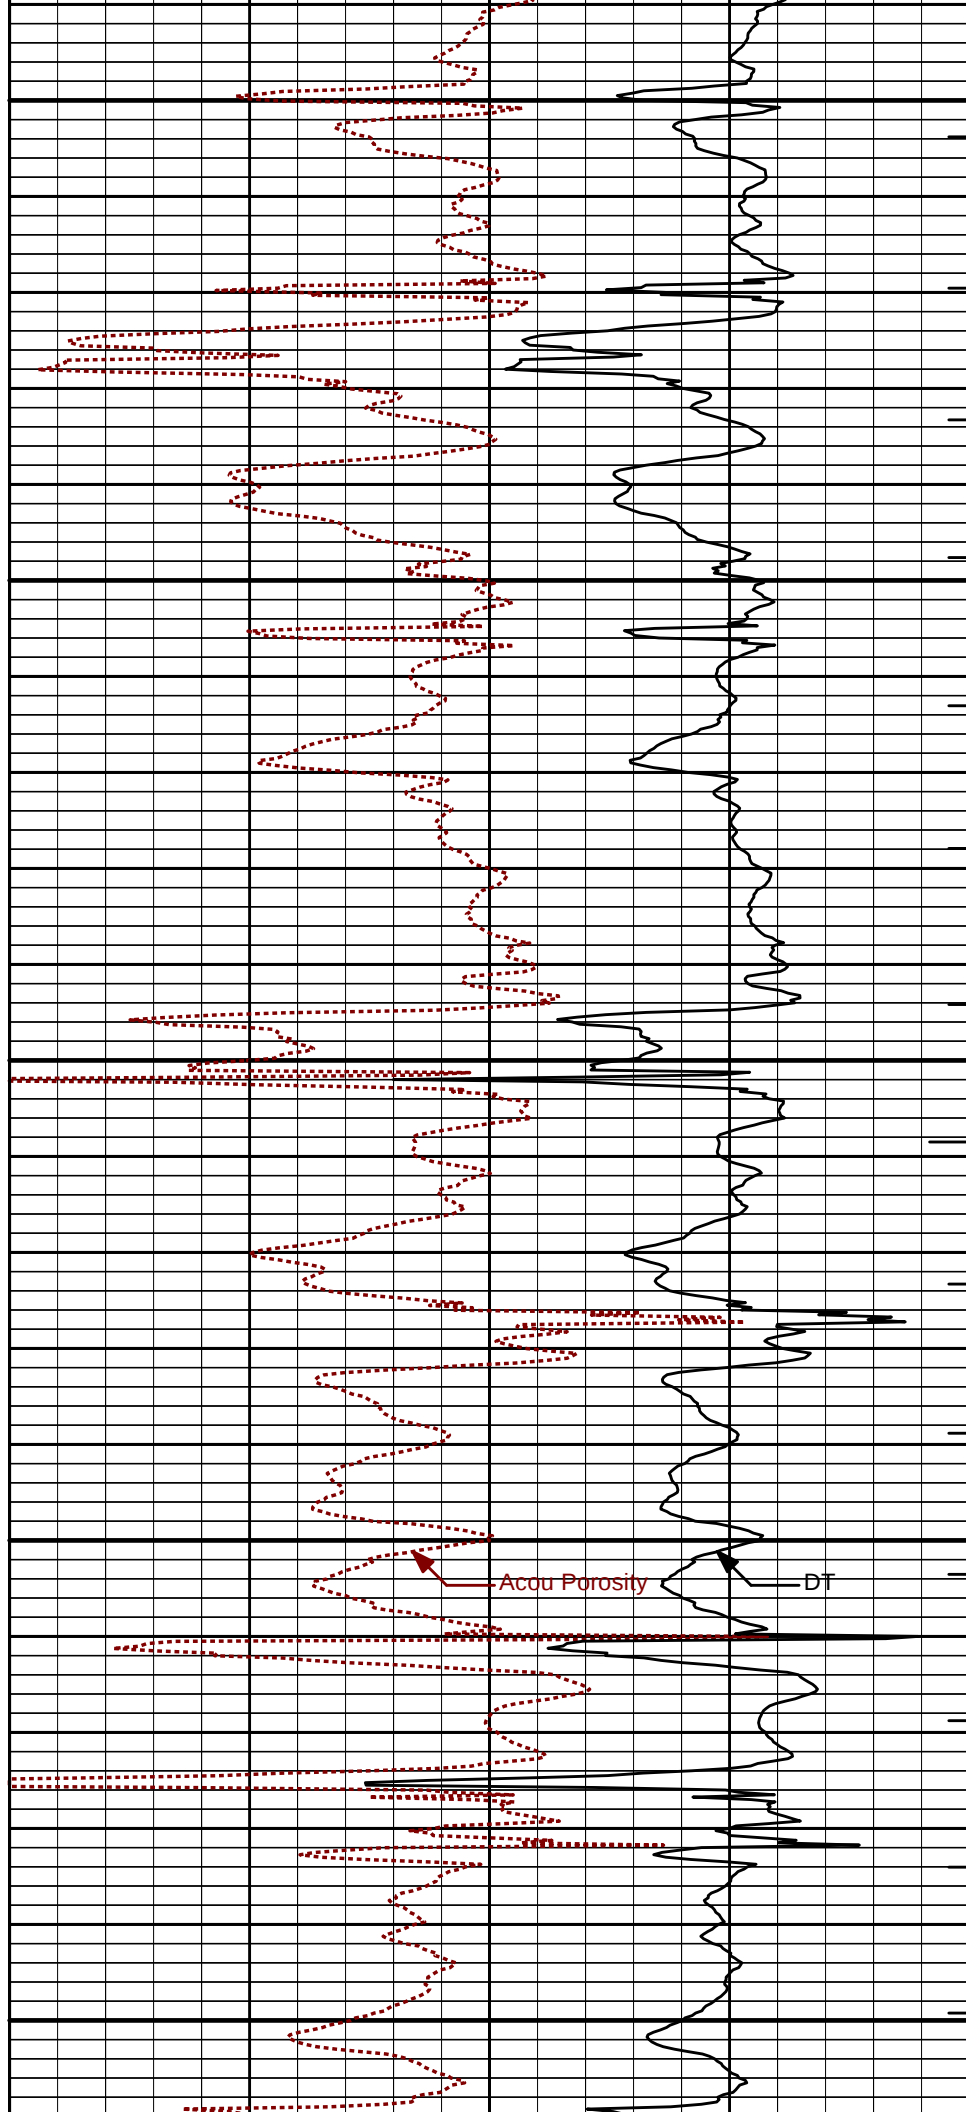


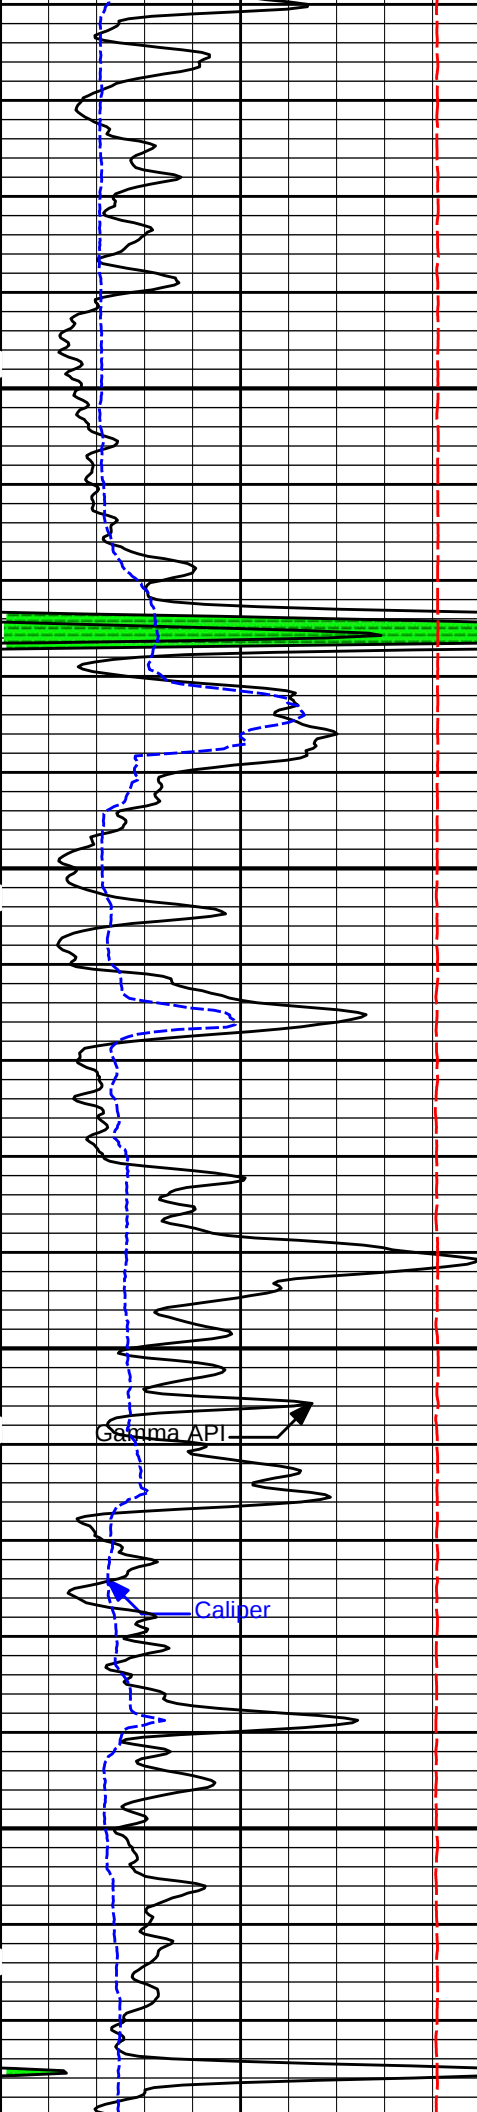

3800

3900

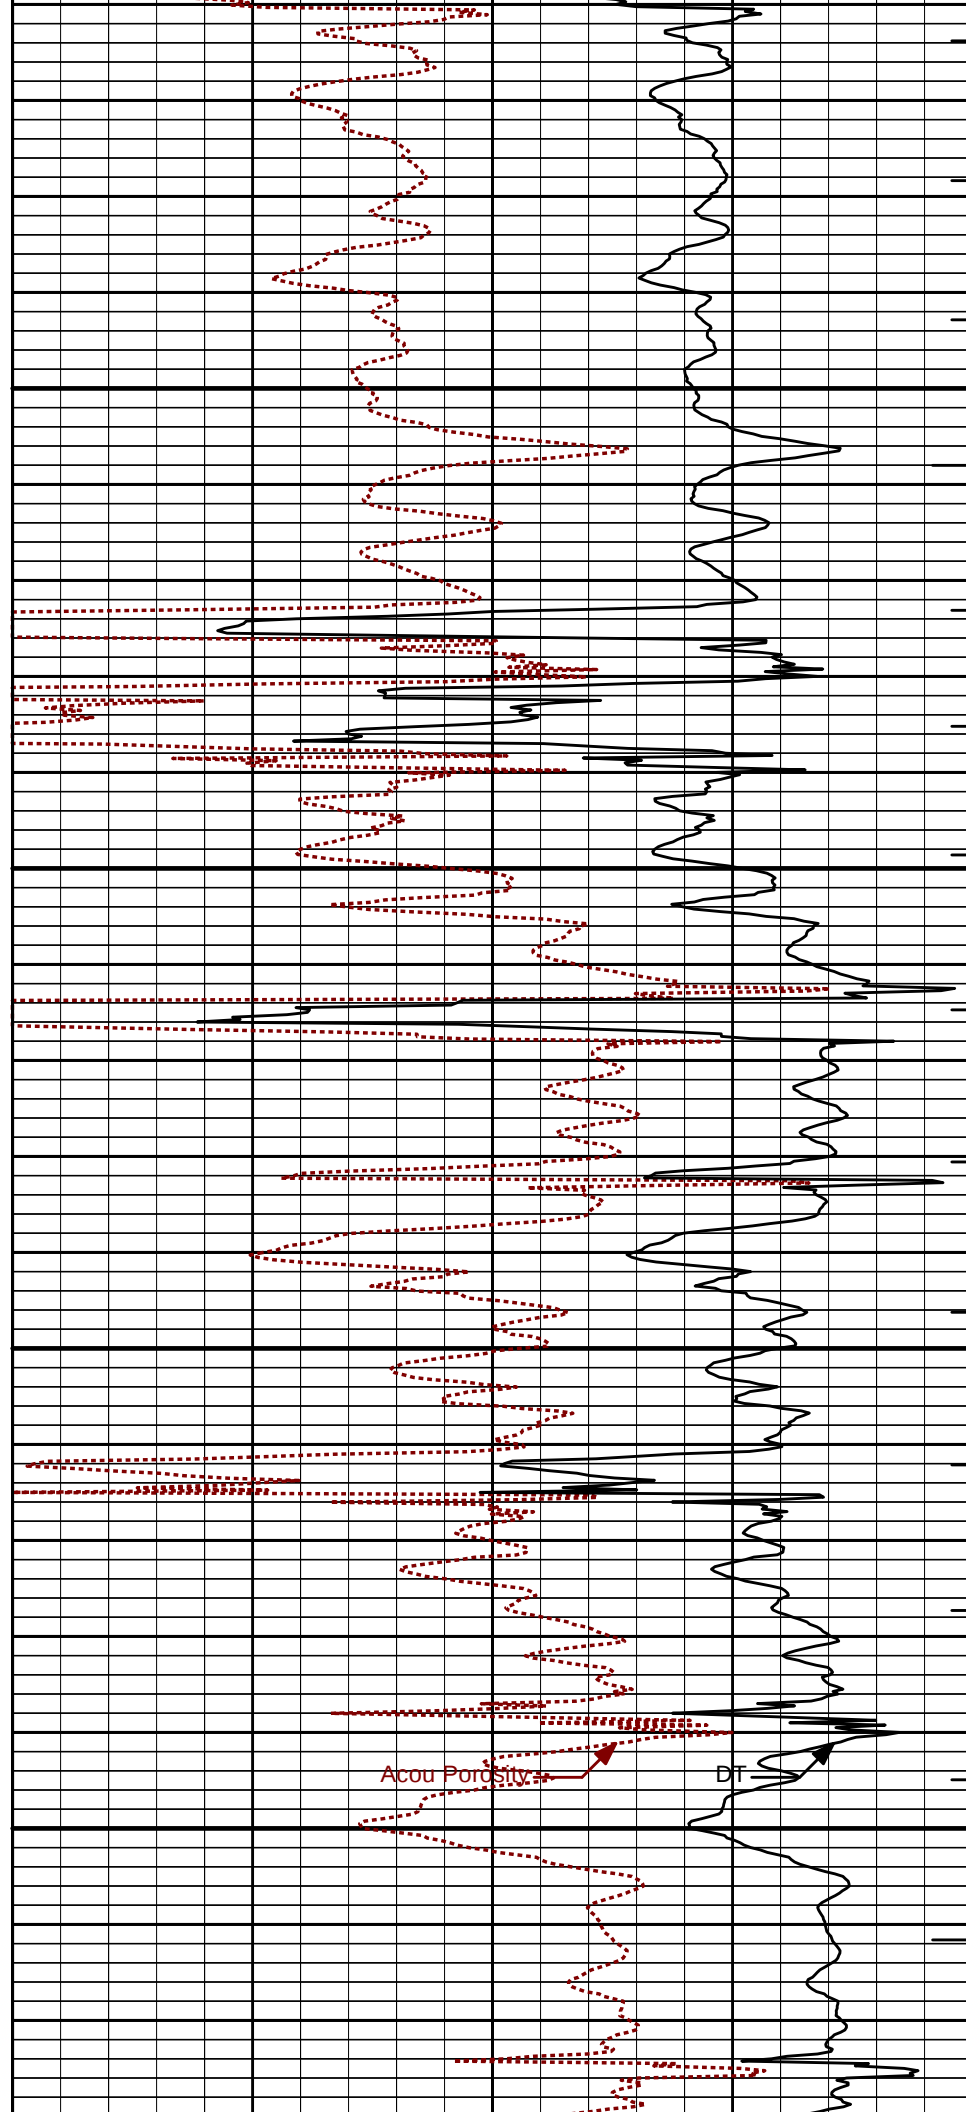


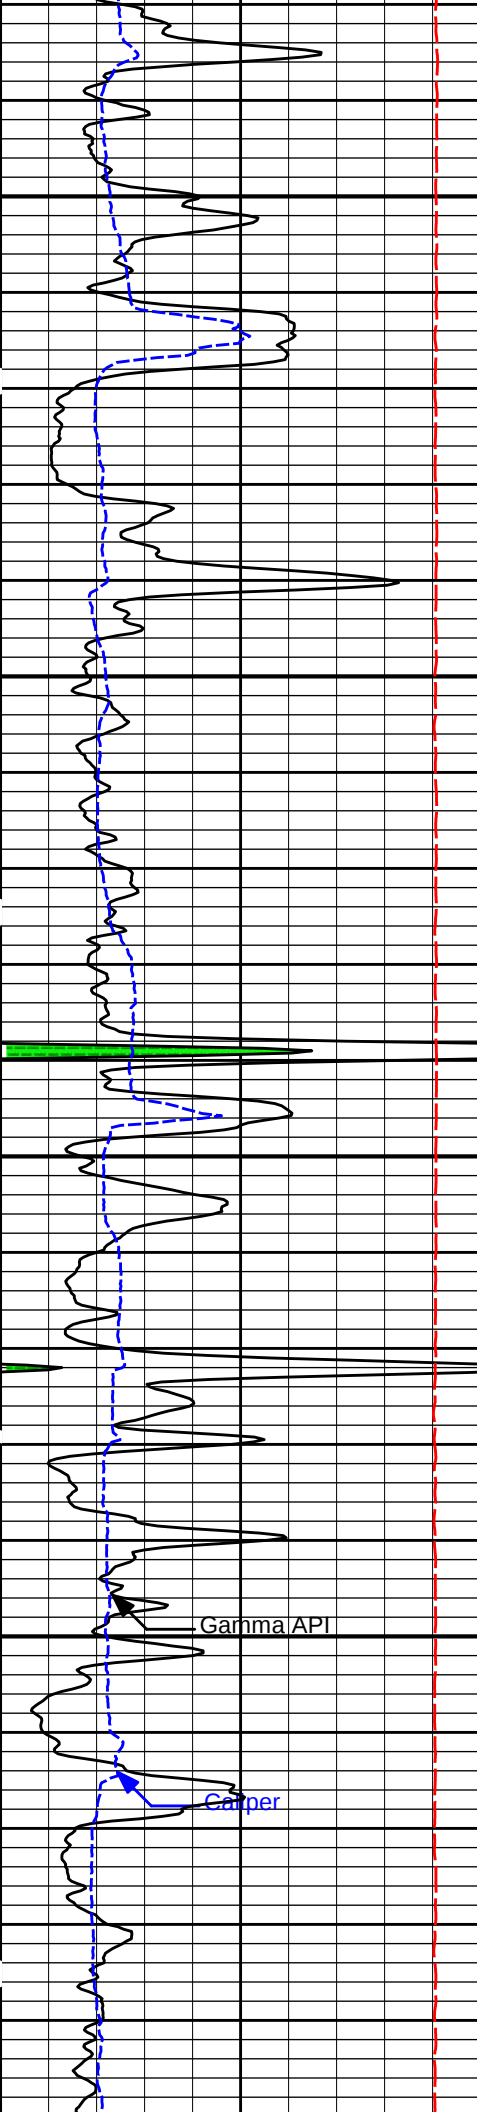


4000

4100

4200

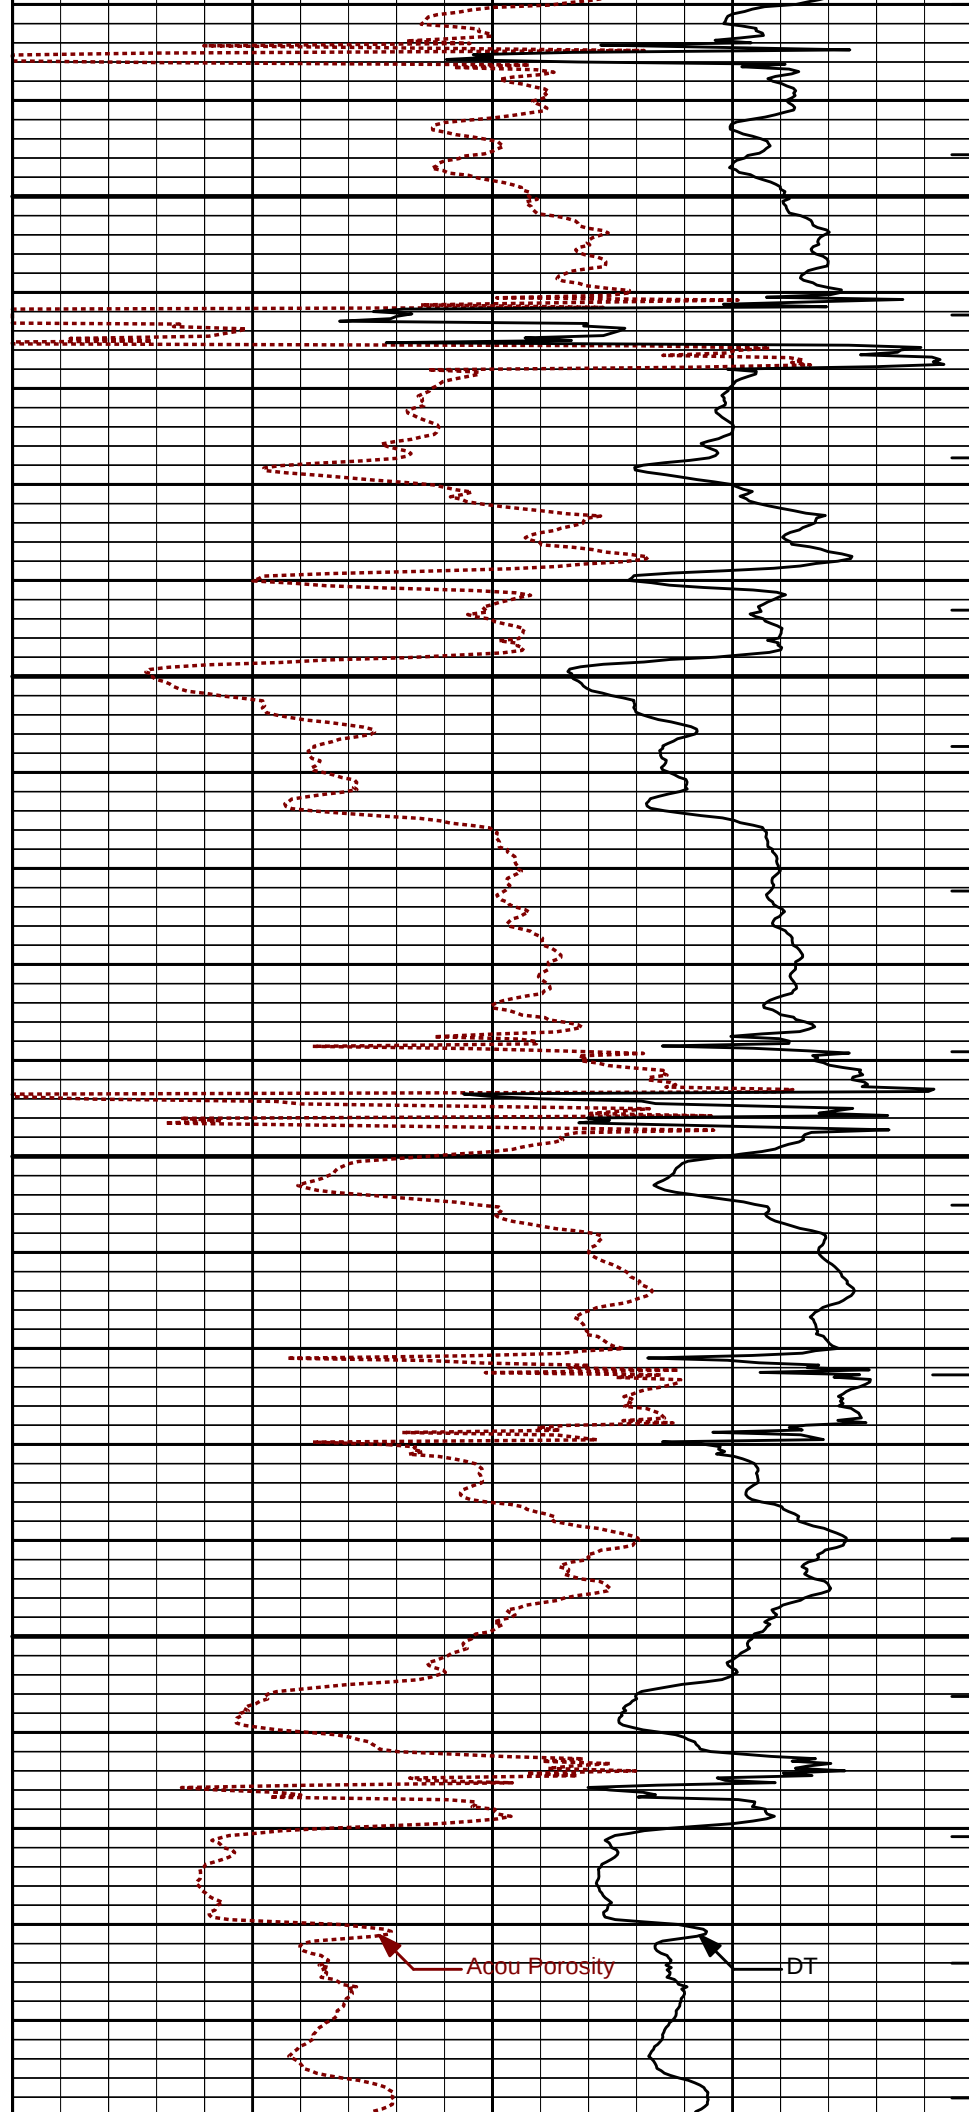


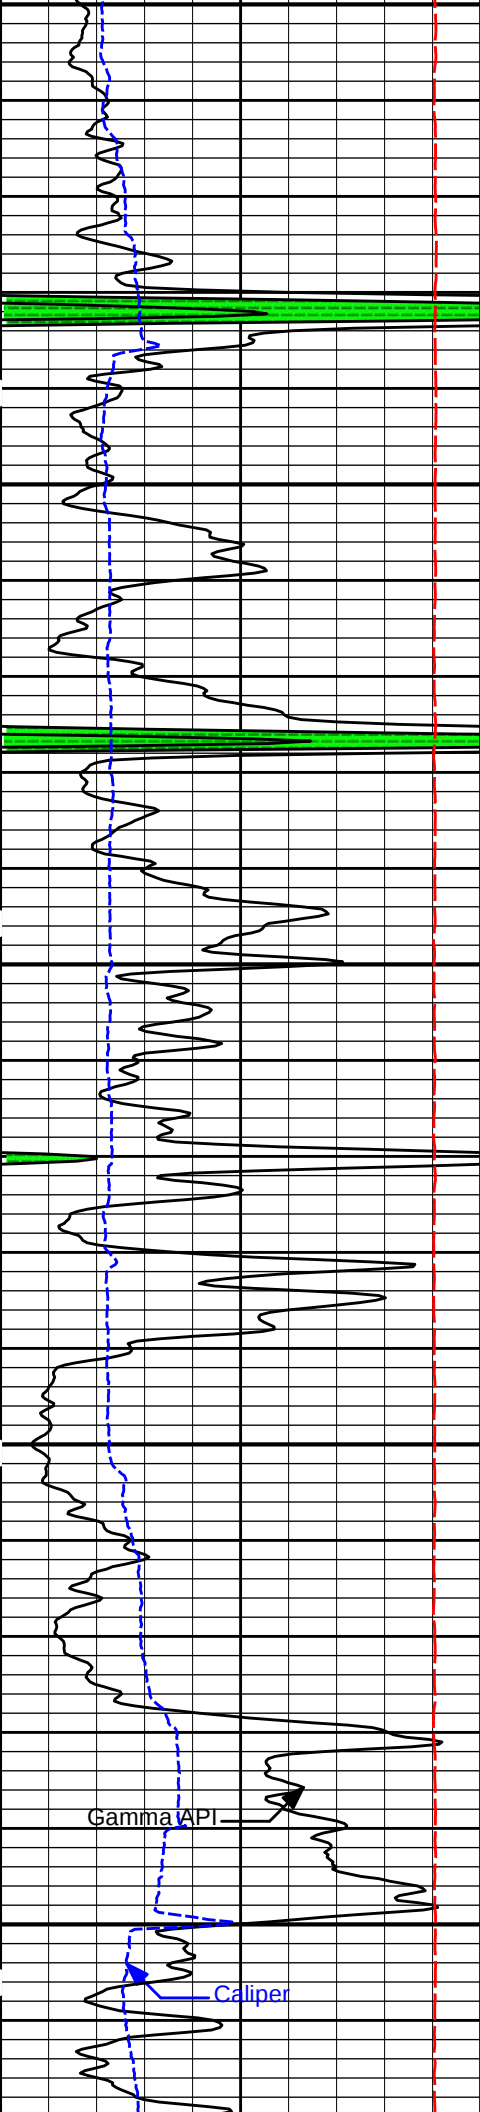


4200

4300


4400

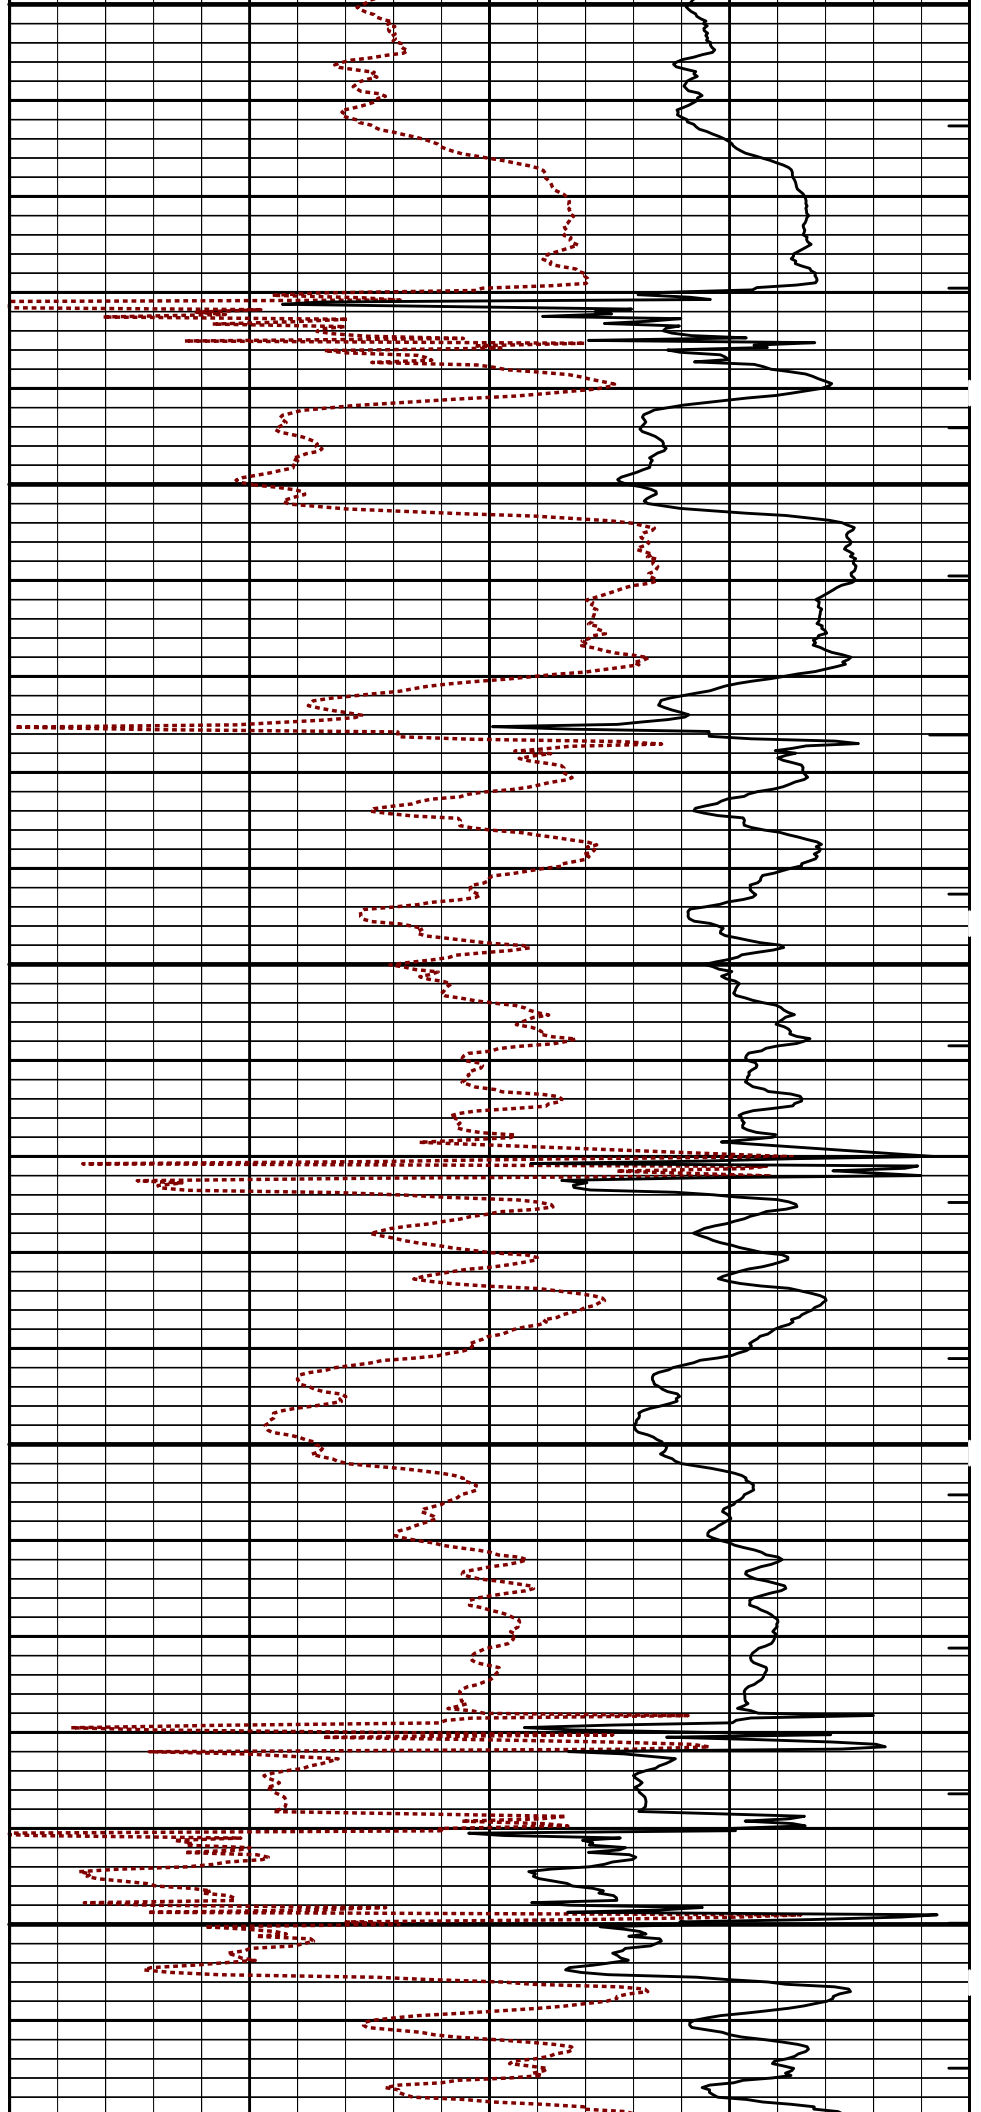


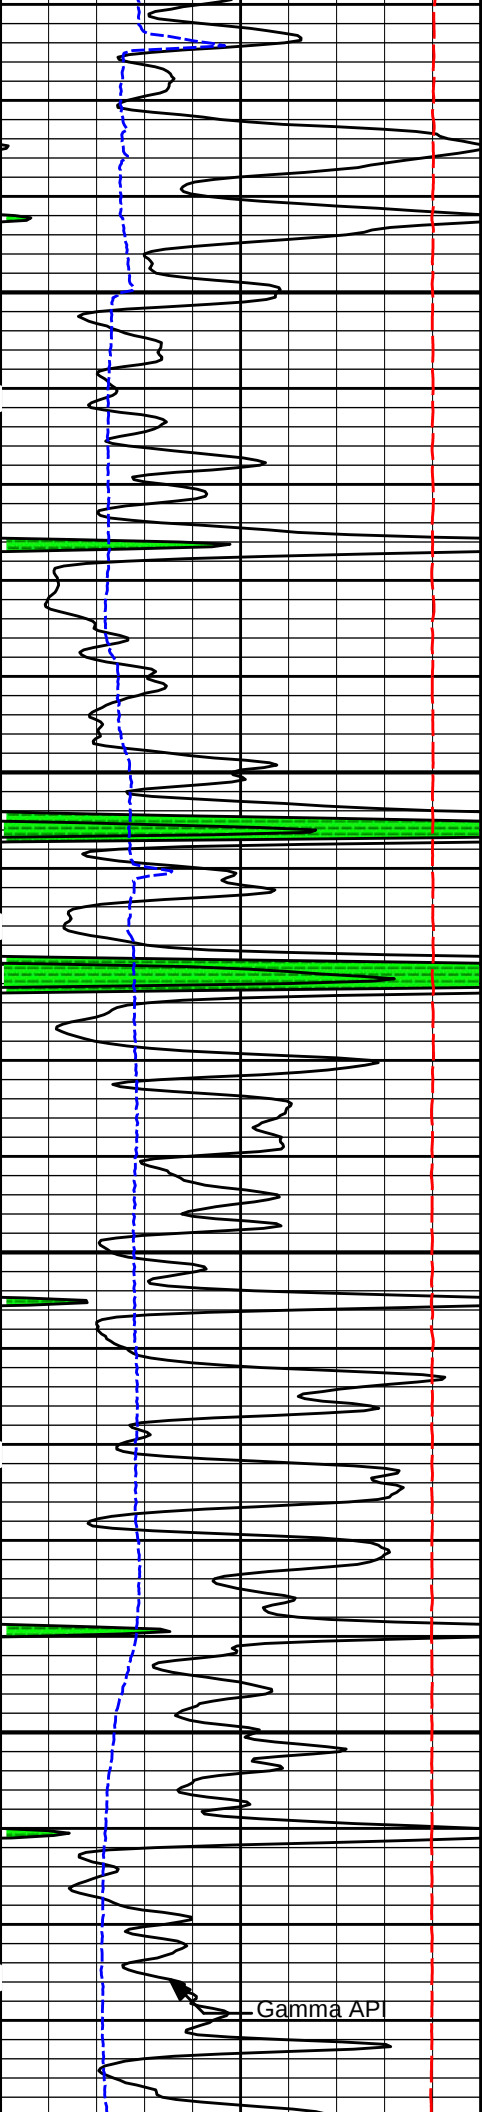

4500


4600

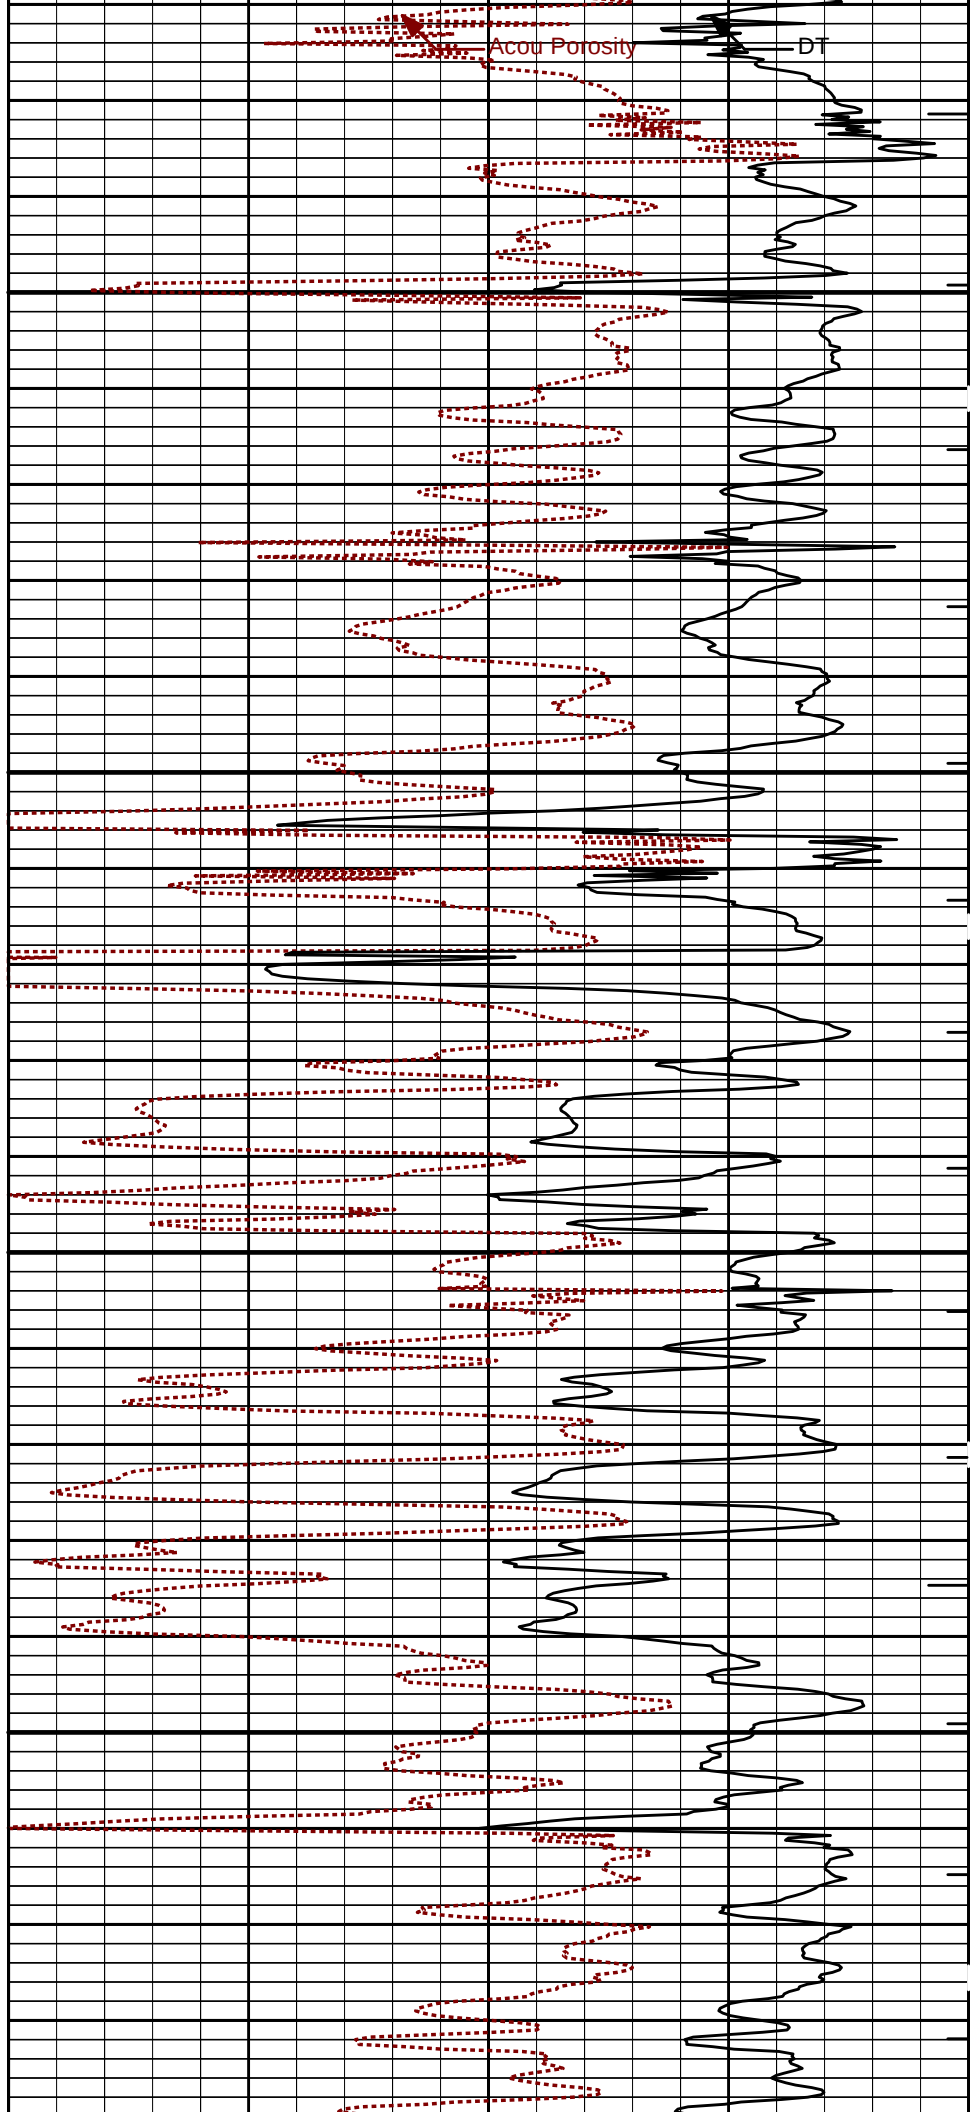


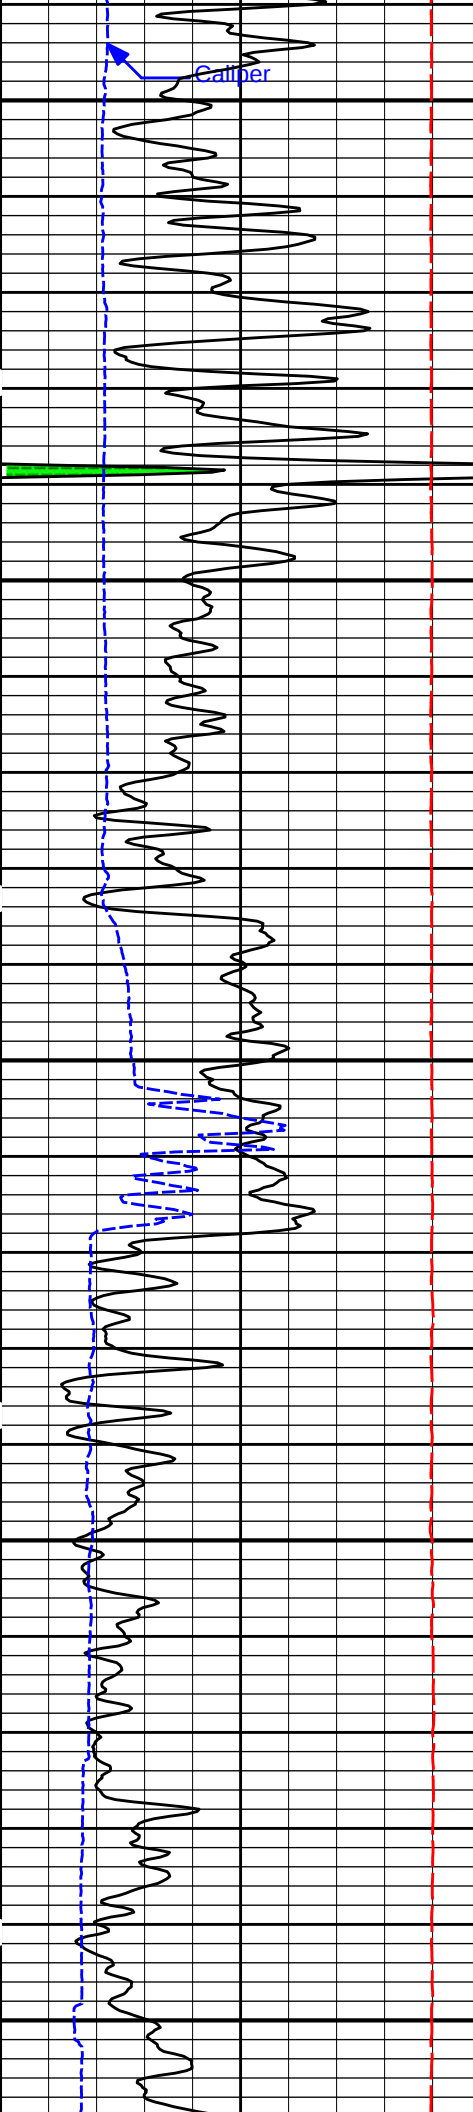

4700

4800

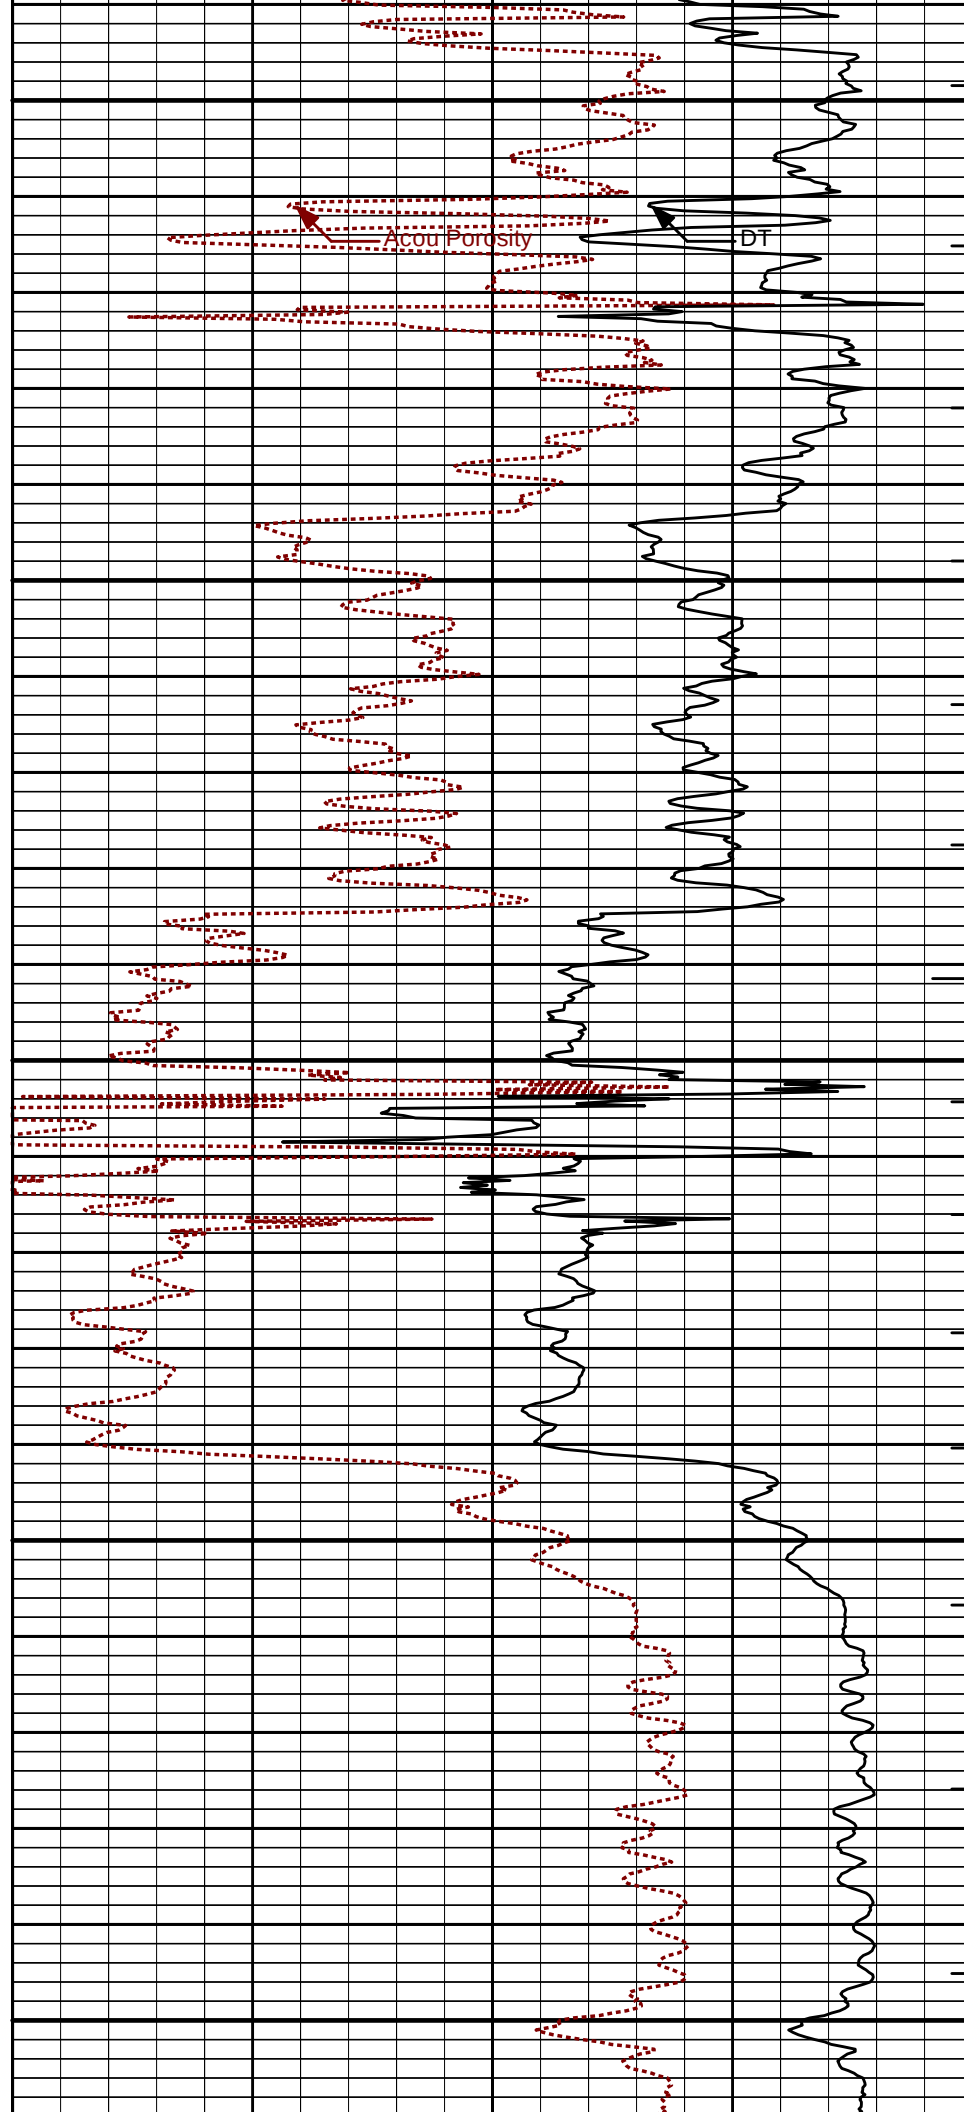

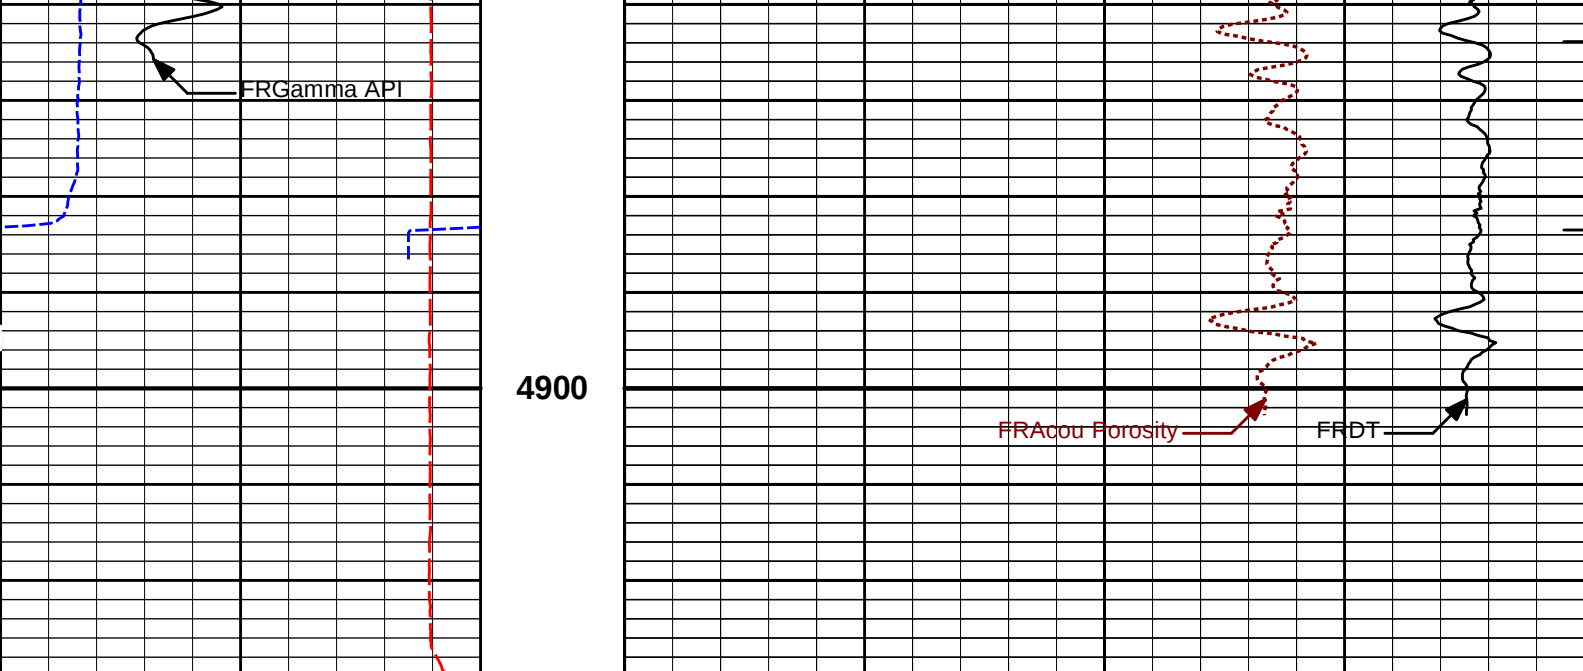

15K	Tens	0	MD	1 : 240	ITTT
	pounds		ft		
6	Caliper	16	Tension Pull	10 0 140	DT
	inches				40
0	Gamma API	150		microsec per ft	
	api		Tension Pull	30	Acou Porosity
					percent
	SHALE				

HALLIBURTON


Plot Time: 20-Aug-14 18:58:10
Plot Range: 1730 ft to 4929.75 ft
Data: LENA_MAI_3-29\Well Based\CASING\
Plot File: \\BSAT\BSAT_5_MAIN_LIB


5 INCH MAIN LOG

HALLIBURTON

Plot Time: 20-Aug-14 18:58:10
Plot Range: 4400 ft to 4932.25 ft
Data: LENA_MAI_3-29\Well Based\REPEAT\
Plot File: \\BSAT\BSAT_5_REP_LIB


REPEAT SECTION

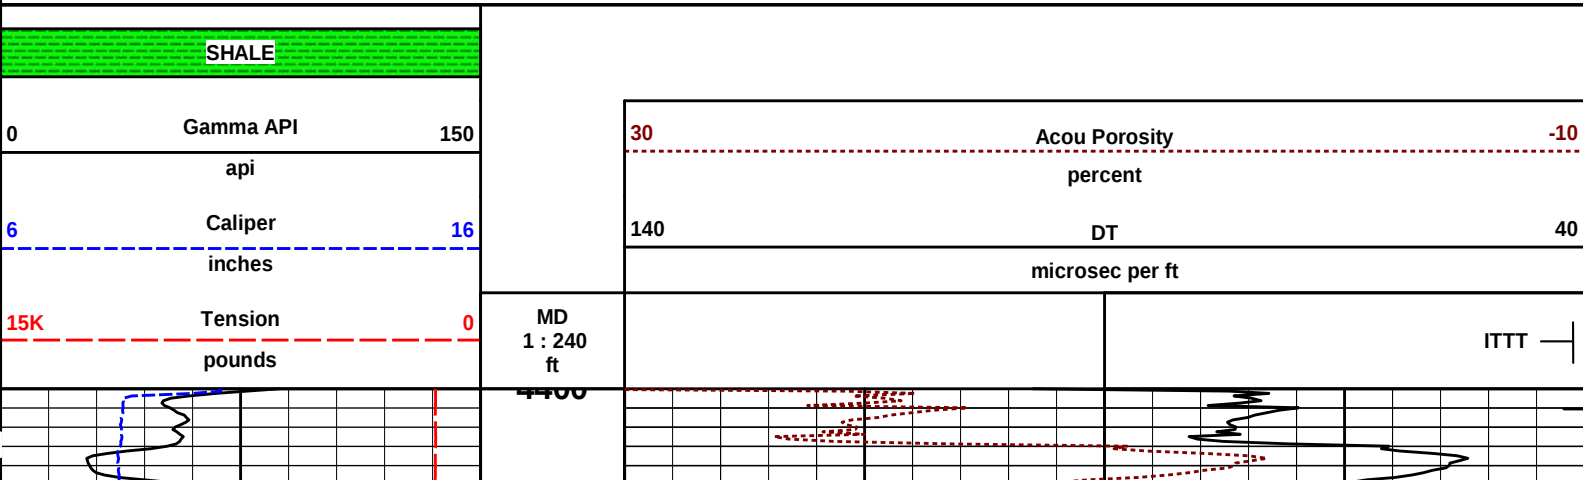


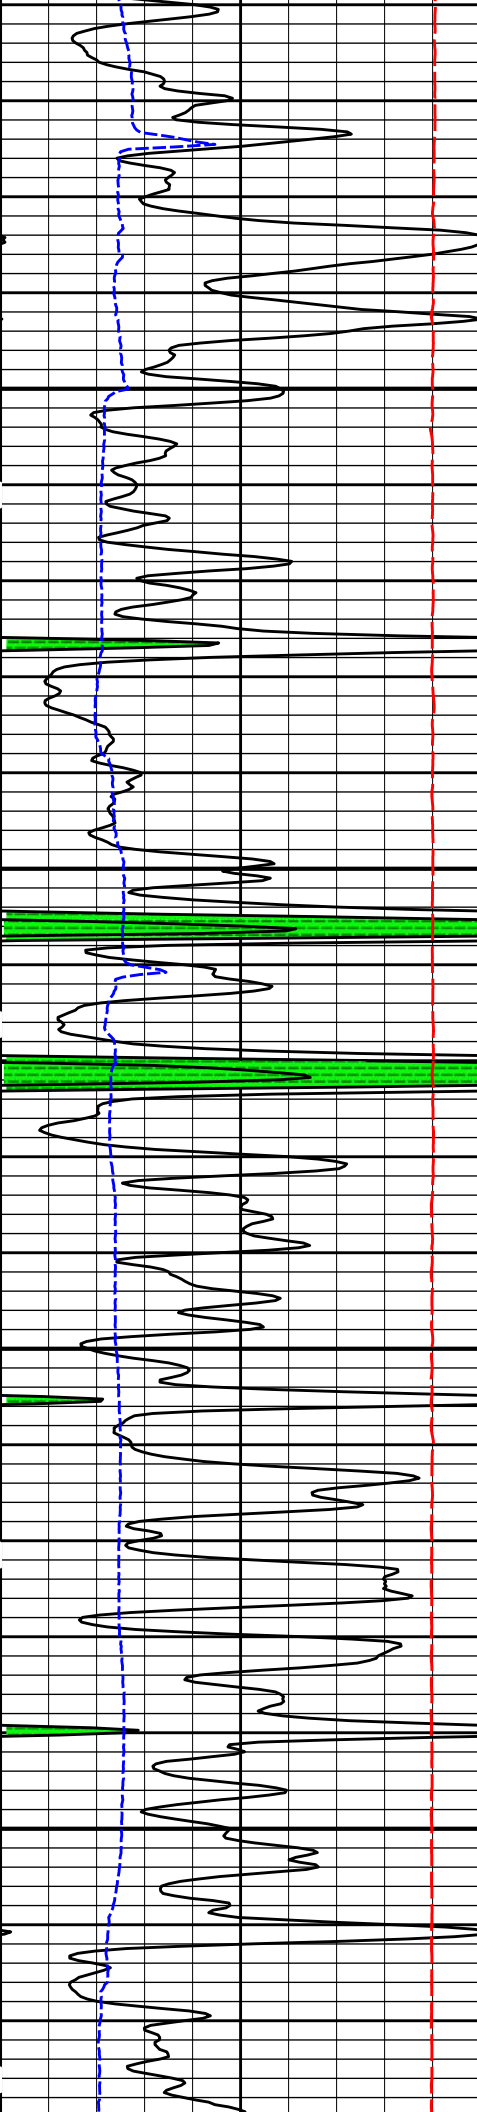

4500


4600

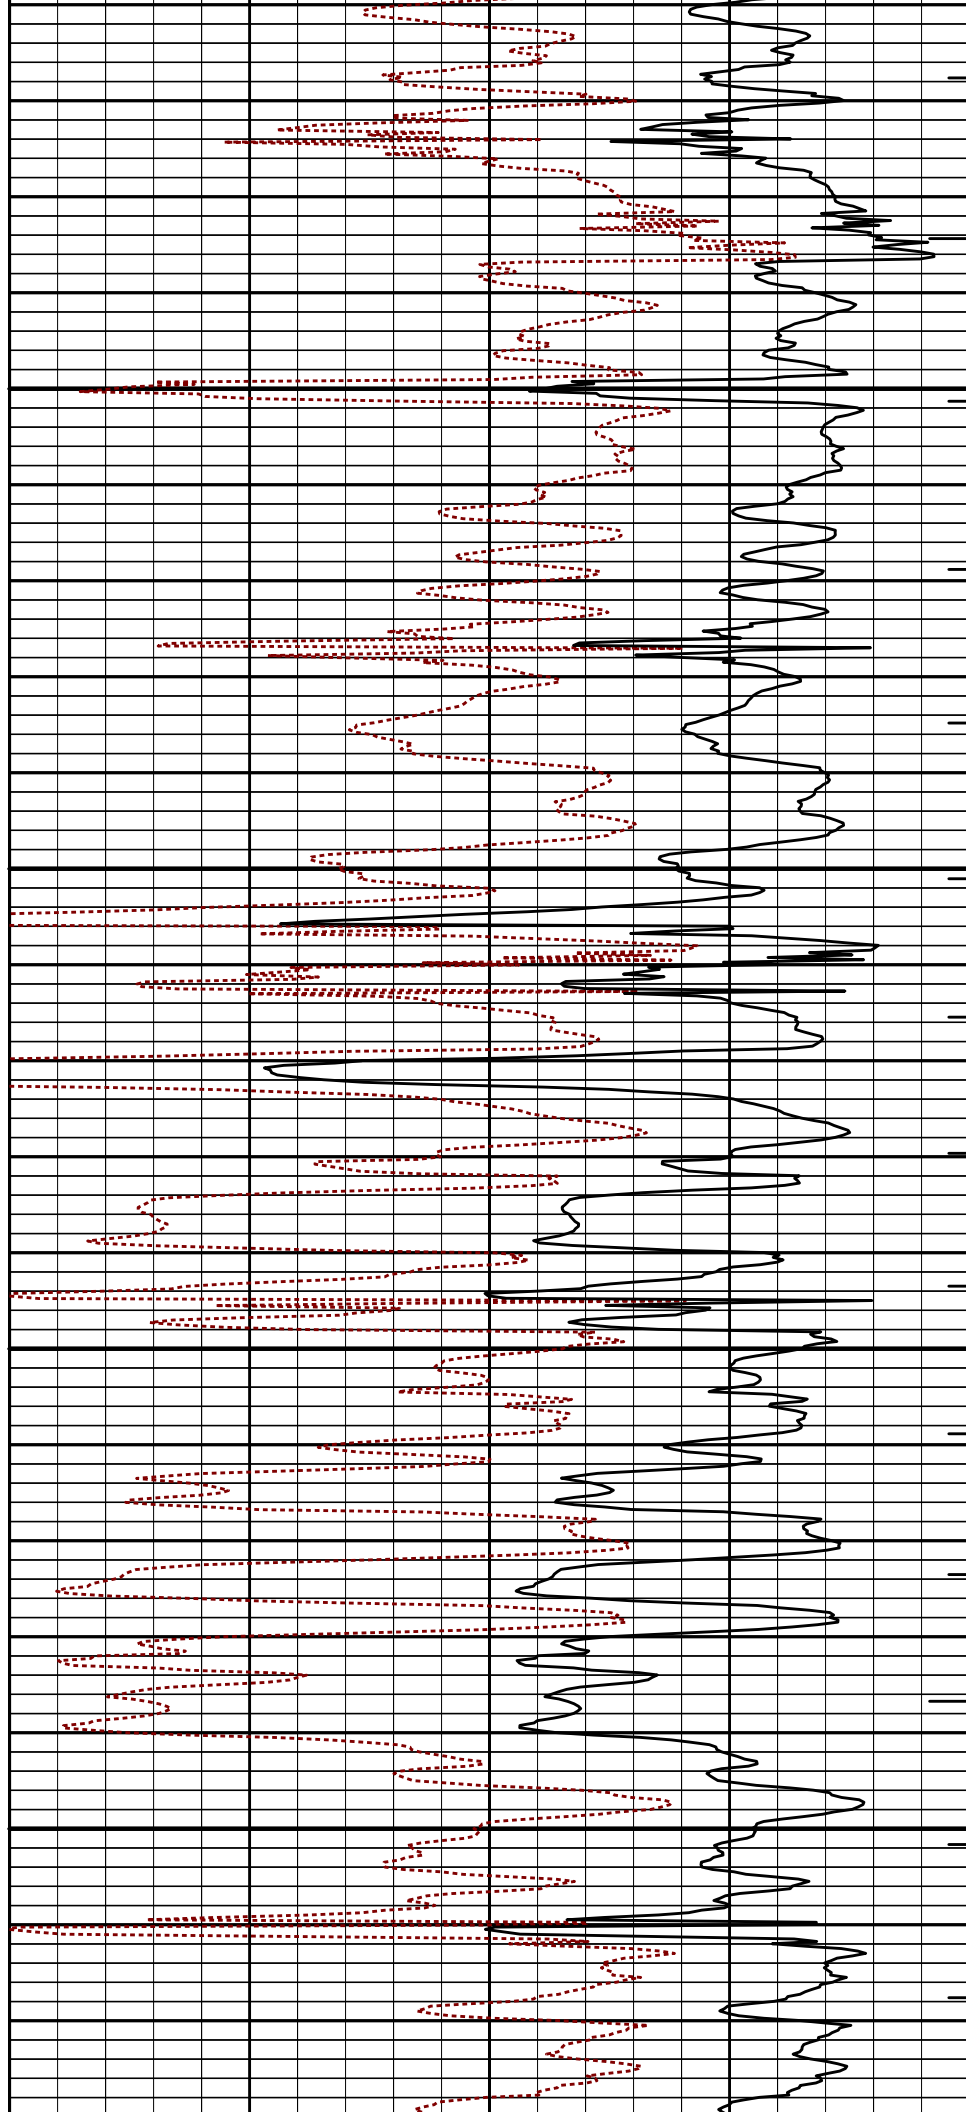


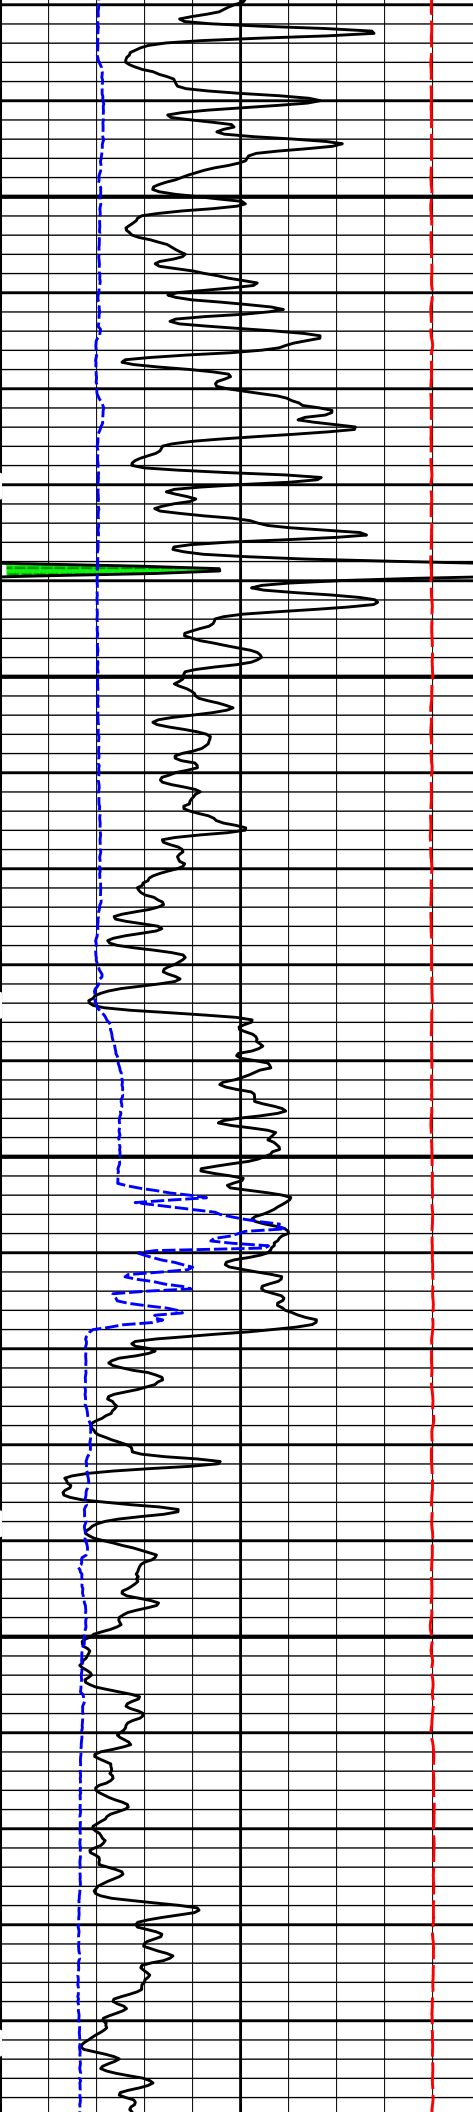

4700

4800

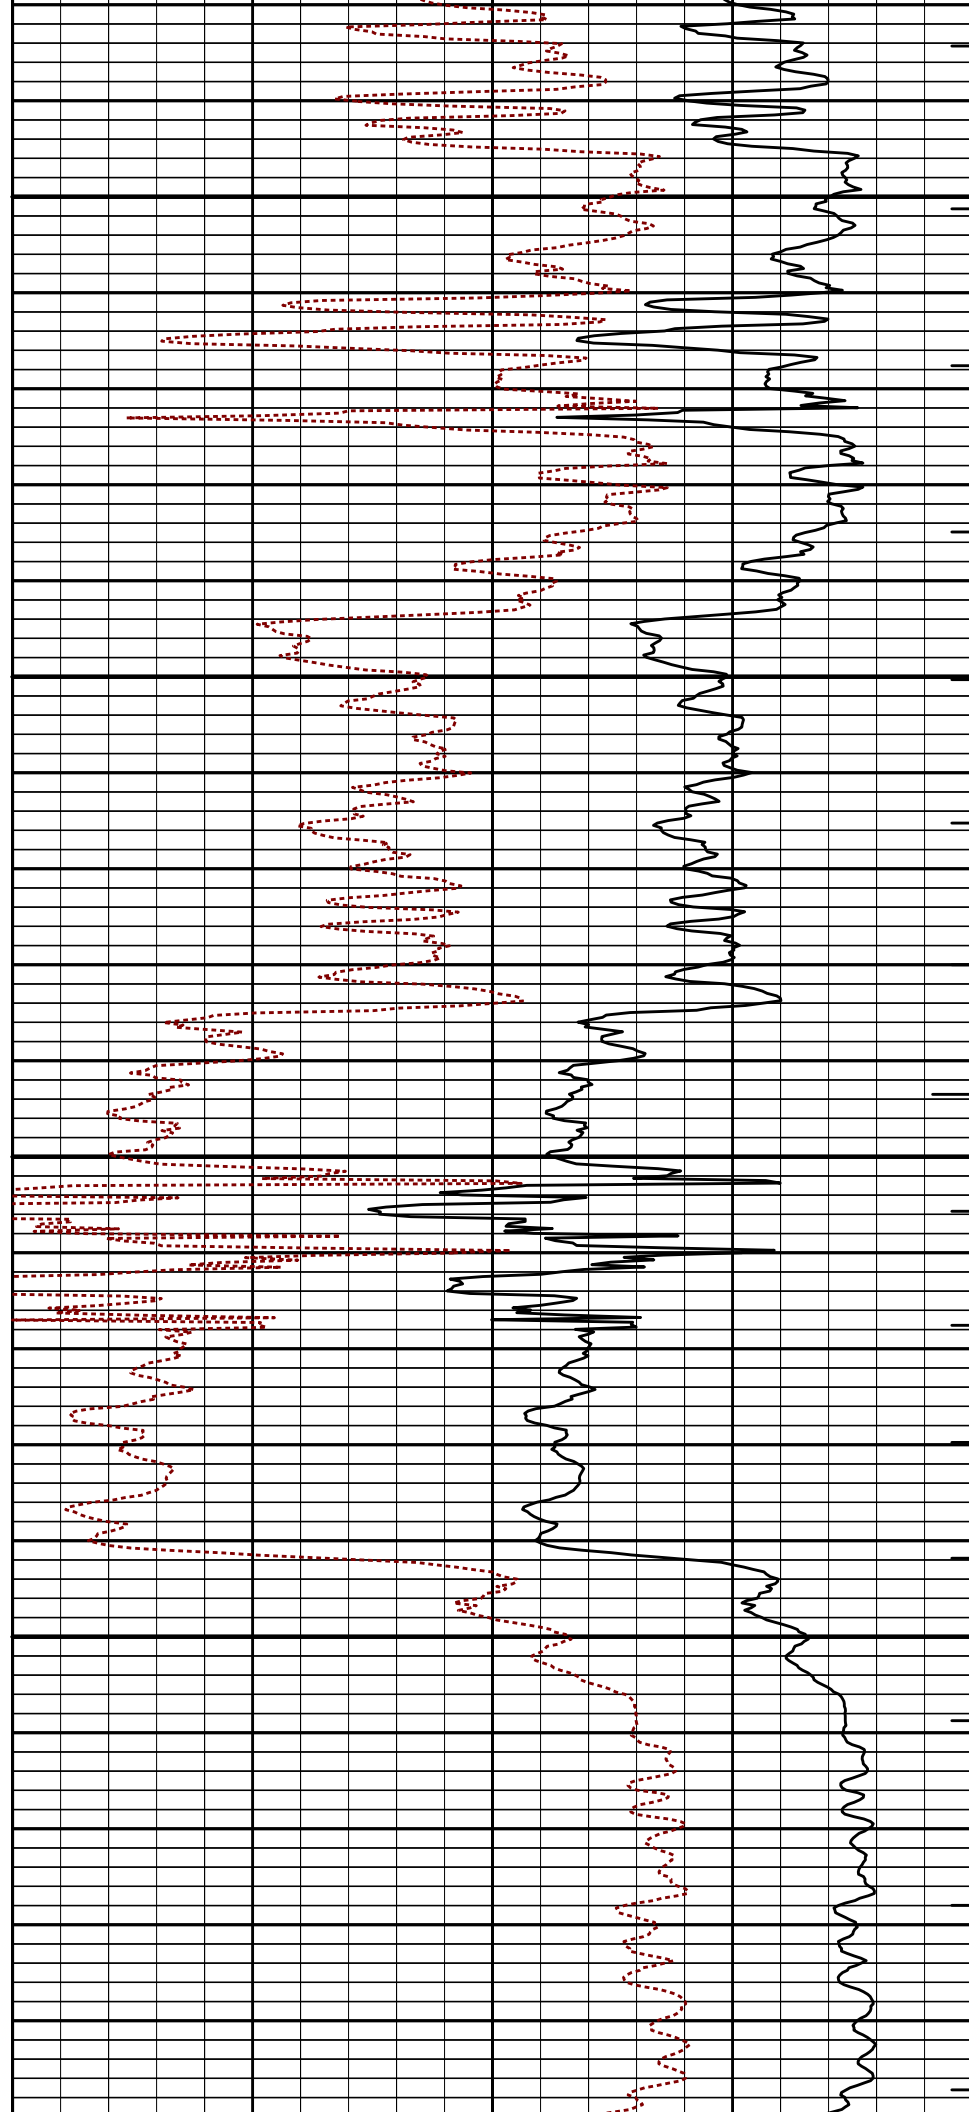

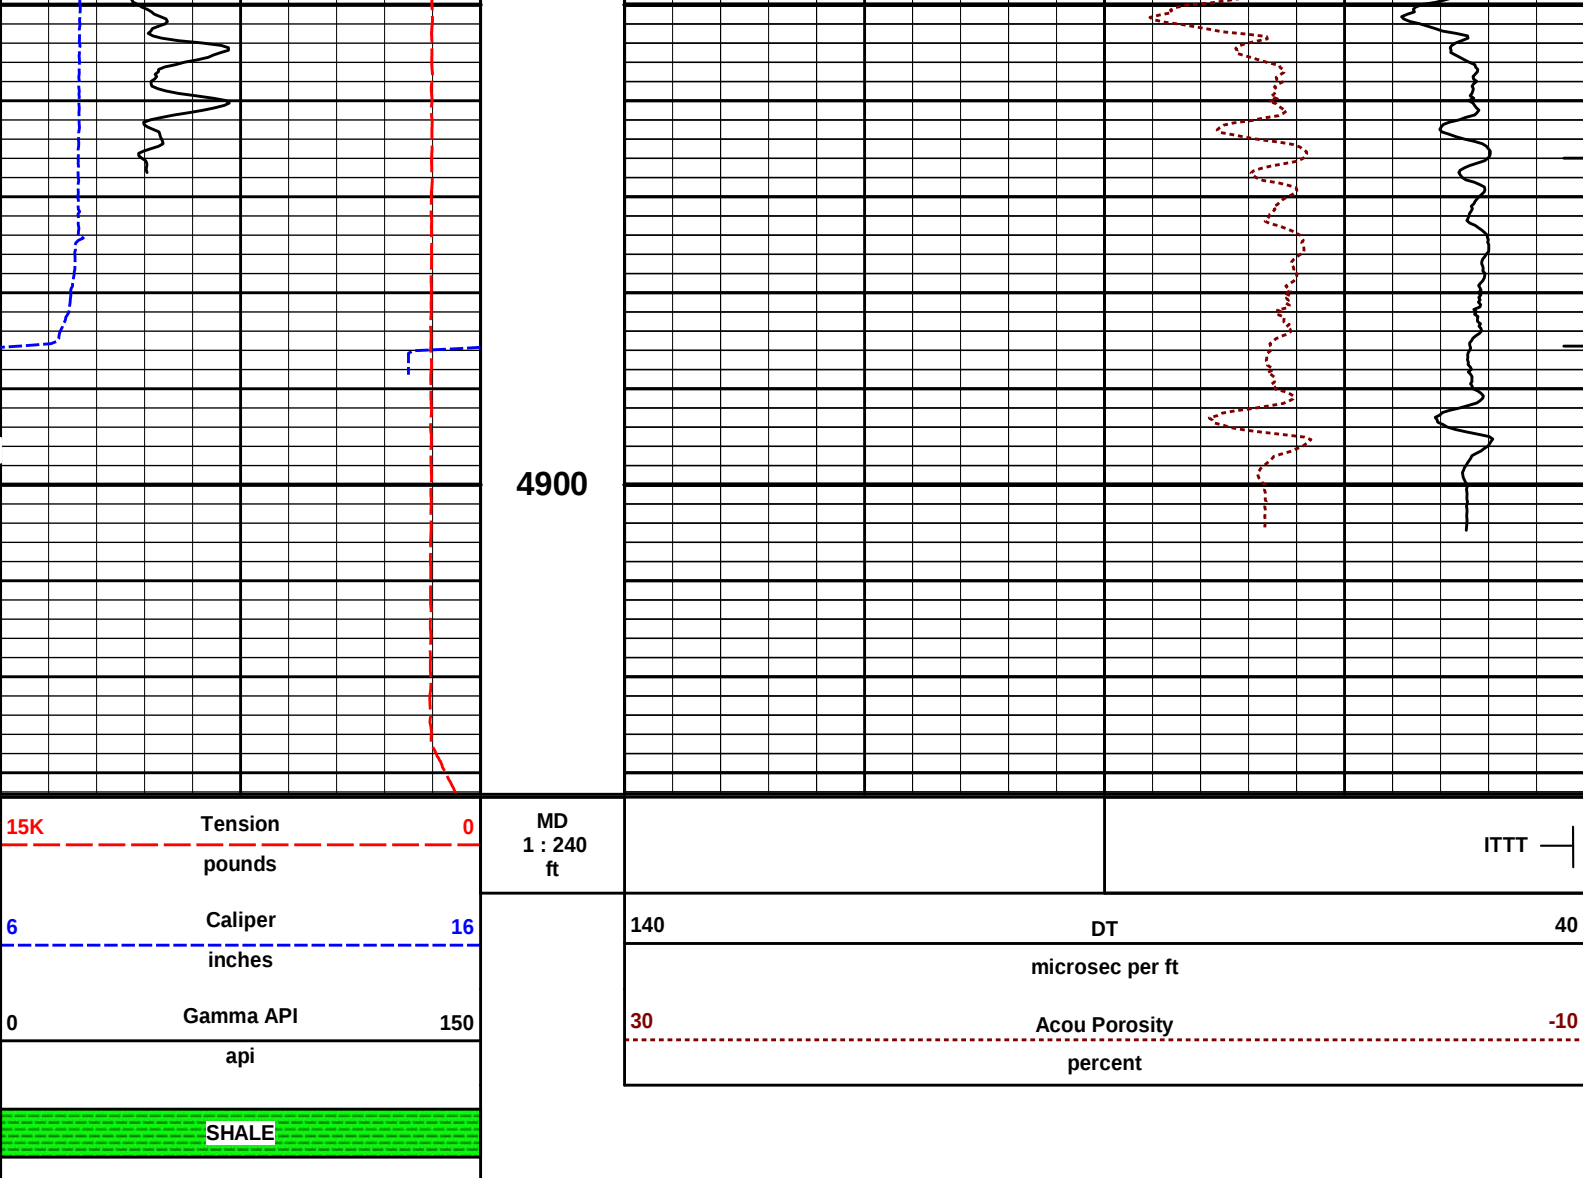

HALLIBURTON

Plot Time: 20-Aug-14 18:58:12
 Plot Range: 4400 ft to 4932.25 ft
 Data: LENA_MAI_3-29\Well Based\REPEAT\
 Plot File: \\BSAT\BSAT_5_REP_LIB

REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
RWCH-12156658 135.00 lbs		Ø 3.625 in →		← Load Cell @ 76.35 ft ← BH Temperature @ 75.79 ft	6.25 ft	80.04 ft
SP Sub-12345678 60.00 lbs		Ø 3.625 in →		← SP @ 72.01 ft	3.74 ft	73.79 ft
						70.05 ft

GTET-11048627
165.00 lbs

Ø 3.625 in →

← GammaRay @ 63.99 ft

8.52 ft

61.53 ft

DSNT-11055304
174.00 lbs

Ø 3.625 in →

← DSN Far @ 54.59 ft
← DSN Near @ 53.84 ft

9.69 ft

51.84 ft

SDLT-11014296
360.00 lbs

SDLT Pad-10865884
65.00 lbs
Microlog Pad-11014296
8.00 lbs

Ø 4.500 in →

Ø 4.750 in* →

Ø 4.750 in* →

Microlog @ 44.03 ft
SDL Caliper @ 43.84 ft
SDL @ 43.83 ft

10.81 ft

41.03 ft

IQ Flex-00000001
140.00 lbs

Ø 3.625 in →

5.67 ft

35.36 ft

BSAT-10747683
300.00 lbs

Ø 3.625 in →

← Sonic Receivers @ 26.84 ft


15.77 ft

19.58 ft

ACRt Instrument-
11022962
50.00 lbs

Ø 3.625 in →

5.03 ft

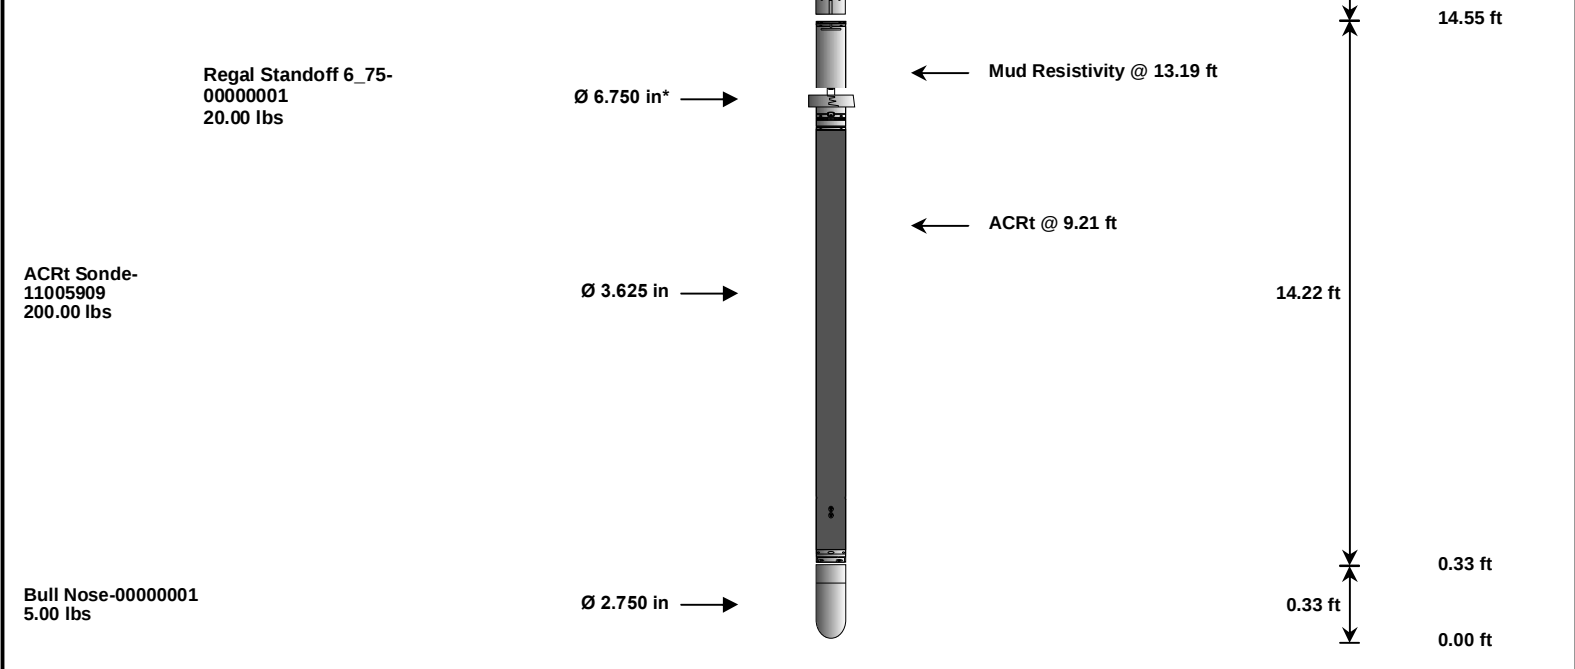

Mnemonic		Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
RWCH	Releasable Wireline Cable Head		12156658	135.00	6.25	73.79	300.00
SP	SP Sub		12345678	60.00	3.74	70.05	300.00
GTET	Gamma Telemetry Tool		11048627	165.00	8.52	61.53	60.00
DSNT	Dual Spaced Neutron		11055304	174.00	9.69	51.84	60.00
SDLT	Spectral Density Tool		11014296	360.00	10.81	41.03	60.00
SDLP	Density Insite Pad		10865884	65.00	2.55	*	43.24
MICP	Microlog Pad		11014296	8.00	1.00	*	43.53
IQF	IQ Flex tool		00000001	140.00	5.67	35.36	300.00
BSAT	Borehole Sonic Array Tool		10747683	300.00	15.77	19.58	60.00
ACRt	Array Compensated True Resistivity Instrument Section		11022962	50.00	5.03	14.55	120.00
ACRt	Array Compensated True Resistivity Sonde Section		11005909	200.00	14.22	0.33	120.00
RSOF	Regal Standoff 6.75in		00000001	20.00	0.52	*	12.25
BLNS	Bull Nose		00000001	5.00	0.33	0.00	300.00
Total				1,682.00	80.04		
* Not included in Total Length and Length Accumulation.							
Data: LENA_MAI_3-29\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIDLE						Date: 20-Aug-14 16:29:50	

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Natural	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in

SHARED	ST	Surface Temperature	75.0	degF
SHARED	TD	Total Well Depth	4930.00	ft
SHARED	BHT	Bottom Hole Temperature	200.0	degF
SHARED	SVTM	Navigation and Survey Master Tool	NONE	
SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
SHARED	TEMM	Temperature Master Tool	NONE	
Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
Rwa / CrossPlot	BHSM	Borehole Size Source Tool	SDLT	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GRSO	Gamma Tool Standoff	0.000	in
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
GTET	BHSM	Borehole Size Source Tool	SDLT	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	BHSM	Borehole Size Source Tool	SDLT	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	User define	
BSAT	DTMA	Delta -T Matrix	47.60	uspf
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	ED Lwr & ED Up	

ACRt Sonde	TCSI	Temperature Correction Source	FP Lwr & FP Up	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	SDLT	
BOTTOM				
Data: LENA_MAI_3-29I0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIDLE			Date: 20-Aug-14 16:30:39	

HALLIBURTON INPUTS, DELAYS AND FILTERS TABLE				
Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
Rwa / CrossPlot				
TPUL	Tension Pull	80.04	NO	
BS	Bit Size	80.04	NO	
HDIA	Measured Hole Diameter	0.00	NO	
RWCH				
DHTN	DownholeTension	0.00	BLK	0.000
SP Sub				
PLTC	Plot Control Mask	72.01	NO	
SP	Spontaneous Potential	72.01	BLK	1.250
SPR	Raw Spontaneous Potential	72.01	NO	
SPO	Spontaneous Potential Offset	72.01	NO	
GTET				
TPUL	Tension Pull	63.99	NO	
GR	Natural Gamma Ray API	63.99	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	63.99	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	63.99	W	1.416 , 0.750
HDIA	Measured Hole Diameter	0.00	NO	
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				
TPUL	Tension Pull	53.74	NO	
RNDS	Near Detector Telemetry Counts	53.84	BLK	1.417
RFDS	Far Detector Telemetry Counts	54.59	TRI	0.583
DNTT	DSN Tool Temperature	53.84	NO	
DSNS	DSN Tool Status	53.74	NO	
ERND	Near Detector Telemetry Counts EVR	53.84	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	54.59	BLK	0.000
ENTM	DSN Tool Temperature EVR	53.84	NO	
HDIA	Measured Hole Diameter	0.00	NO	
SDLT				
TPUL	Tension Pull	43.84	NO	

TPUL	Tension Pull	43.84	NO	
PCAL	Pad Caliper	43.84	TRI	0.250
ACAL	Arm Caliper	43.84	TRI	0.250
BSAT				
TPUL	Tension Pull	26.84	NO	
STAT	Status	26.84	NO	
DLYT	Delay Time	26.84	NO	
SI	Sample Interval	26.84	NO	
TXRX	Raw Telemetry 10 Receivers	26.84	NO	
FRMC	Tool Frame Count	26.84	NO	
GMOD	Gain processing mode	19.58	NO	
ACRt Sonde				
TPUL	Tension Pull	2.73	NO	
F1R1	ACRT 12KHz - 80in R value	8.98	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	8.98	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.48	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.48	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	4.98	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	4.98	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	3.98	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	3.98	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.48	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.48	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.23	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.23	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	8.98	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	8.98	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.48	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.48	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	4.98	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	4.98	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	3.98	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	3.98	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.48	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.48	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.23	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.23	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	8.98	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	8.98	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.48	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.48	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	4.98	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	4.98	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	3.98	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	3.98	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.48	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.48	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.23	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.23	BLK	0.000
RMUD	Mud Resistivity	12.52	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.73	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.73	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.73	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.73	BLK	0.000

F3RT	Transmitter Reference 72 KHz Real Signal	2.73	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.73	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.73	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.73	BLK	0.000
ITMP	Instrument Temperature	2.73	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.73	NO	
TIDV	Instrument Temperature Derivative	2.73	NO	
TUDV	Upper Temperature Derivative	2.73	NO	
TLDV	Lower Temperature Derivative	2.73	NO	
TRBD	Receiver Board Temperature	2.73	NO	
HDIA	Measured Hole Diameter	0.00	NO	

SDLT Pad				
TPUL	Tension Pull	43.83	NO	
NAB	Near Above	43.66	BLK	0.920
NHI	Near Cesium High	43.66	BLK	0.920
NLO	Near Cesium Low	43.66	BLK	0.920
NVA	Near Valley	43.66	BLK	0.920
NBA	Near Barite	43.66	BLK	0.920
NDE	Near Density	43.66	BLK	0.920
NPK	Near Peak	43.66	BLK	0.920
NLI	Near Lithology	43.66	BLK	0.920
NBAU	Near Barite Unfiltered	43.66	BLK	0.250
NLIU	Near Lithology Unfiltered	43.66	BLK	0.250
FAB	Far Above	44.01	BLK	0.250
FHI	Far Cesium High	44.01	BLK	0.250
FLO	Far Cesium Low	44.01	BLK	0.250
FVA	Far Valley	44.01	BLK	0.250
FBA	Far Barite	44.01	BLK	0.250
FDE	Far Density	44.01	BLK	0.250
FPK	Far Peak	44.01	BLK	0.250
FLI	Far Lithology	44.01	BLK	0.250
PTMP	Pad Temperature	43.84	BLK	0.920
NHV	Near Detector High Voltage	43.24	NO	
FHV	Far Detector High Voltage	43.24	NO	
ITMP	Instrument Temperature	43.24	NO	
DDHV	Detector High Voltage	43.24	NO	
HDIA	Measured Hole Diameter	0.00	NO	

Microlog Pad				
TPUL	Tension Pull	44.03	NO	
MINV	Microlog Lateral	44.03	BLK	0.750
MNOR	Microlog Normal	44.03	BLK	0.750

Data: LENA_MAI_3-29\0001 SP-GTET-DSN-SDL-FLEX-BSAT-ACRT-BNIDLE Date: 20-Aug-14 16:30:21

COMPANY	BEREXCO LLC		
WELL	LENA MAI 3-29		
FIELD	CONGDON NORTH		
COUNTY	FINNEY	STATE	KANSAS
HALLIBURTON		BOREHOLE COMPENSATED SONIC ARRAY LOG	

	ESS
--	-----