

HALLIBURTON

ARRAY RESISTIVITY SPECTRAL DENSITY DUAL SPACED NEUTRON SONIC QUAD COMBO LOG

COMPANY	MERIT ENERGY COMPANY		
WELL	HMU 207W		
FIELD/BLOCK	REDWOOD		
COUNTY	FINNEY		
STATE	KANSAS		
Permanent Datum	GL	Elev: 2984.0 ft	
Log measured from	KB	12.0 ft above perm. Datum	
Drilling measured from	KB		
Date	19-Dec-17		
Run No.	1		
Depth - Driller	5000.0 ft		
Depth - Logger	5011.0 ft		
Bottom - Logged Interval	5001		
Top - Logged Interval	3300		
Casing - Driller	8.625 in	@ 1831.0 ft	
Casing - Logger	1831.0 ft		
Bit Size	7.875 in	@	
Type Fluid in Hole	Water Based Mud		
Density	9.10 g/cc	65.00 s/qt	
PH	11.50 pH	6.4 cphm	
Source of Sample	FLOWLINE		
Rm @ Meas. Temperature	0.93 ohmm	@ 78.00 degF	
Rmf @ Meas. Temperature	0.74 ohmm	@ 75.00 degF	
Rmc @ Meas. Temperature	1.14 ohmm	@ 75.00 degF	
Source Rmf	Rmc	MEAS	
Rm @ BHT	0.60 ohmm	@ 125.0 degF	
Time Since Circulation	09:00 hr		
Time on Bottom	19-Dec-17 11:14		
Max. Rec. Temperature	125.00 degF	@ 5011.0 ft	
Equipment Location	12156883	EL RENO	
Recorded By	WHITLOCK		
Witnessed By	MARTIN LANGE		
		AUSTIN GARDNER	

API No. 15-055-22474-00-00
Location (SHL) SW SW SW NW 2361' FNL & 154' FWL
Sect. 30 Twp. 23S Rge. 34W
Other Services: ACRT, SDL-DSN, MICLOG, BSAT
Elev.: K.B. 2996.0 ft, D.F. 2994.0 ft, G.L. 2984.0 ft

Fold here

Service Ticket No.: 904514721				API No.: 15-055-22474-00-00				PGM Version: WL INSITE R5.6.3 (Build 4)											
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE								RESISTIVITY SCALE CHANGES											
Date	Sample No.					Type Log	Depth	Scale Up Hole	Scale Down Hole										
Depth-Driller																			
Type Fluid in Hole																			
Density	Viscosity																		
Ph	Fluid Loss																		
Source of Sample								RESISTIVITY EQUIPMENT DATA											
Rm @ Meas. Temp		@		@		Run No.	Tool Type & No.	Pad Type	Tool Pos.	Other									
Rmf @ Meas. Temp.		@		@															
Rmc @ Meas. Temp.		@		@															
Source Rmf	Rmc																		
Rm @ BHT		@		@															
Rmf @ BHT		@		@															
Rmc @ BHT		@		@															
EQUIPMENT DATA																			
GAMMA				ACOUSTIC				DENSITY				NEUTRON							
Run No.				Run No.				Run No.				Run No.							
Serial No.				Serial No.				Serial No.				Serial No.							
Model No.				Model No.				Model No.				Model No.							
Diameter				No. of Cent.				Diameter				Diameter							
Detector Model No.				Spacing				Log Type				Log Type							
Type								Source Type				Source Type							
Length				LSA [Y/N]				Serial No.				Serial No.							
Distance to Source				FWDA [Y/N]				Strength				Strength							
LOGGING DATA																			
GENERAL				GAMMA				ACOUSTIC				DENSITY				NEUTRON			
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix					
No.	From	To	ft/min	L	R	L	R		L	R		L	R						

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks: 5 1/2" CASING USED FOR ANNULAR HOLE VOLUME

HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.

HALLIBURTON

HALLIBURTON


Plot Time: 19-Dec-17 15:26:07


Plot Range: 3300 ft to 5014.75 ft


Data: MERIT_HUM_207WWell Based\


Plot File: \\QUADACRT-SDL-DSN-ML-BSAT


5 INCH MAIN LOG

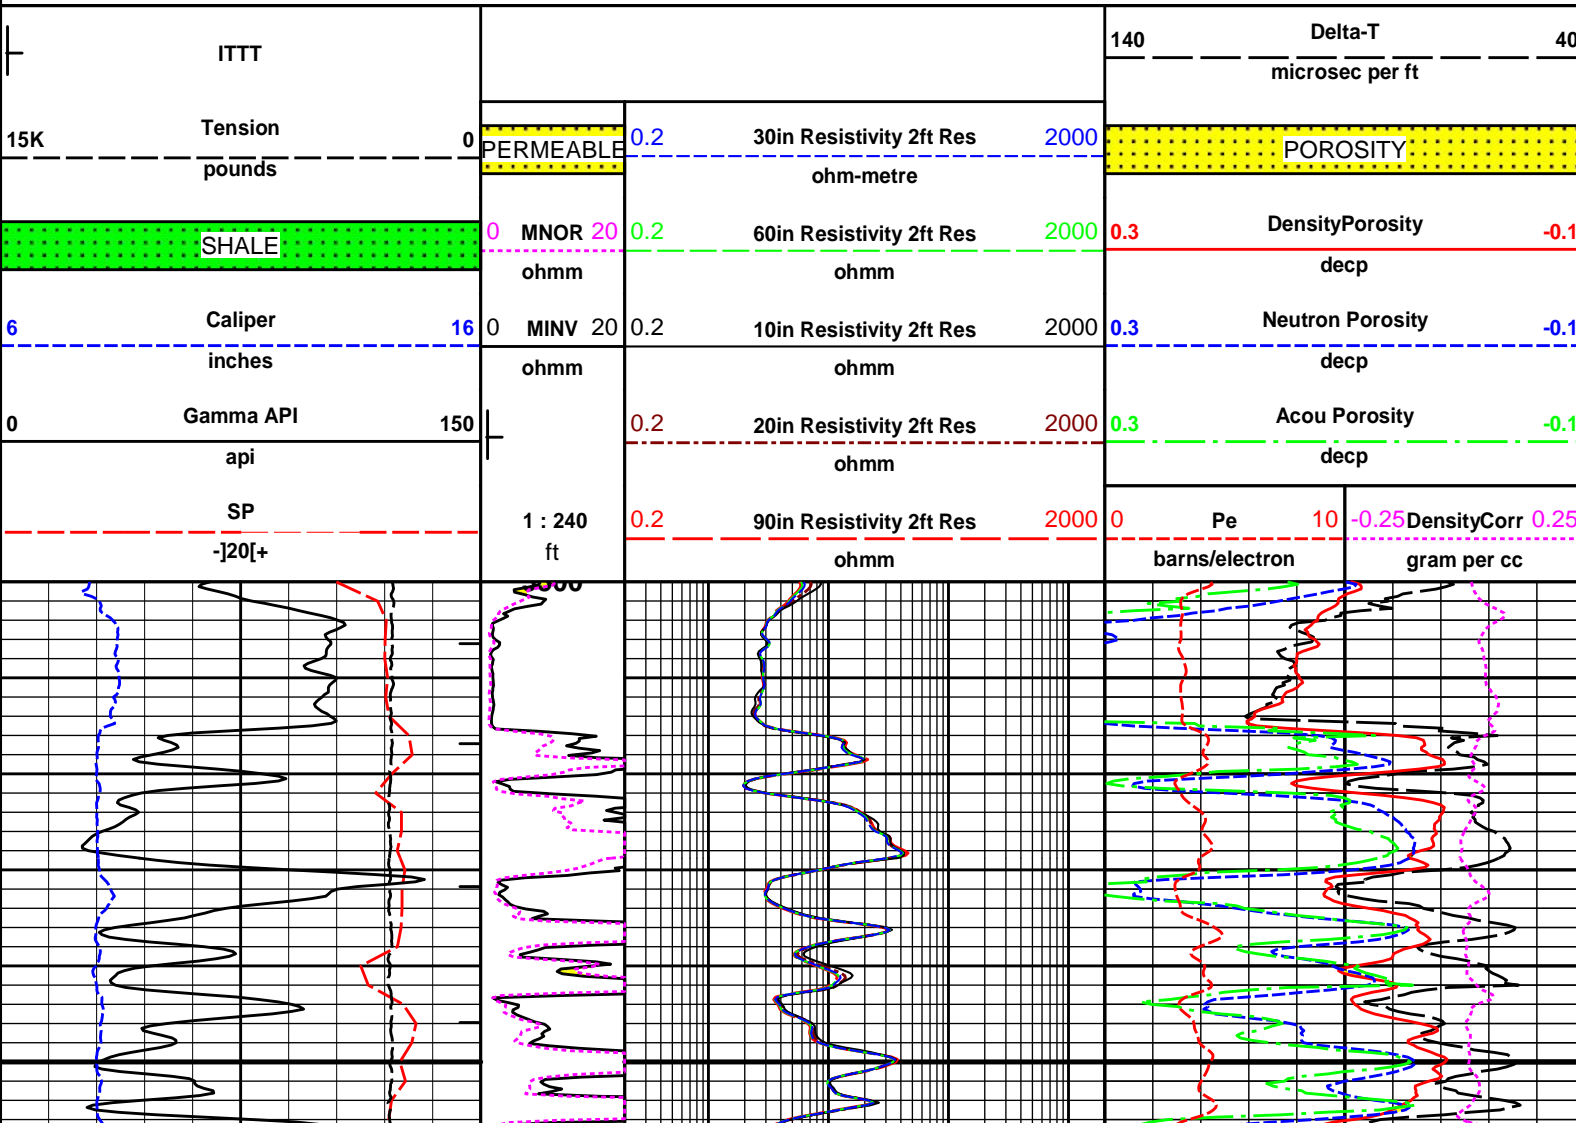


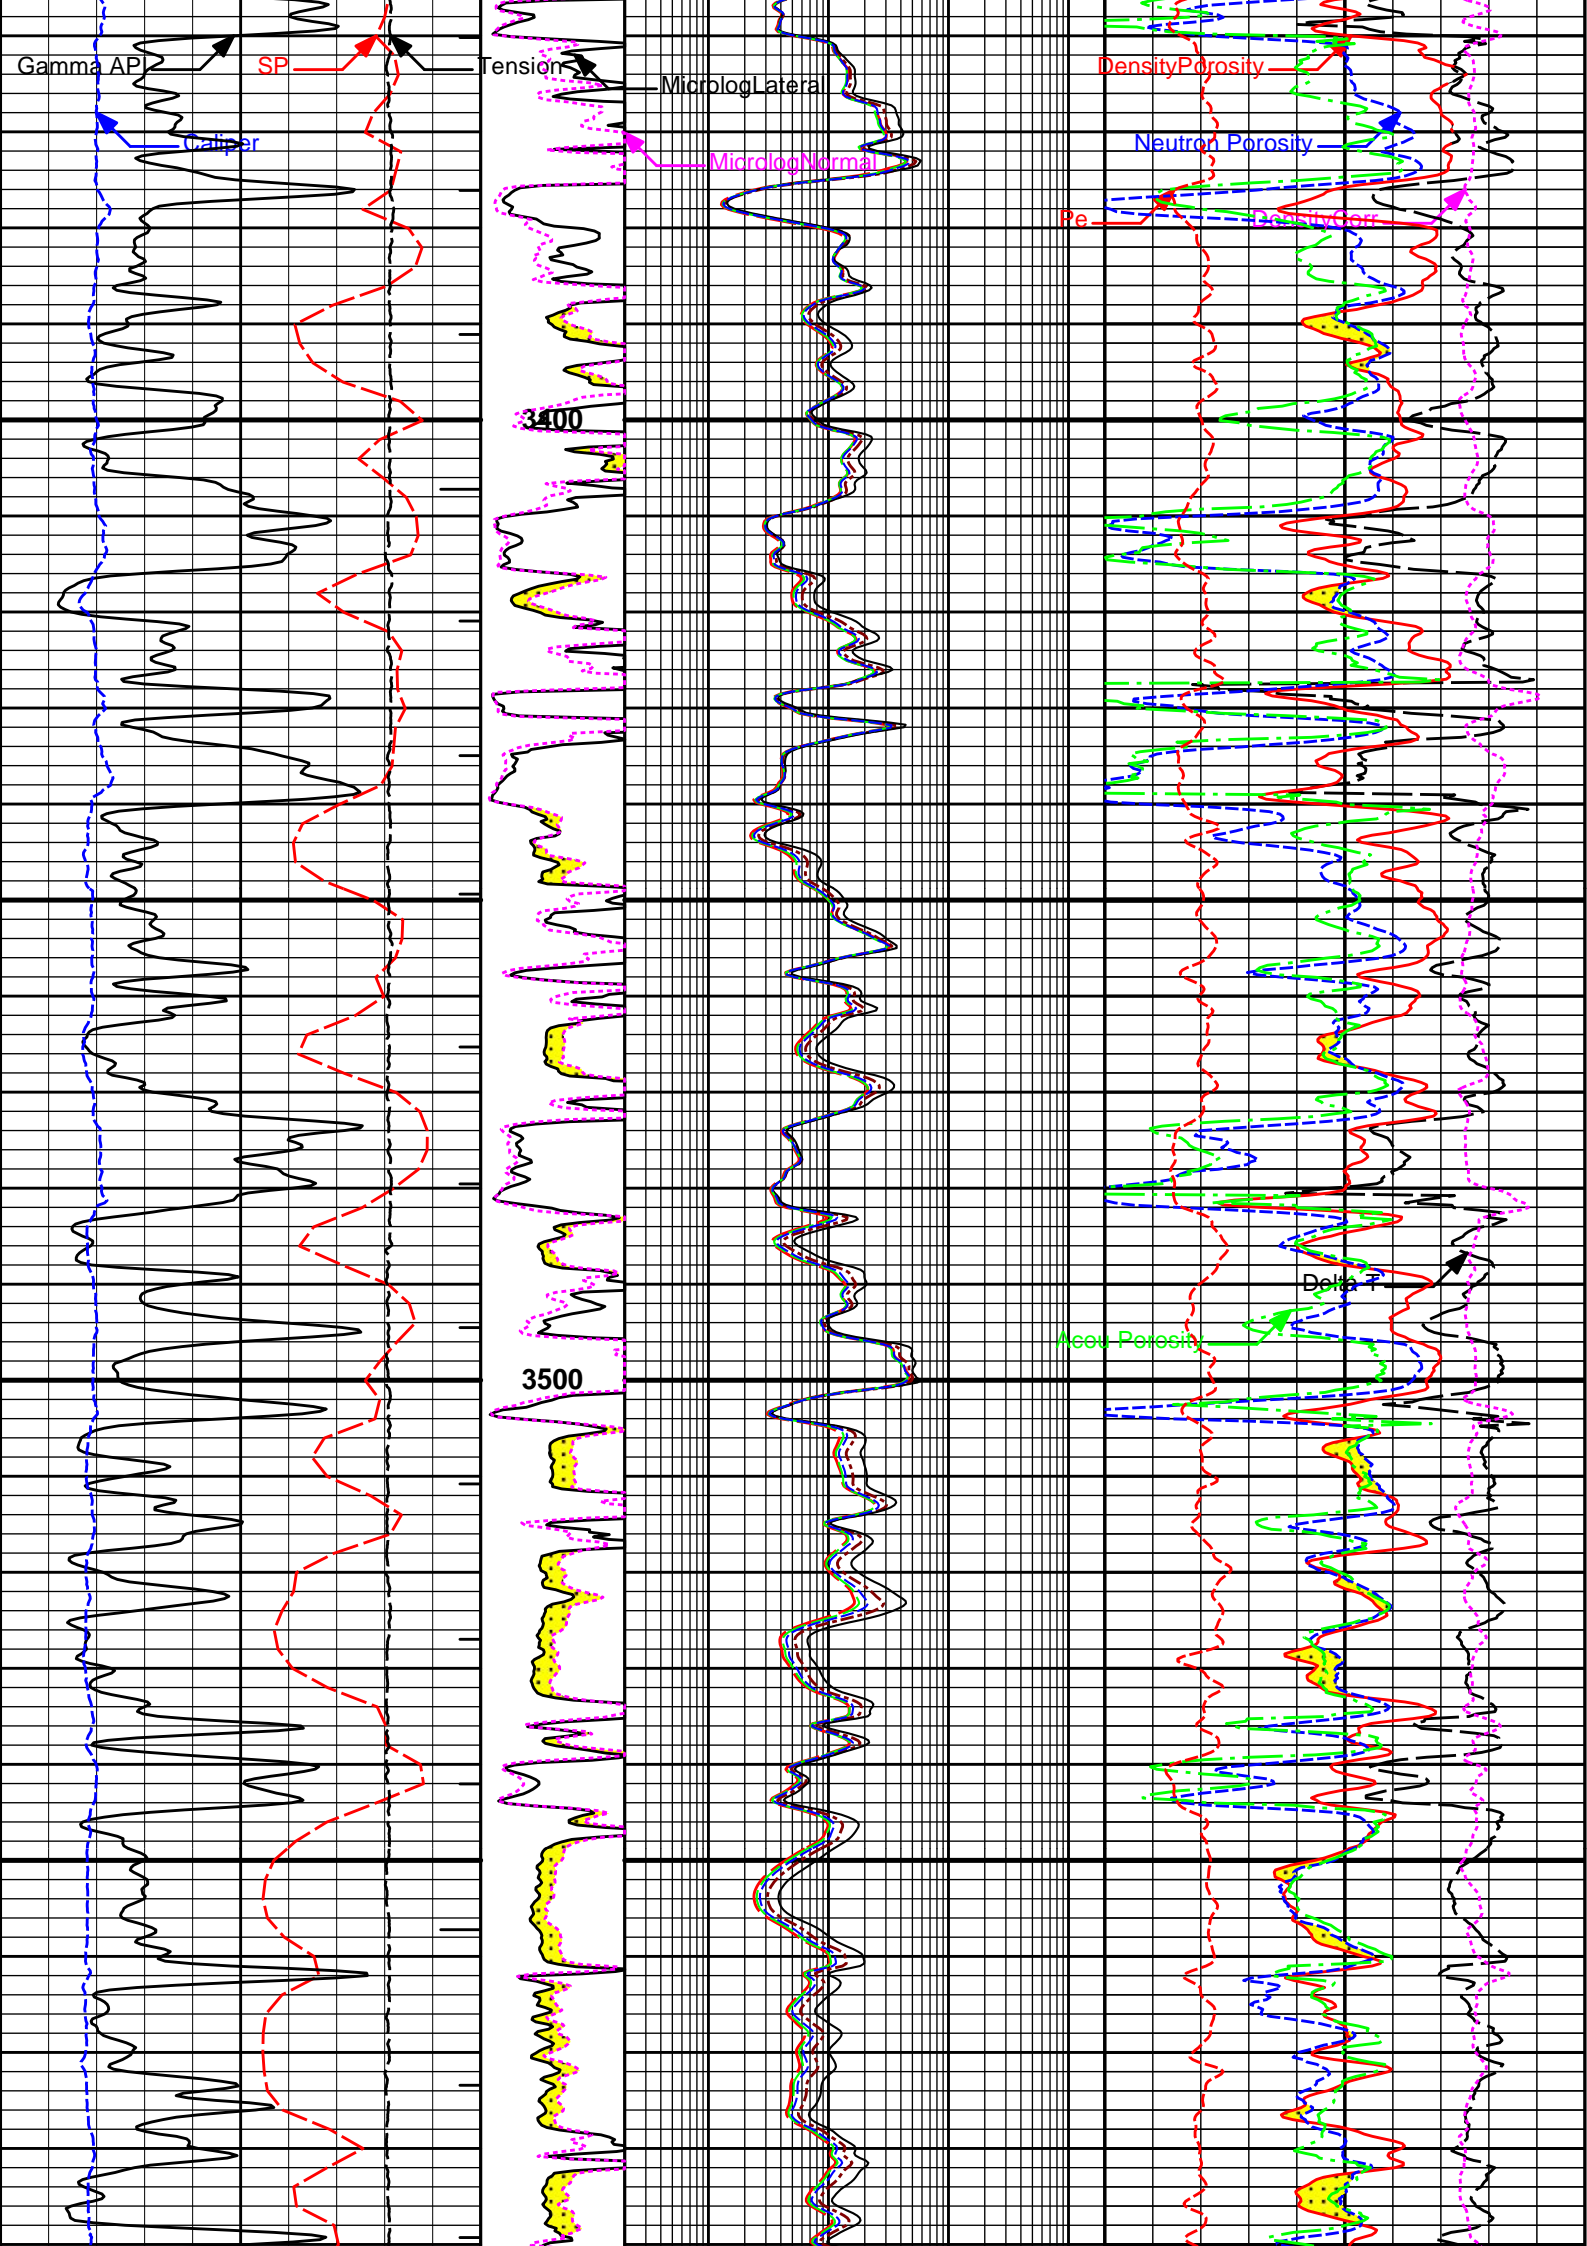


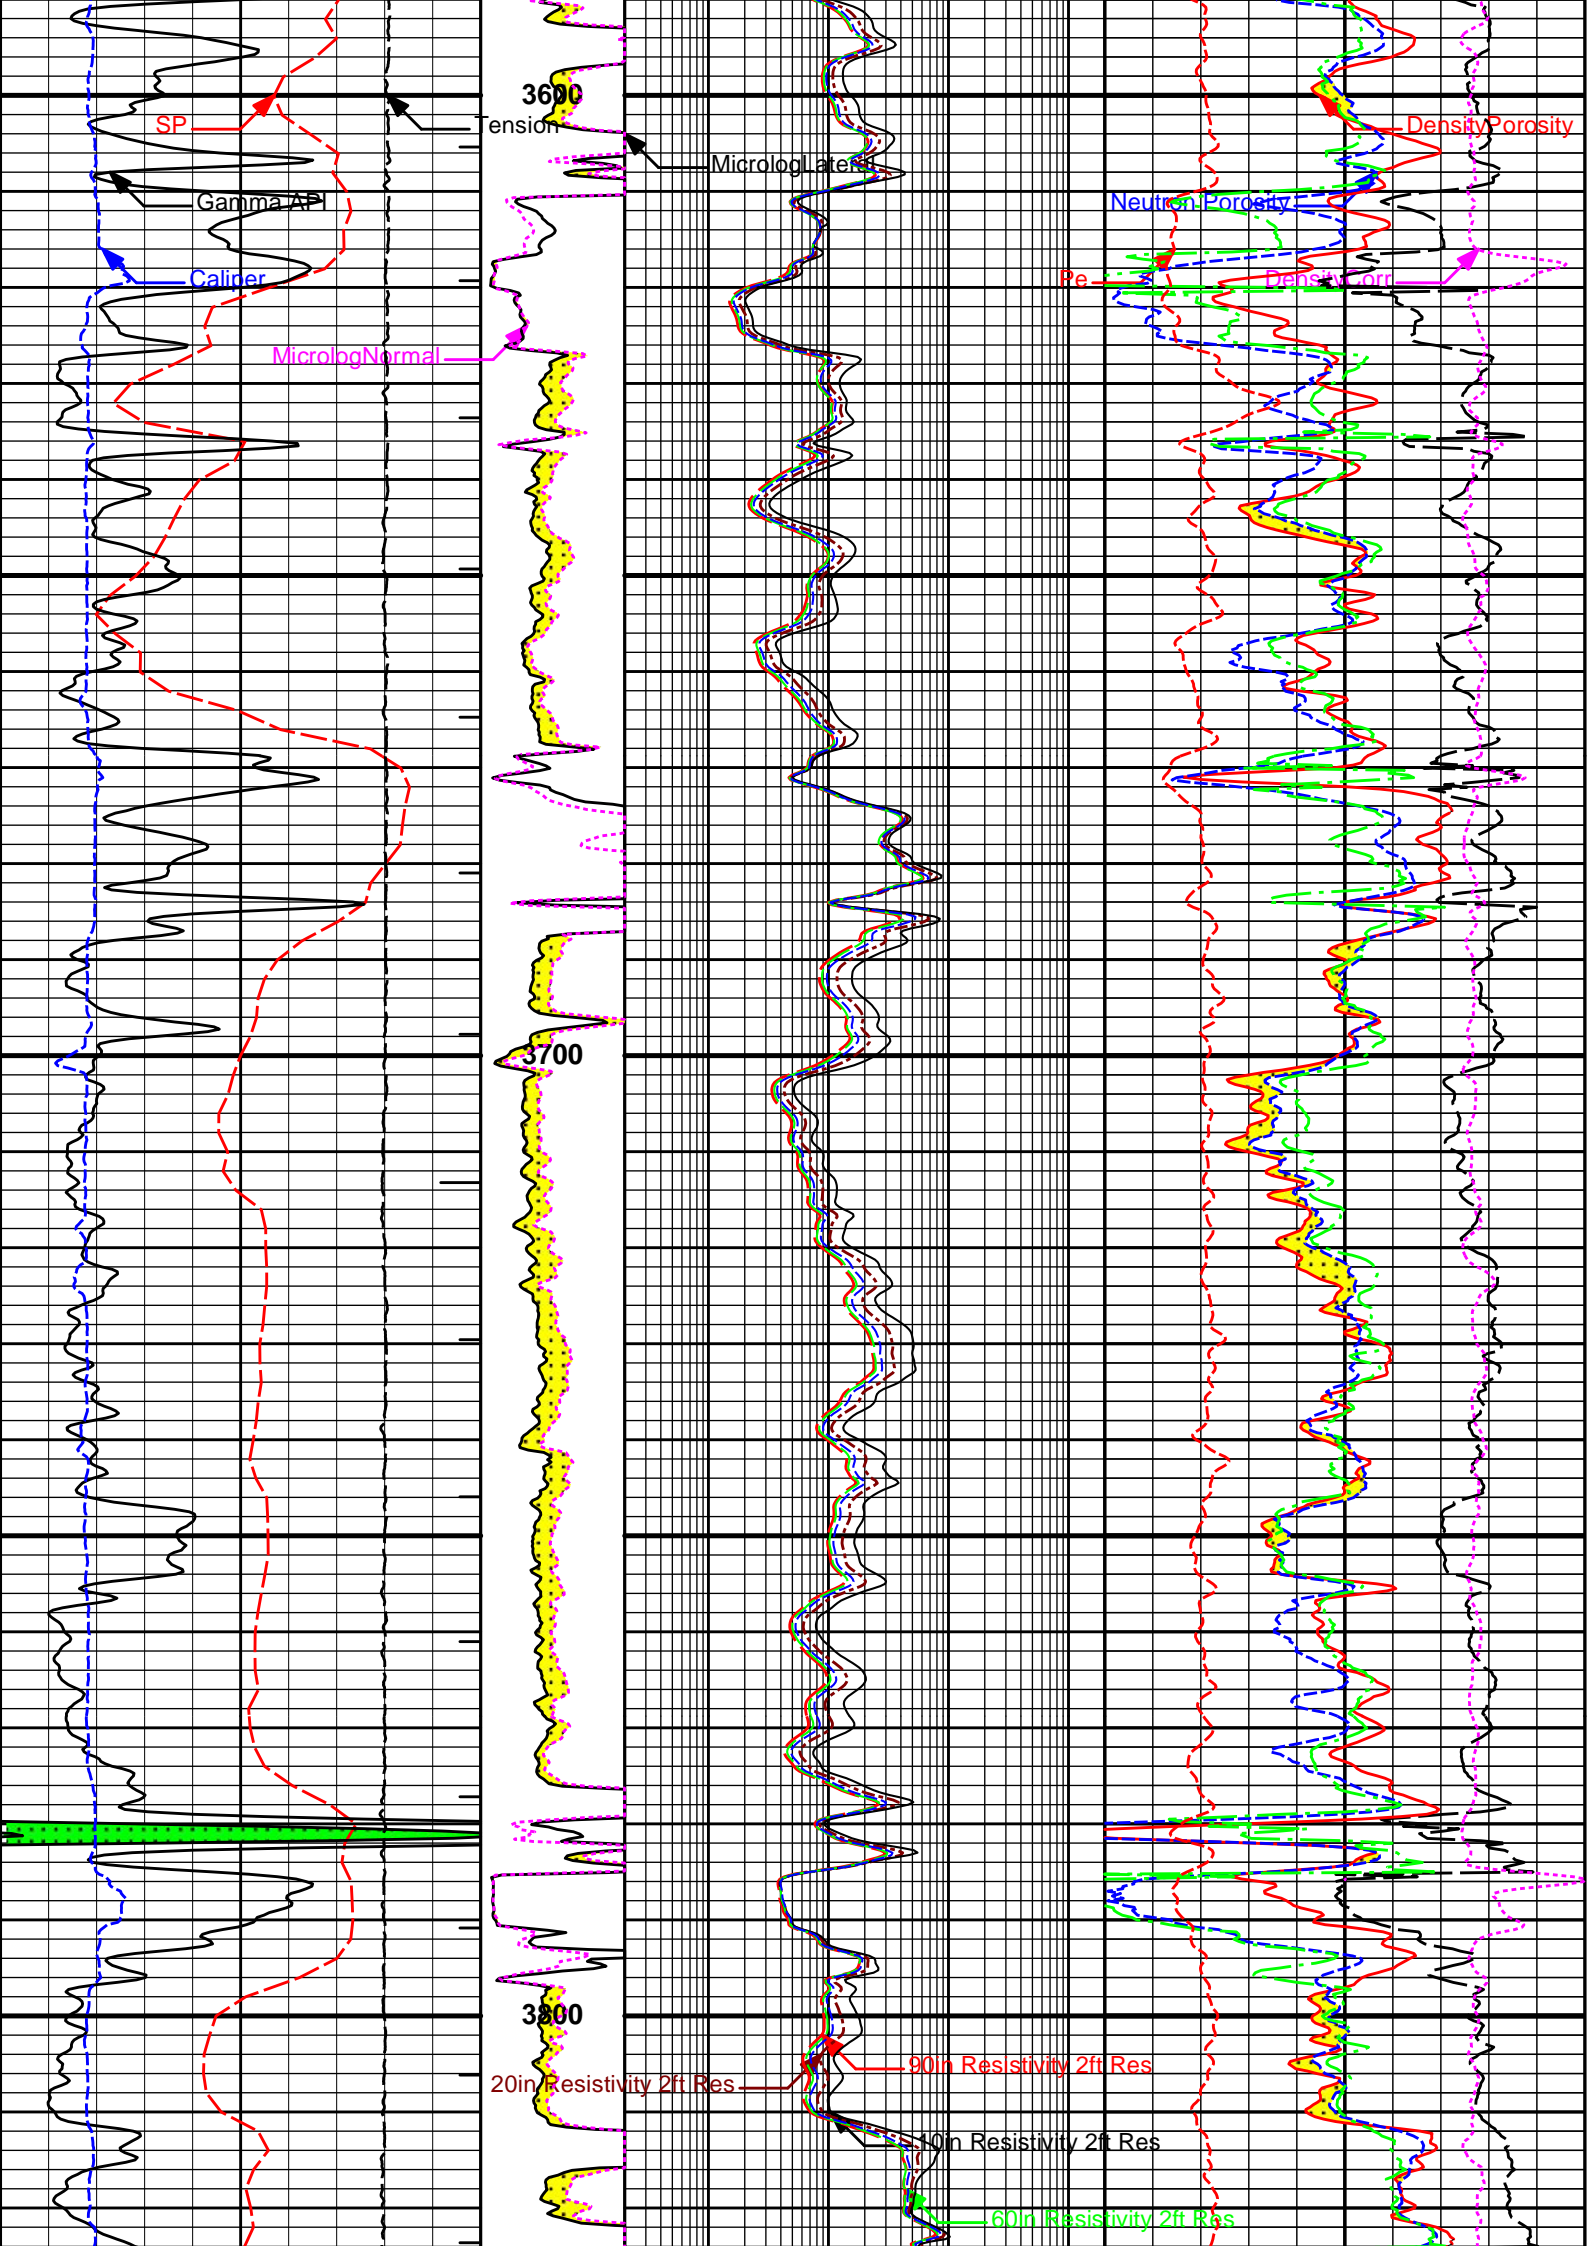


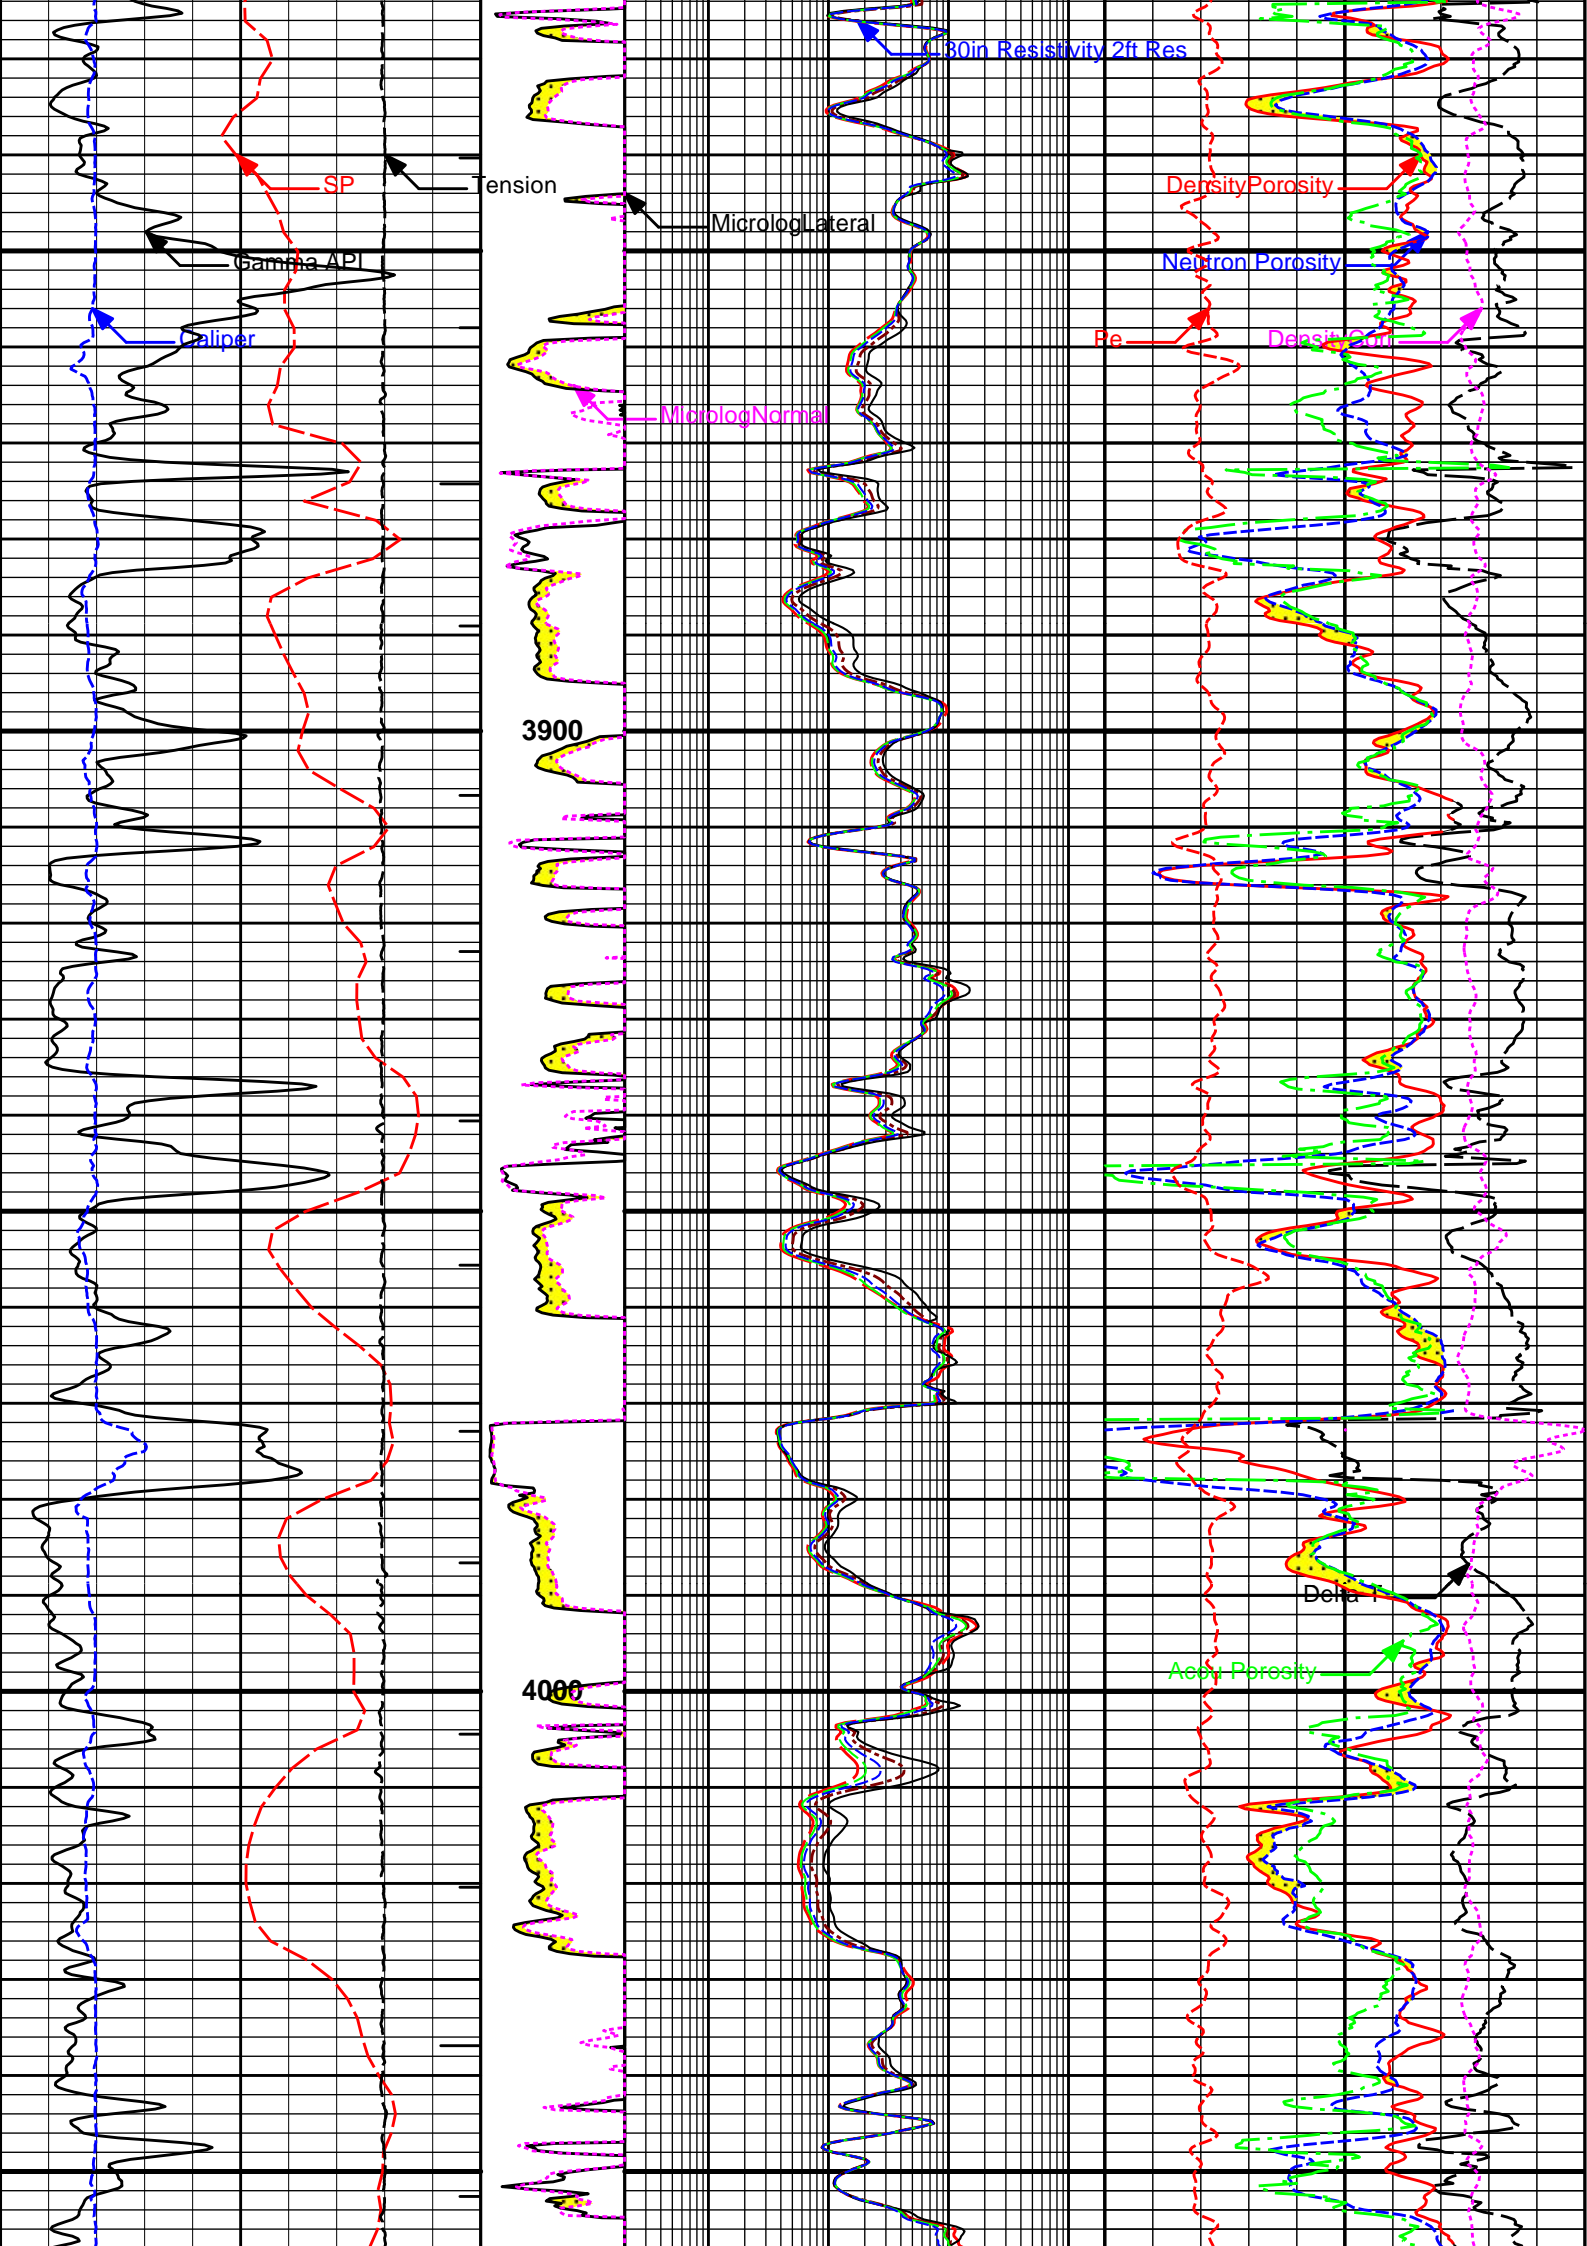


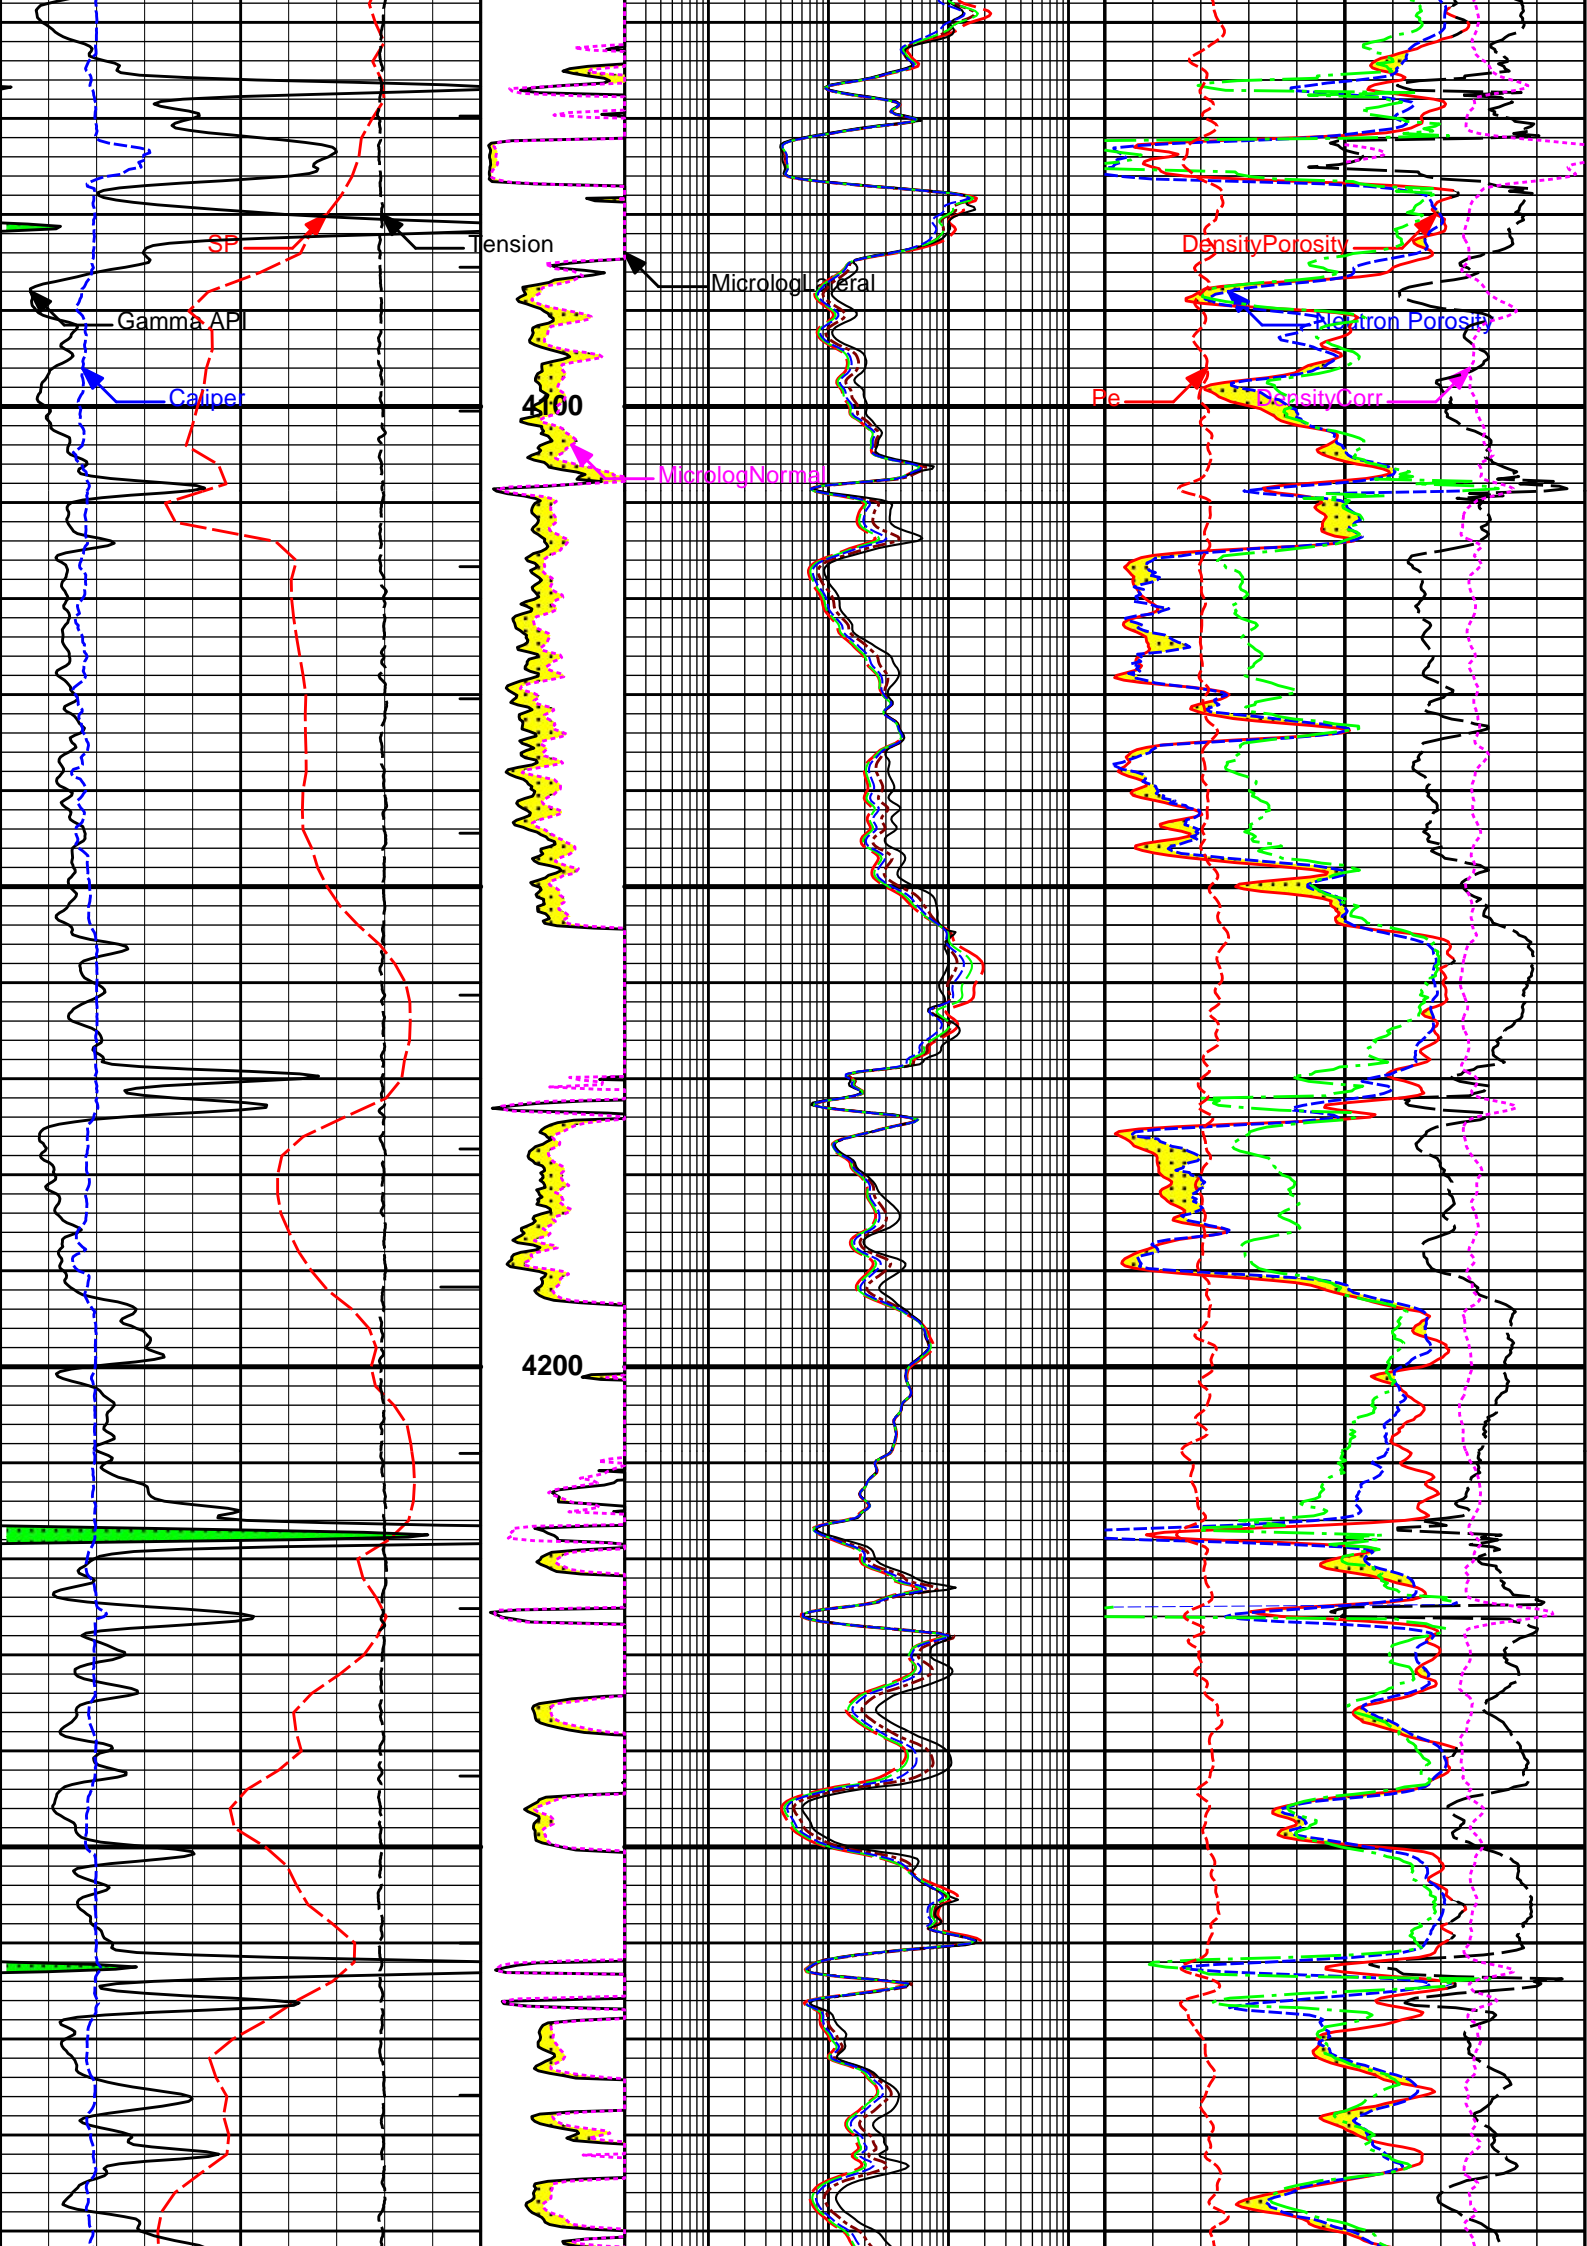

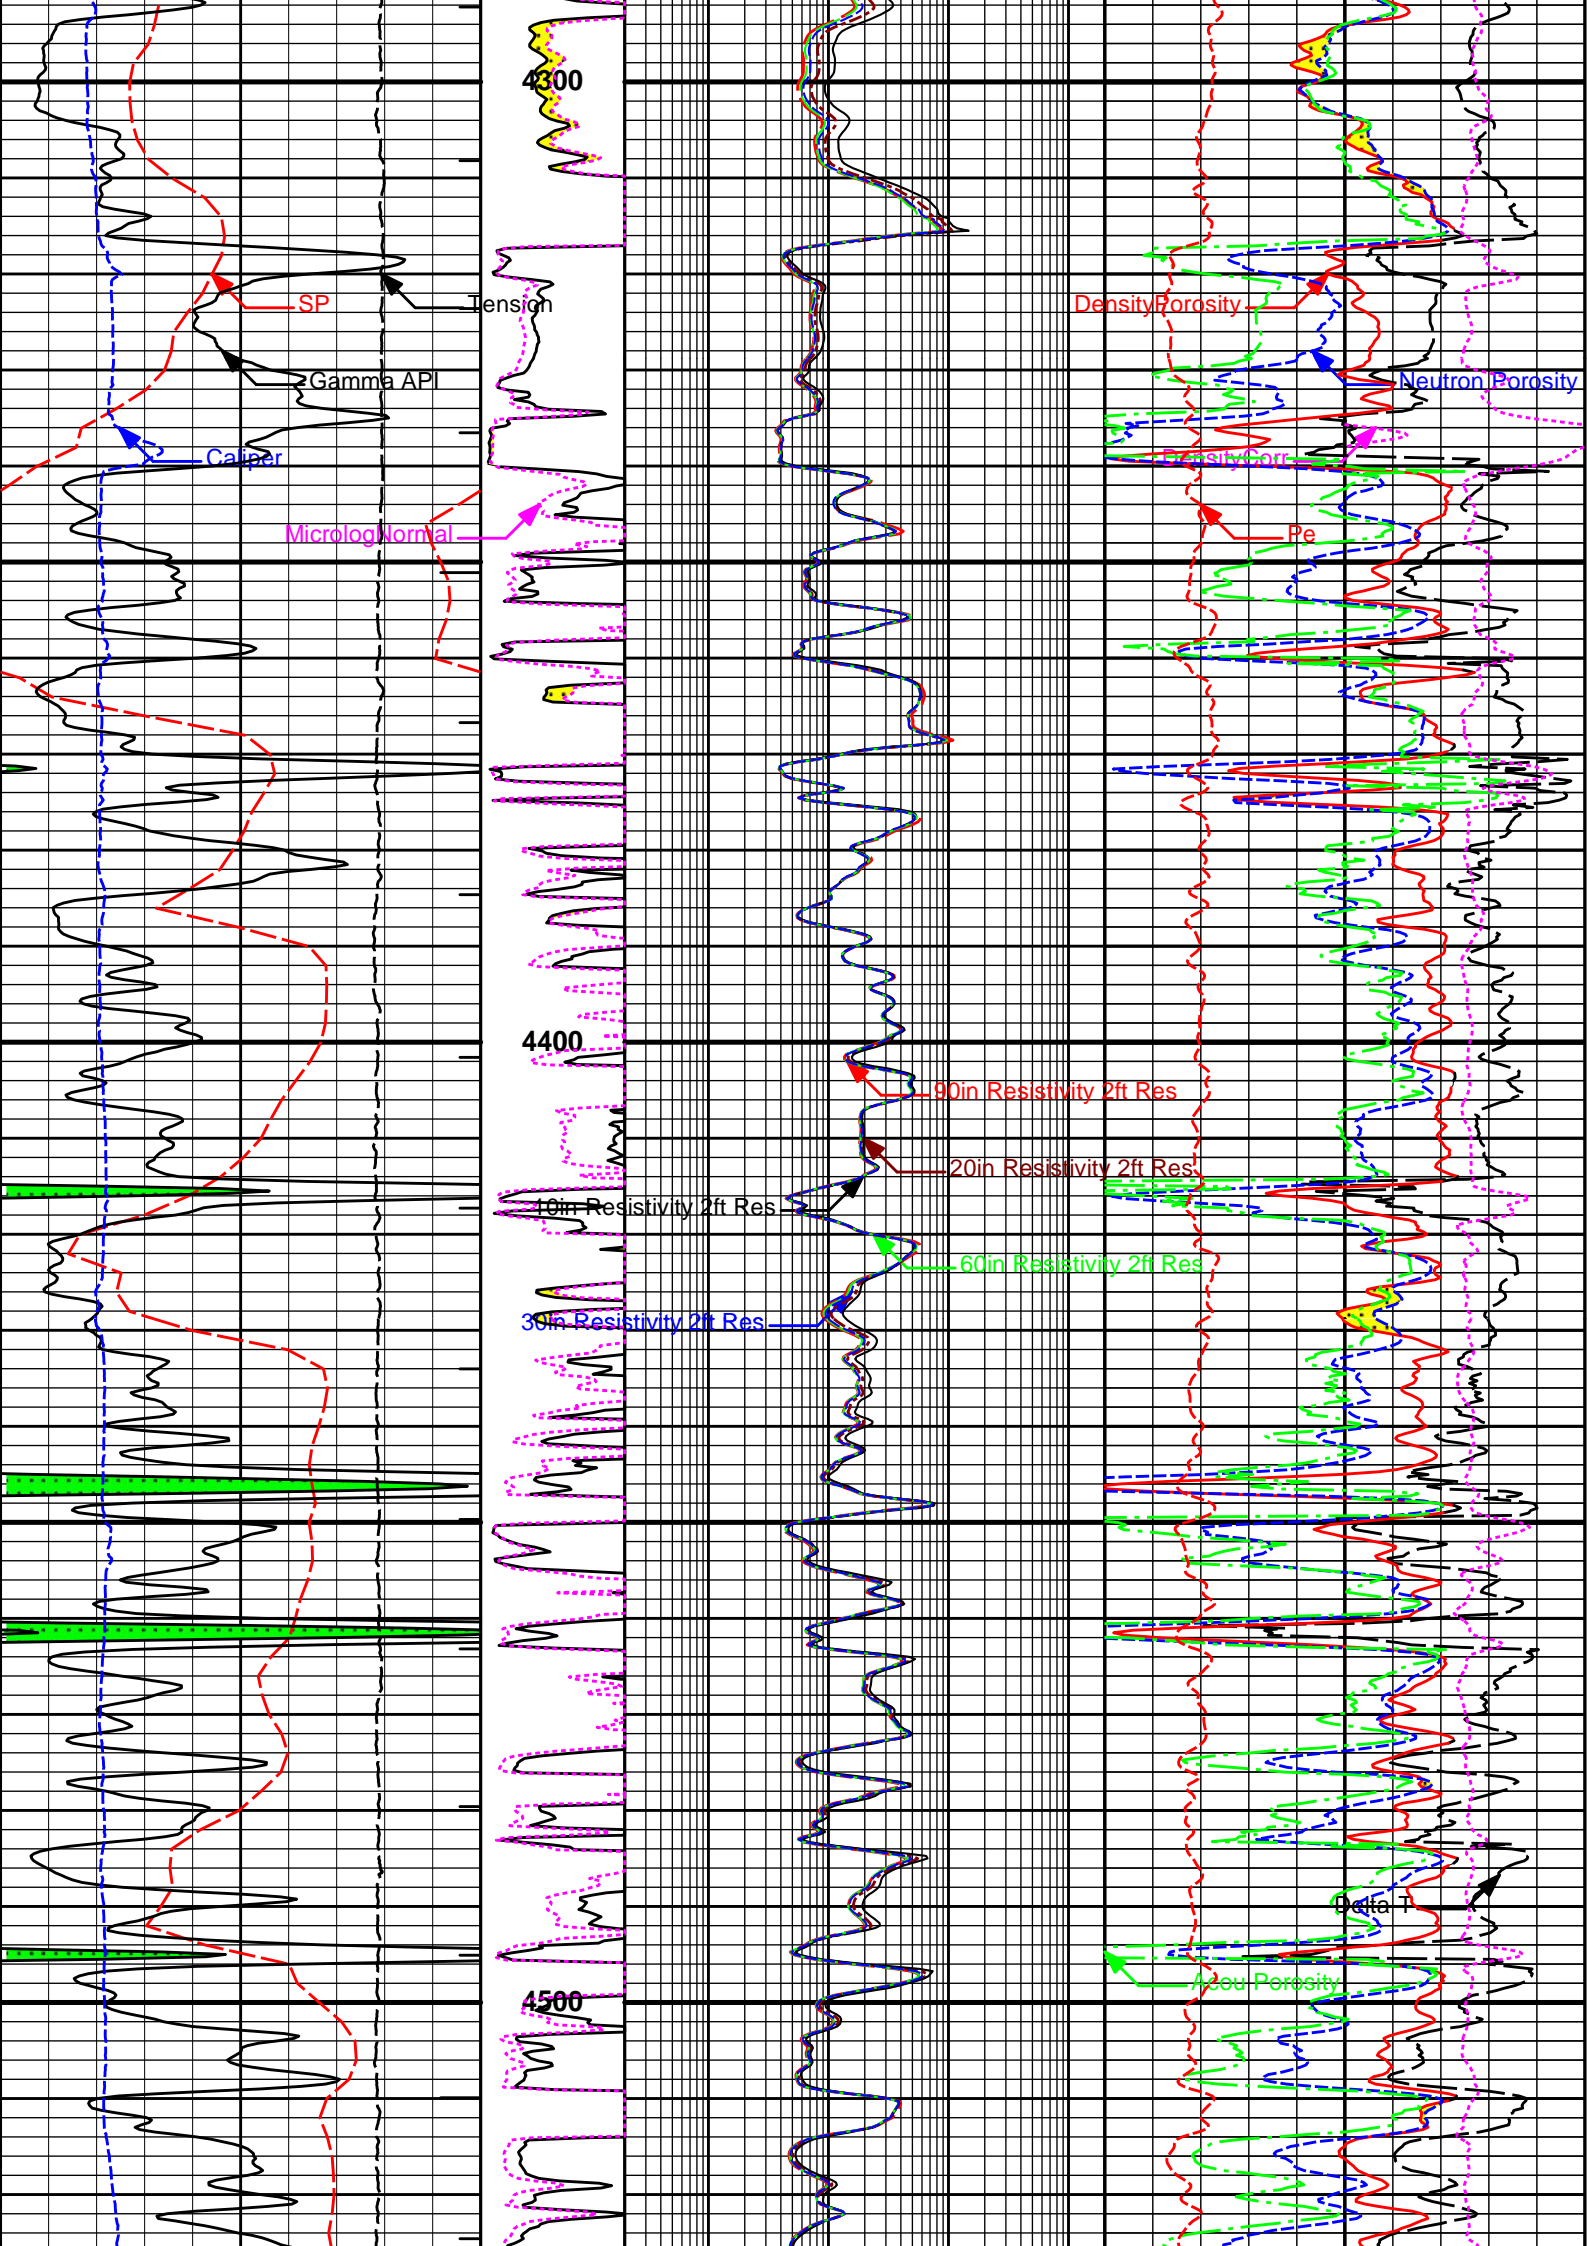

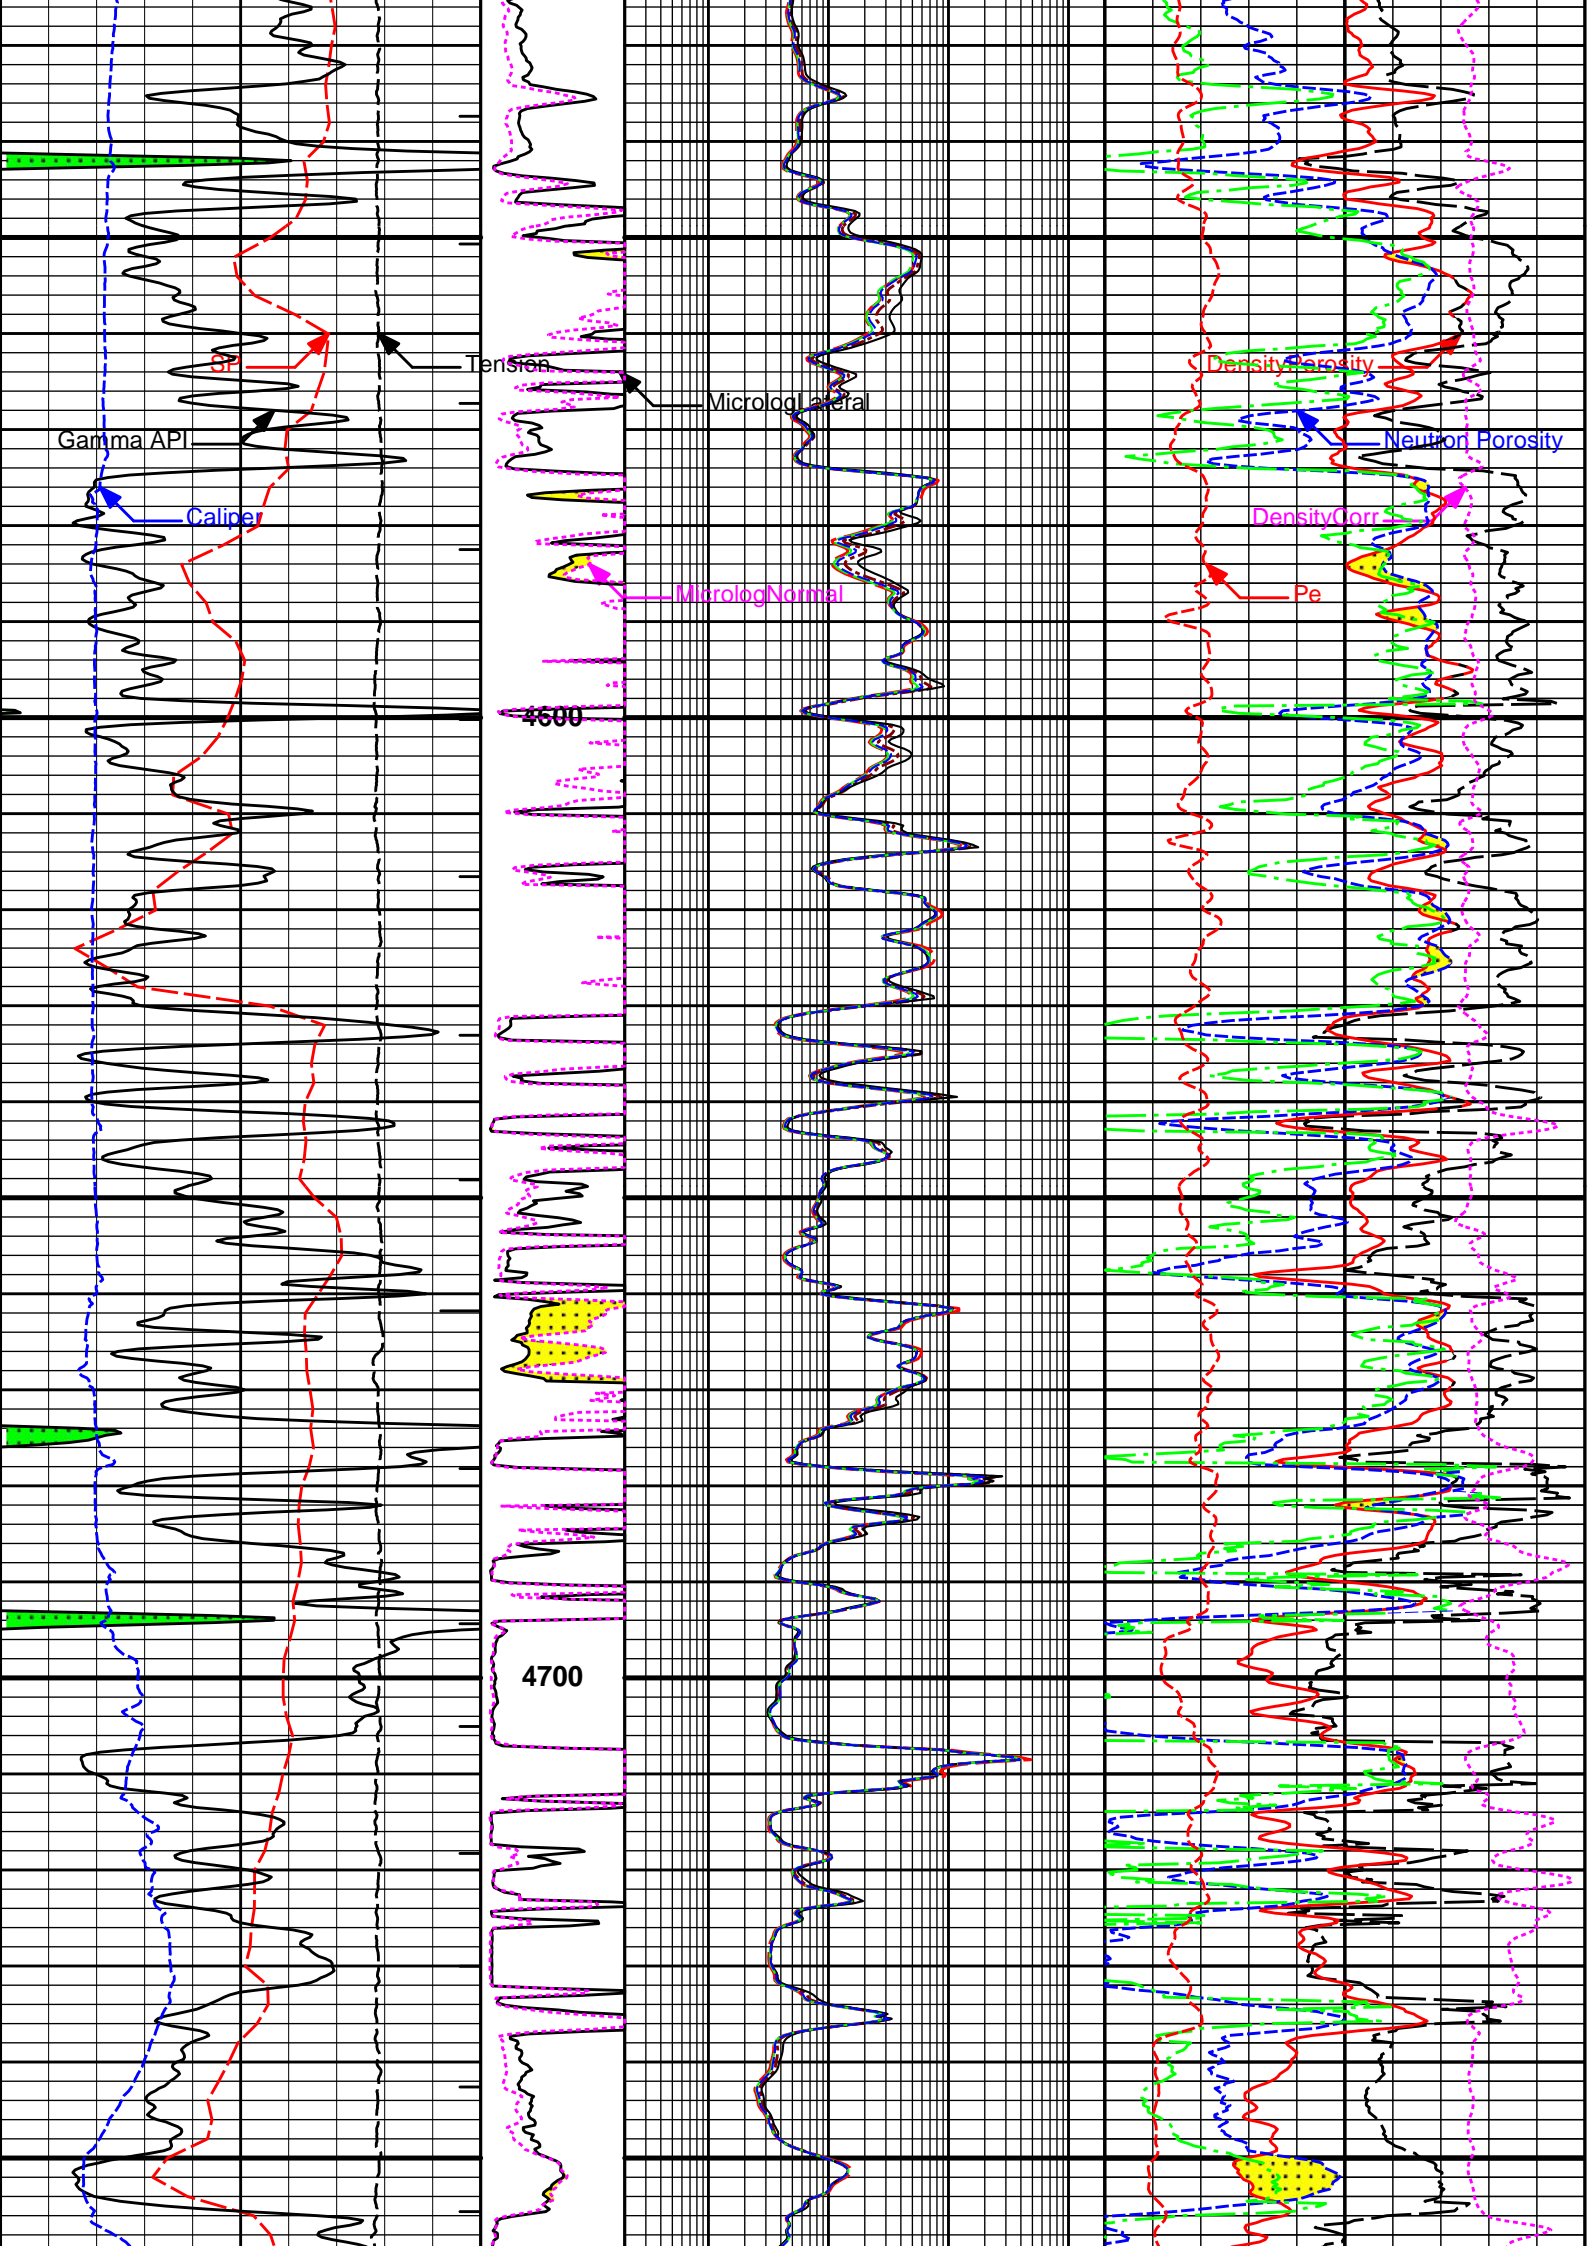

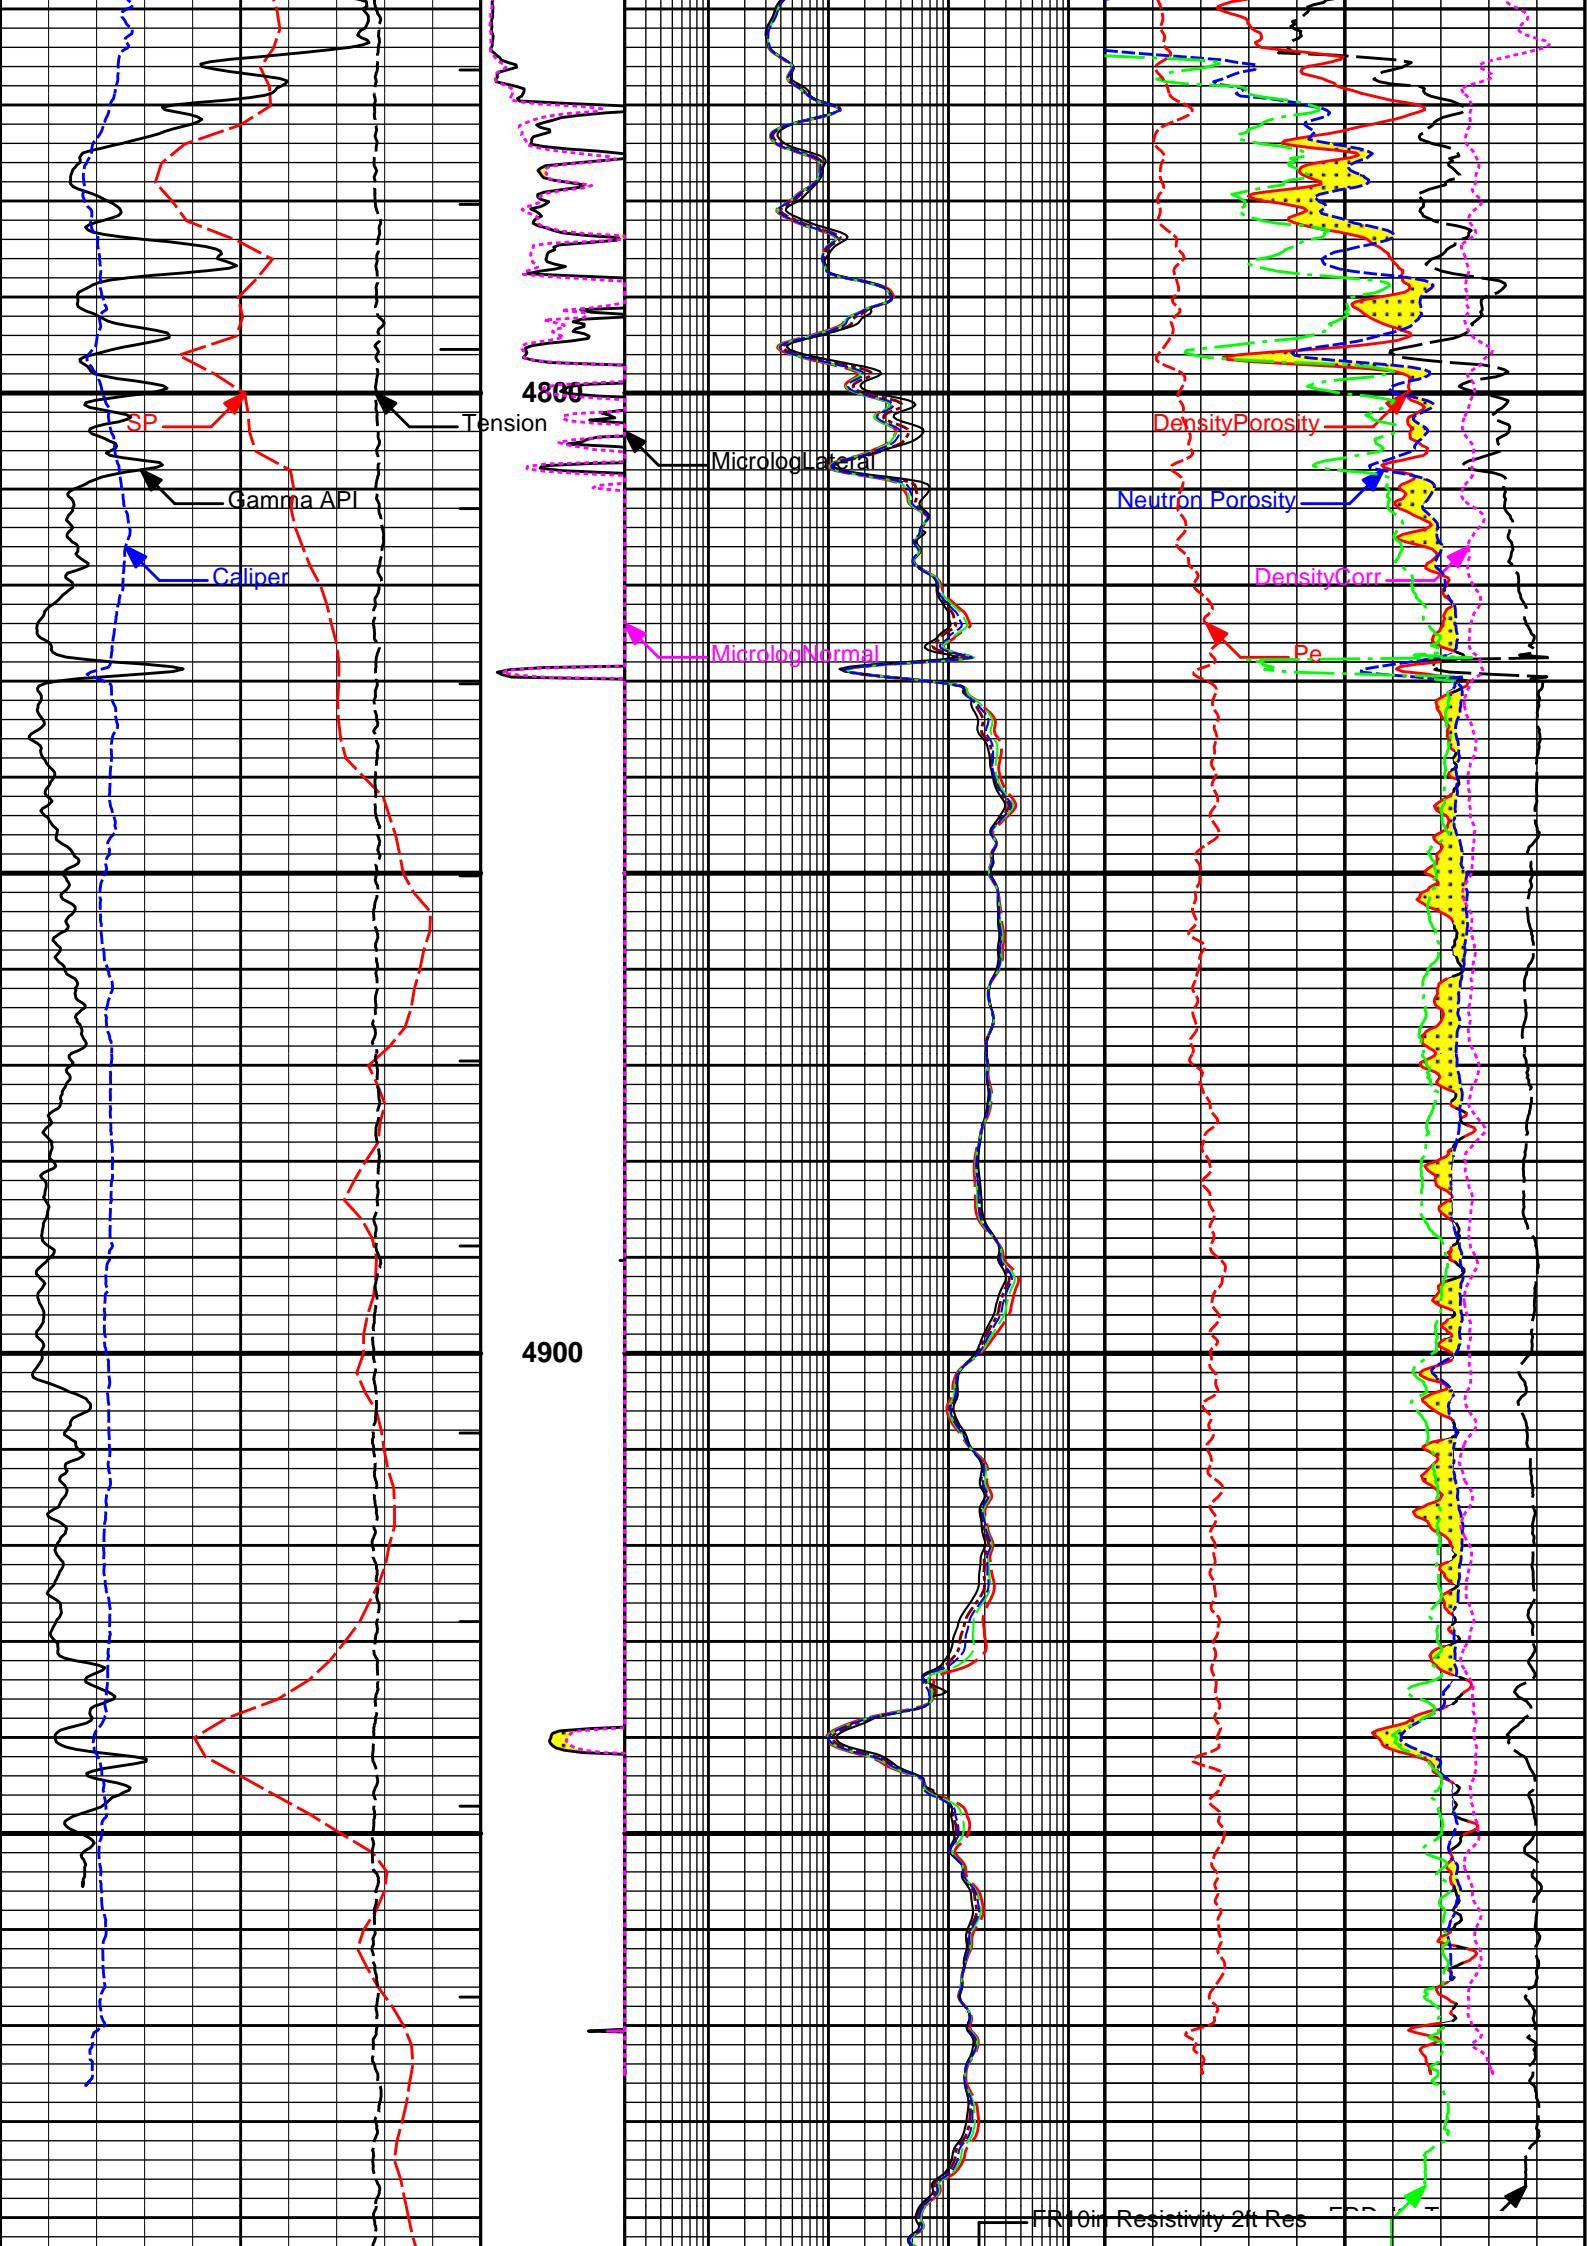

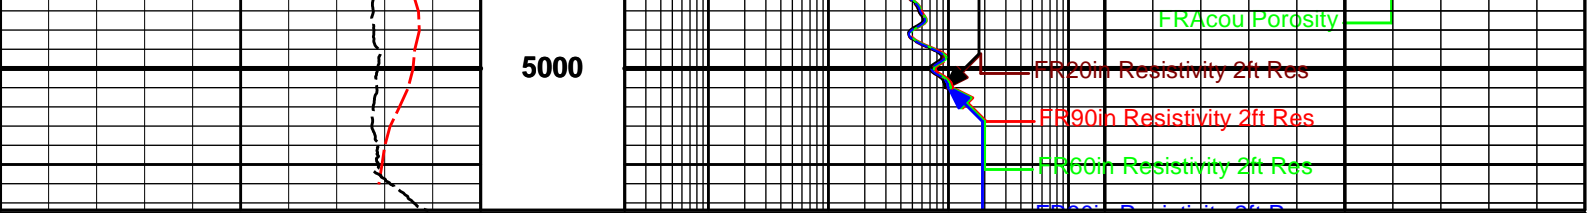

SP -J20[+	1 : 240 ft	0.2	90in Resistivity 2ft Res	2000	0	Pe	10	-0.25	DensityCorr	0.25
Gamma API	150	0.2	20in Resistivity 2ft Res	2000	0.3	Acou Porosity		-0.1		
api		0.2	10in Resistivity 2ft Res	2000	0.3	Neutron Porosity		-0.1		
Caliper	16	0.2	60in Resistivity 2ft Res	2000	0.3	DensityPorosity		-0.1		
inches	0	0.2	30in Resistivity 2ft Res	2000	0.3	POROSITY				
SHALE	0	0.2				Delta-T		140		
Tension	0	0.2				microsec per ft		40		
pounds	0	0.2								
ITTT										

HALLIBURTON

Plot Time: 19-Dec-17 15:26:11
 Plot Range: 3300 ft to 5014.75 ft
 Data: MERIT_HUM_207WWell Based*\
 Plot File: \\QUAD\ACRT-SDL-DSN-ML-BSAT

5 INCH MAIN LOG


HALLIBURTON


Plot Time: 19-Dec-17 15:26:12
 Plot Range: 4530 ft to 5014.5 ft
 Data: MERIT_HUM_207WWell Based\DAQ-0001-002\
 Plot File: \\QUAD\ACRT-SDL-DSN-ML-BSAT


REPEAT SECTION


REPEAT SECTION

ITTT					140	Delta-T		40	
Tension	0					microsec per ft			
pounds	0	PERMEABLE	0.2	30in Resistivity 2ft Res	2000	POROSITY			
SHALE	0	MNOR	20	0.2	60in Resistivity 2ft Res	2000	0.3	DensityPorosity	
Caliper	16	ohmm			ohmm			decp	
inches	0	MINV	20	0.2	10in Resistivity 2ft Res	2000	0.3	Neutron Porosity	
Gamma API	150	ohmm			ohmm			decp	
api		0.2			20in Resistivity 2ft Res	2000	0.3	Acou Porosity	
SP					ohmm			decp	
-J20[+		1 : 240			90in Resistivity 2ft Res	2000	0	Pe	10
		ft			ohmm			-0.25	DensityCorr
								0.25	



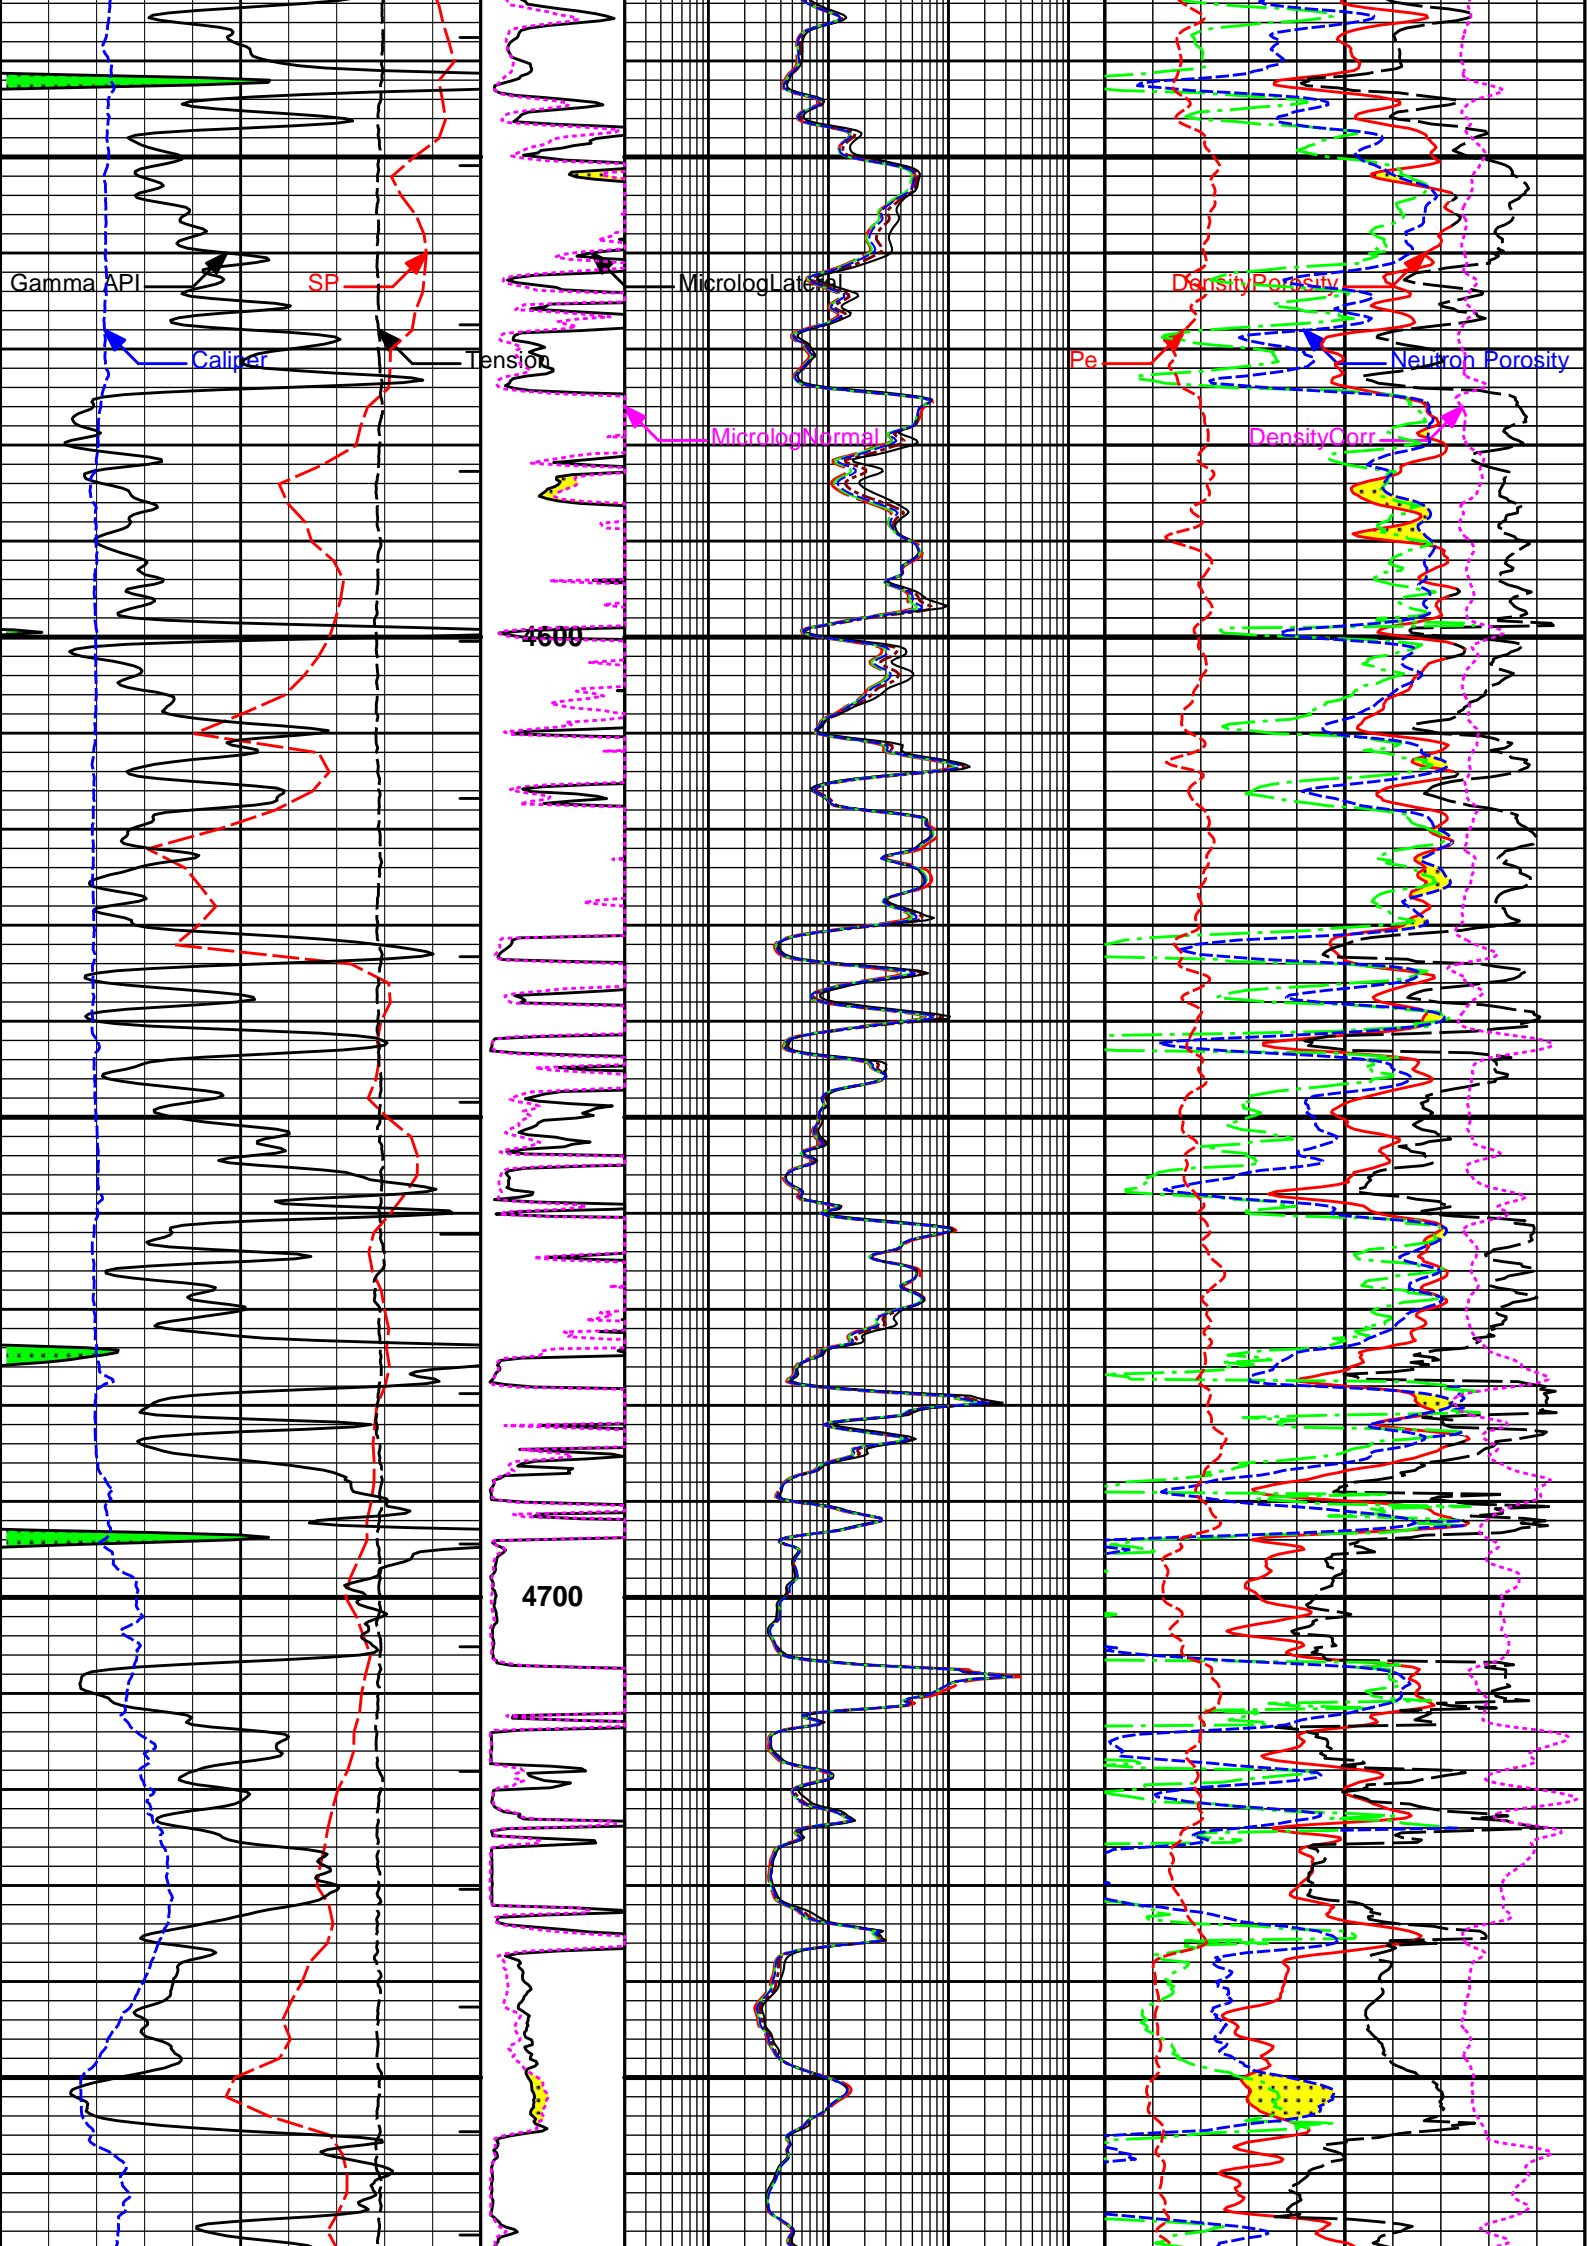

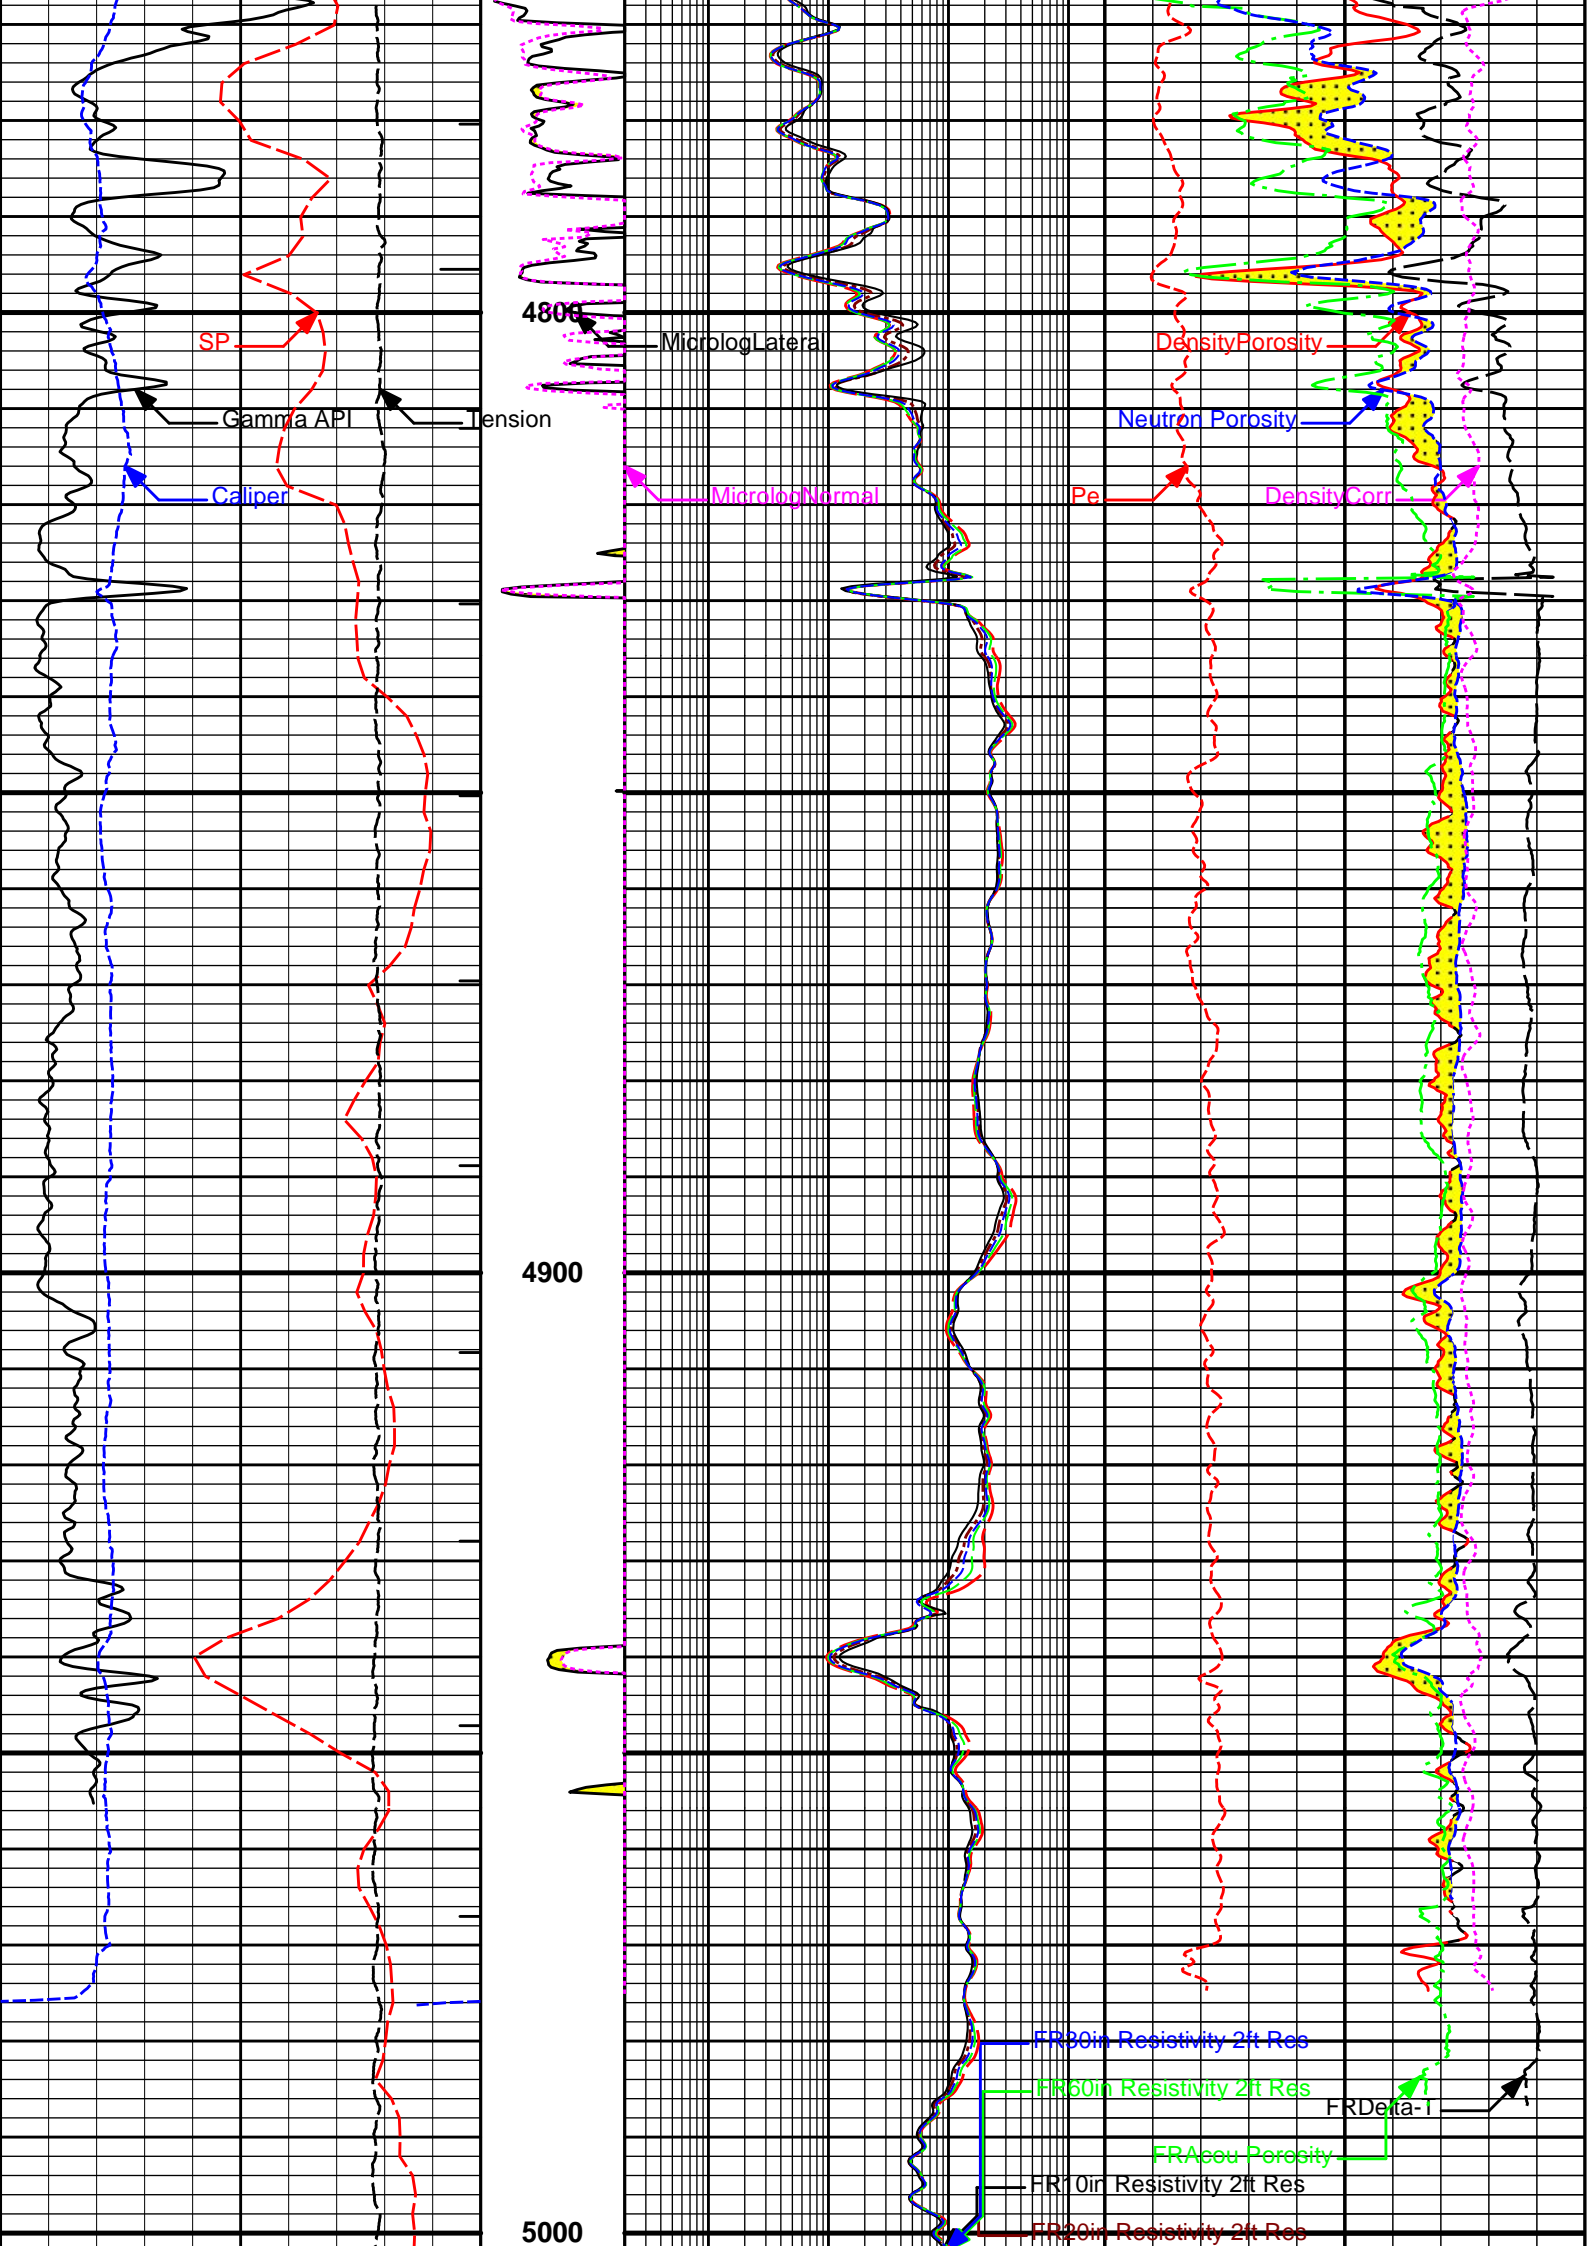

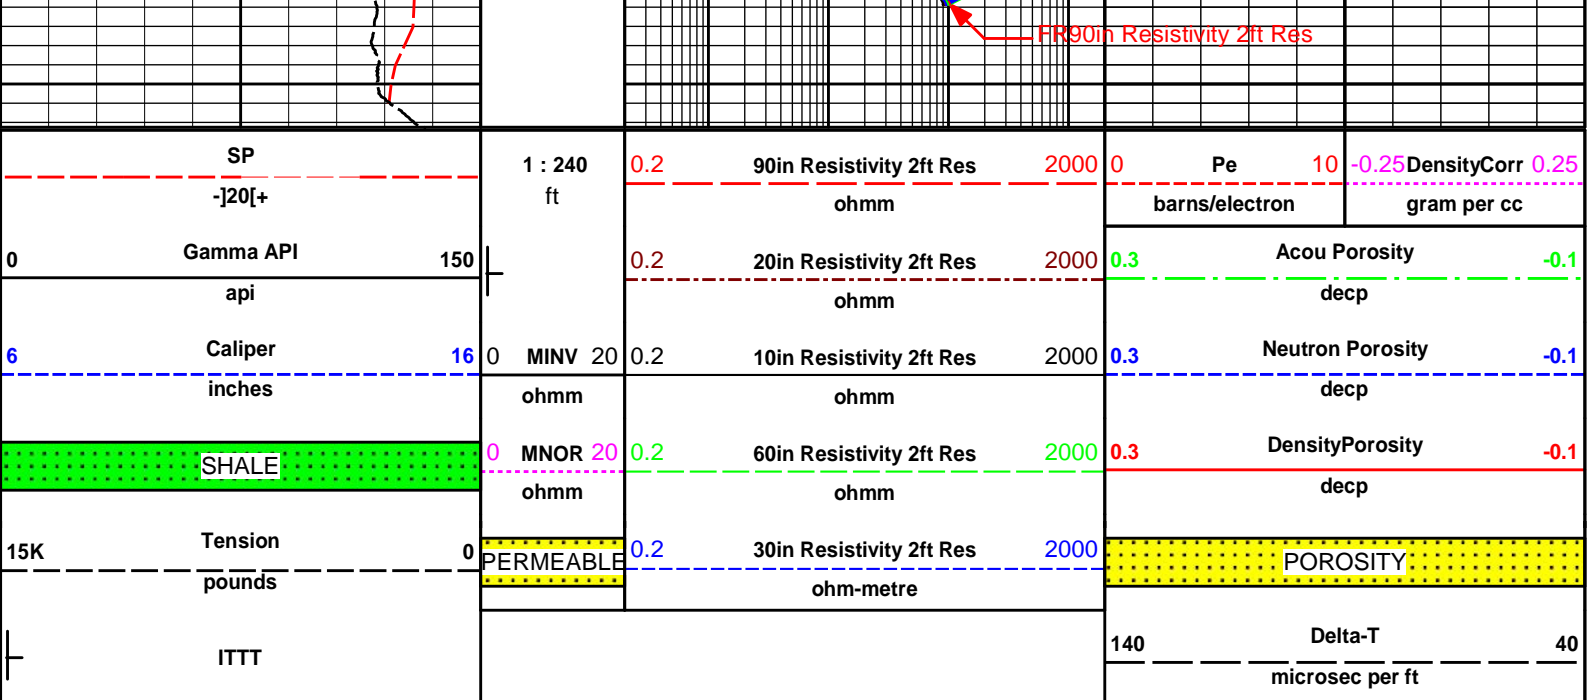

HALLIBURTON

Plot Time: 19-Dec-17 15:26:14
 Plot Range: 4530 ft to 5014.5 ft
 Data: MERIT_HUM_207WWell Based\DAQ-0001-002\
 Plot File: \\QUAD\ACRT-SDL-DSN-ML-BSAT

REPEAT SECTION

REPEAT SECTION

HALLIBURTON

CALIBRATION REPORT

SURFACE TENSION SHOP CALIBRATION

Tool Name: Depth Panel - 12345678 Reference Calibration Date: 23-Apr-17 10:07:58
 Engineer: MICHAEL RICHTER Calibration Date: 24-Jun-17 04:21:48
 Software Version: WL INSITE R5.0.5 (Build 8) Calibration Version: 1

SURFACE TENSION LOAD CELL				
Measurement	Load Cell Value	Measurement	Calibrated	Units
Low	10703.64	164.45	0.00	lbs
High	17362.76	7331.05	7830.00	lbs

DOWNHOLE TENSION SHOP CALIBRATION

Tool Name: CH_HOS - CH_HOS_I Reference Calibration Date: 13-Dec-17 11:53:03
 Engineer: JORGE ORLANDO PEREZ Calibration Date: 17-Dec-17 16:43:38
 Software Version: WL INSITE R5.6.3 (Build 4) Calibration Version: 1

DOWNHOLE LOAD CELL				
Measurement	Tool Value	Measurement	Calibrated	Units
Low	-505.99	-27.96	0.00	lbs
High	5810.79	1723.35	1950.00	lbs

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11021139

Reference Calibration Date: 19-Nov-17 10:38:47

Engineer: WHITLOCK

Calibration Date: 11-Dec-17 12:34:48

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

Measurement	Measured	Calibrated	Units
Background	29.6	29.0	api
Background + Calibrator	260.3	254.9	api
Calibrator	230.7	225.9	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 11021139

Reference Calibration Date: 11-Dec-17 12:34:48

Engineer: WHITLOCK

Calibration Date: 16-Dec-17 15:34:42

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Calibrator Source S/N: TB-79

Calibrator API Reference:222.00 api

Equivalent Calibrator API Reference:225.9 api

Field Verification	Shop	Field	Units
Background	29.0	22.2	api
Background + Calibrator	254.9	241.7	api
Calibrator	225.9	219.5	api

Shop	Field	Difference	Tolerance
225.9	219.5	6.4	+/- 9.00

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name: DSNT - 11660709

Reference Calibration Date: 14-Jul-17 14:37:56

Engineer: MICHAEL RICHTER

Calibration Date: 21-Oct-17 10:02:19

Software Version: WL INSITE R5.4.5 (Build 2)

Calibration Version: 1

Logging Source S/N: DSN-424

Tank Serial Number: EL RENO

Reference value assigned to Tank: 56.100

Snow Block S/N: 668

Calibration Tank Water Temperature: 79 degF

Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS

Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	1.01791	1.01437	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)

Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2369	0.2358	0.0011	+/- 0.0020
Calibrated Ratio:	10.5966	10.5597	0.037	+/- 0.050

VERIFIER

Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0811	0.02000 - 0.09000

PASS/FAIL SUMMARY

Background Check: Passed

Gain-Range Check: Passed

DUAL SPACED NEUTRON FIELD CALIBRATION

Tool Name: DSNT - 11660709

Reference Calibration Date: 21-Oct-17 10:02:19

Engineer: WHITLOCK

Calibration Date: 16-Dec-17 15:22:58

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

Logging Source S/N: DSN-424

Snow Block S/N: 668

NEUTRON FIELD-CHECK SUMMARY

	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decp):	0.0811	0.0877	0.0066	+/- 0.0150

PASS/FAIL SUMMARY

Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

DENSITY CALIPER SHOP CALIBRATION

Tool Name: SDLT - 11014296

Reference Calibration Date: 01-Jan-70 00:00:00

Engineer: WHITLOCK

Calibration Date: 24-Nov-17 12:28:28

Software Version: WL INSITE R5.0.5 (Build 8)

Calibration Version: 1

Host Tool Name: DSNT - 11660709

CALIBRATION COEFFICIENTS

Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-4006.36	-4006.36	-7000.00 - -1000.00
Pad Gain	0.0003890	0.0003890	0.0002000 - 0.0006000
Arm Offset	-2182.86	-2182.86	-5000.00 - 3000.00
Arm Gain	0.0004129	0.0004129	0.0003000 - 0.0007000
Arm Power	0.000002297	0.000002297	-0.000010000 - 0.000010000

The ring diameter is computed from: $\text{DIAMETER} = \text{PAD EXTENSION} + \text{ARM EXTENSION} + \text{TOOL DIAMETER}$

Tool Diameter: 4.50 in

CALIBRATION RINGS

Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	2.00	2.00	0.00	+/- 0.20
Medium Ring (in)	3.75	3.75	0.00	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.50	6.50	0.00	+/- 0.20
Medium Ring (in)	8.25	8.25	0.00	+/- 0.20
Large Ring (in)	15.00	15.00	0.00	+/- 0.20

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
---------------------------------------	--------

SDLT CALIPER FIELD CALIBRATION

Tool Name: SDLT - 11014296

Reference Calibration Date: 24-Nov-17 12:28:28

Engineer: WHITLOCK

Calibration Date: 16-Dec-17 16:11:25

Software Version: WL INSITE R5.6.3 (Build 4)

Calibration Version: 1

MEASURED CALIPER VALUES

Measurement	Shop	Field	Change	Control Limit On
-------------	------	-------	--------	------------------

STANDARD DEVIATIONS									
	R12KHz			R36KHz			R72KHz		
	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail
A1 (80")	0.000	< 0.750	Pass	0.000	< 0.750	Pass	0.000	< 0.750	Pass
A2 (50")	0.000	< 0.750	Pass	0.000	< 0.750	Pass	0.000	< 0.750	Pass
A3 (29")	0.000	< 0.750	Pass	0.000	< 0.750	Pass	0.000	< 0.750	Pass
A4 (17")	0.000	< 0.750	Pass	0.000	< 0.750	Pass	0.000	< 0.750	Pass
A5 (10")	0.000	< 0.750	Pass	0.000	< 0.750	Pass	0.000	< 0.750	Pass
A6 (6")	0.000	< 0.750	Pass	0.000	< 0.750	Pass	0.000	< 0.750	Pass

AVERAGES									
	R12KHz			R36KHz			R72KHz		
	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail	Measured (mmho/m)	Expected (mmho/m)	Pass/Fail
A1 (80")	0.000	< 0.500	Pass	-0.001	> -0.500	Pass	-0.007	> -0.500	Pass
A2 (50")	0.000	< 0.500	Pass	-0.001	> -0.500	Pass	-0.005	> -0.500	Pass
A3 (29")	-0.000	< 0.500	Pass	-0.001	> -0.500	Pass	-0.003	> -0.500	Pass
A4 (17")	-0.003	> -0.500	Pass	-0.008	> -0.500	Pass	-0.024	> -0.500	Pass
A5 (10")	-0.011	> -0.500	Pass	-0.018	> -0.500	Pass	-0.034	> -0.500	Pass
A6 (6")	0.016	< 0.500	Pass	0.078	< 0.500	Pass	0.183	< 0.500	Pass

GAIN TOLERANCE					
R12KHz					
	Measured (mmho/m)	Last Month (mmho/m)	Difference (mmho/m)	Tolerance (mmho/m)	Pass/Fail
A1 (80")	-220721488.000	-223155904.000	2434416.000	11157795.200	Pass
A2 (50")	-218488224.000	-220713888.000	2225664.000	11035694.400	Pass
A3 (29")	-214911568.000	-216614880.000	1703312.000	10830744.000	Pass
A4 (17")	-211434368.000	-214578320.000	3143952.000	10728916.000	Pass
A5 (10")	-211949376.000	-214986432.000	3037056.000	10749321.600	Pass
A6 (6")	-213895760.000	-214394544.000	498784.000	10719727.200	Pass

R36KHz					
	Measured (mmho/m)	Last Month (mmho/m)	Difference (mmho/m)	Tolerance (mmho/m)	Pass/Fail
A1 (80")	59105928.000	60628184.000	1522256.000	3031409.200	Pass
A2 (50")	60252356.000	62049960.000	1797604.000	3102498.000	Pass
A3 (29")	52147940.000	53214172.000	1066232.000	2660708.600	Pass
A4 (17")	48569380.000	50561756.000	1992376.000	2528087.800	Pass
A5 (10")	50672468.000	52600244.000	1927776.000	2630012.200	Pass
A6 (6")	49458680.000	50656572.000	1197892.000	2532828.600	Pass

R72KHz					
	Measured (mmho/m)	Last Month (mmho/m)	Difference (mmho/m)	Tolerance (mmho/m)	Pass/Fail
A1 (80")	-92108696.000	-92698504.000	589808.000	4634925.200	Pass
A2 (50")	-89118672.000	-89662344.000	543672.000	4483117.200	Pass
A3 (29")	-88812376.000	-89109216.000	296840.000	4455460.800	Pass
A4 (17")	-83501792.000	-84842648.000	1340856.000	4242132.400	Pass
A5 (10")	-82094160.000	-83337800.000	1243640.000	4166890.000	Pass
A6 (6")	-84269728.000	-84561904.000	292176.000	4228095.200	Pass

PASS/FAIL SUMMARY

Std Deviation Verification Pass

Average Verification
Gain Tolerance Verification

Pass
Pass

MICRO LOG SHOP CALIBRATION

Tool Name: Microlog Pad - 11014296 Reference Calibration Date: 21-Oct-17 17:40:50
 Engineer: MICHAEL RICHTER Calibration Date: 21-Oct-17 17:42:32
 Software Version: WL INSITE R5.4.5 (Build 2) Calibration Version: 1
 Host Tool Name: DSNT - 11660709

CALIBRATION COEFFICIENT SUMMARY

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.11	-0.14	0.01	0.01	ohmm
Calibration Point #1	0.02	0.00	-0.01	0.00	ohmm
Calibration Point #2	20.00	20.00	19.99	20.00	ohmm
Internal Reference	19.95	19.94	20.00	20.01	ohmm

Measurement	Micro Log Normal	Micro Log Lateral	Units
	Tool Value	Tool Value	
Tool Zero	-10.63	4.50	V
Calibration Point #1	24.92	-0.13	V
Calibration Point #2	5262.56	6875.93	V
Internal Reference	5247.65	6879.76	V

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - 11014296 Reference Calibration Date: 21-Oct-17 17:42:32
 Engineer: WHITLOCK Calibration Date: 16-Dec-17 19:11:09
 Software Version: WL INSITE R5.6.3 (Build 4) Calibration Version: 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.14	-0.10	0.01	0.00	ohmm
Internal Reference	19.94	19.89	20.01	19.96	ohmm

Summary				
Signal	Shop	Field	Difference	Tolerance
Microlog Normal	19.94	19.89	0.05	+/- 0.80
Microlog Lateral	20.01	19.96	0.05	+/- 0.80

SPECTRAL DENSITY SHOP CALIBRATION

Tool Name: SDLT Pad - 10865881 Reference Calibration Date: 16-Dec-17 18:39:59
 Engineer: WHITLOCK Calibration Date: 16-Dec-17 19:00:32
 Software Version: WL INSITE R5.6.3 (Build 4) Calibration Version: 1

Logging Source S/N: 5155GW
 Aluminum Block S/N: EL RENO
 Magnesium Block S/N: EL RENO

Density: 2.581g/cc
 Density: 1.687g/cc

Pe: 3.170
 Pe: 2.594

DENSITY CALIBRATION SUMMARY

Measurement	Previous Value	New Value	Control Limit
Near Bar Gain	1.0190	1.0130	0.90 - 1.10
Near Dens Gain	1.0005	0.9951	0.90 - 1.10
Near Peak Gain	1.0223	1.0145	0.90 - 1.10
Near Lith Gain	1.0517	1.0503	0.90 - 1.10
Far Bar Gain	1.0054	1.0046	0.90 - 1.10
Far Dens Gain	0.9942	0.9923	0.90 - 1.10
Far Peak Gain	0.9912	0.9917	0.90 - 1.10

Far Lith Gain	0.9770	0.9734	0.90 - 1.10
Near Bar Offset	0.1872	0.2425	NONE
Near Dens Offset	0.3382	0.3842	NONE
Near Peak Offset	0.1850	0.2490	NONE
Near Lith Offset	-0.0438	-0.0306	NONE
Far Bar Offset	0.1527	0.1576	NONE
Far Dens Offset	0.2431	0.2592	NONE
Far Peak Offset	0.2590	0.2565	NONE
Far Lith Offset	0.3383	0.3725	NONE

Near Bar Background	930.24	932.15	700 - 1450
Near Dens Background	311.45	312.35	230 - 480
Near Peak Background	133.79	134.32	100 - 210
Near Lith Background	164.51	164.96	125 - 260
Far Bar Background	601.19	603.41	450 - 900
Far Dens Background	235.51	235.02	175 - 345
Far Peak Background	91.58	93.10	70 - 140
Far Lith Background	95.48	97.57	75 - 145

CALIBRATION BLOCK SUMMARY				
Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.687	1.687	0.000	+/- 0.015
Pe	2.557	2.553	-0.004	+/- 0.150
ALUMINUM				
Density (g/cc)	2.579	2.581	0.002	+/- 0.01500
Pe	3.126	3.125	-0.001	+/- 0.150

TOOL SUMMARY				
Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	0.0001	+/- 0.0110	-0.0014	+/- 0.0140
Magnesium Block	-0.0009	+/- 0.0110	0.0002	+/- 0.0140
Aluminum Block	-0.0006	+/- 0.0110	-0.0004	+/- 0.0140
Resolution	9.58	6.00 - 11.50	8.95	6.00 - 11.50
Internal Verifier(B+D+P+L)	1544	1200 - 2700	1029	800 - 1700

PASS/FAIL SUMMARY	
Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

SPECTRAL DENSITY FIELD CHECK			
Tool Name:	SDLT Pad - 10865881	Reference Calibration Date:	16-Dec-17 19:00:32
Engineer:	WHITLOCK	Calibration Date:	16-Dec-17 19:14:23
Software Version:	WL INSITE R5.6.3 (Build 4)	Calibration Version:	1

Pad Temperature: 71.7 degF

DENSITY FIELD CALIBRATION SUMMARY

Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1543.777	1548.009	4.232	15.818
Far (B+D+P+L) cps	1029.100	1023.255	-5.845	17.098
Near Resolution	9.58	9.71	0.130	0.50
Far Resolution	8.95	8.90	-0.050	1.00

PASS/FAIL SUMMARY

Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed
Bkg Verification Check:	Passed

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
Depth Panel-12345678						
Tension Zero	0.00	-----	-----	0.00	-----	lbs
Tension Cal	7830.00	-----	-----	0.00	-----	lbs
CH_HOS-CH_HOS_I						
DH Tension Zero	0.00	-----	-----	0.00	-----	lbs
DH Tension Cal	1950.00	-----	-----	0.00	-----	lbs
GTET-11021139						
Gamma Ray Calibrator	225.9	219.5	-----	6.4	+/- 9.00	api
DSNT-11660709						
Snow-Block Porosity	0.0811	0.0877	-----	-0.0066	+/- 0.0150	decp
SDLT-11014296						
Pad Extension	3.75	3.79	-----	-0.04	+/-0.10	in
Ring Diameter	8.25	8.25	-----	0.00	+/-0.15	in
ACRt Sonde-11038385						
Mud Cell	1.00	-----	-----	0	-----	ohm-m
Microlog Pad-11014296						
MicroLog Normal	19.94	19.89	-----	0.05	+/-0.80	ohmm
MicroLog Lateral	20.01	19.96	-----	0.05	+/-0.80	ohmm
SDLT Pad-10865881						
Near(B+D+P+L)	1543.777	1548.009	-----	-4.232	+/-15.818	cps
Far(B+D+P+L)	1029.100	1023.255	-----	5.845	+/-17.098	cps

Data: MERIT_HUM_207W0001 GTET-DSNT-SDLT-BSAT-ACRT\IDLE

Date: 19-Dec-17 10:31:46

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	
	SHARED	MDWT	Borehole Fluid Weight	9.200	ppg
	SHARED	WAGT	Weighting Agent	Barite	
	SHARED	BSAL	Borehole salinity	0.00	ppm
	SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
	SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
	SHARED	RMUD	Mud Resistivity	2.000	ohmm
	SHARED	TRM	Temperature of Mud	75.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	CSTB	Compressive Strength	1000.00	psia

SHARED	CSTR	Compressive Strength	1000.00	psia
SHARED	ST	Surface Temperature	75.0	degF
SHARED	TD	Total Well Depth	5000.00	ft
SHARED	BHT	Bottom Hole Temperature	125.0	degF
SHARED	SVTM	Navigation and Survey Master Tool	NONE	
SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
SHARED	TEMM	CBM Temperature Master Tool	GTET	
SHARED	SOCI	Source of Casing Information	Parameters	
SHARED	MSAL	Water-base mud filtrate salinity	0.00	ppm
Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
Rwa / CrossPlot	BHSM	Borehole Size Source Tool	SDLT	
Rwa / CrossPlot	ROIN	Input for RO Calculation	Rwa	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
GTET	BHSM	Borehole Size Source Tool	SDLT	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTT	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
DSNT	UCLA	Classic Neutron Parameter utilized?	No	
DSNT	BHSM	Borehole Size Source Tool	SDLT	
SDLT	CLOK	Process Caliper Outputs?	Yes	
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
SDLT Pad	BHSM	Borehole Size Source Tool	SDLT	
BSAT	MBOK	Compute BCAS Results?	Yes	
BSAT	FLLO	Frequency Filter Low Pass Value?	5000	Hz
BSAT	FLHI	Frequency Filter High Pass Value?	27000	Hz
BSAT	DTFL	Delta -T Pore Fluid	189.00	uspf
BSAT	DTMT	Delta -T Matrix Type	Limestone 47.6	
BSAT	DTSH	Delta -T Shale	100.00	uspf
BSAT	SPEQ	Acoustic Porosity Equation	Wylie	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.50	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Up	

ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMAX	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	
ACRt Sonde	MRFX	Fixed mud resistivity	2000	ohmm
ACRt Sonde	BHSM	Borehole Size Source Tool	SDLT	
ACRt Sonde	MBFL	Apply Corkscrew Effect?	No	


BOTTOM

Data: MERIT_HUM_207W\0001 GTET-DSNT-SDLT-BSAT-ACRT\IDLE

Date: 19-Dec-17 10:34:38

HALLIBURTON

TOOL STRING DIAGRAM REPORT

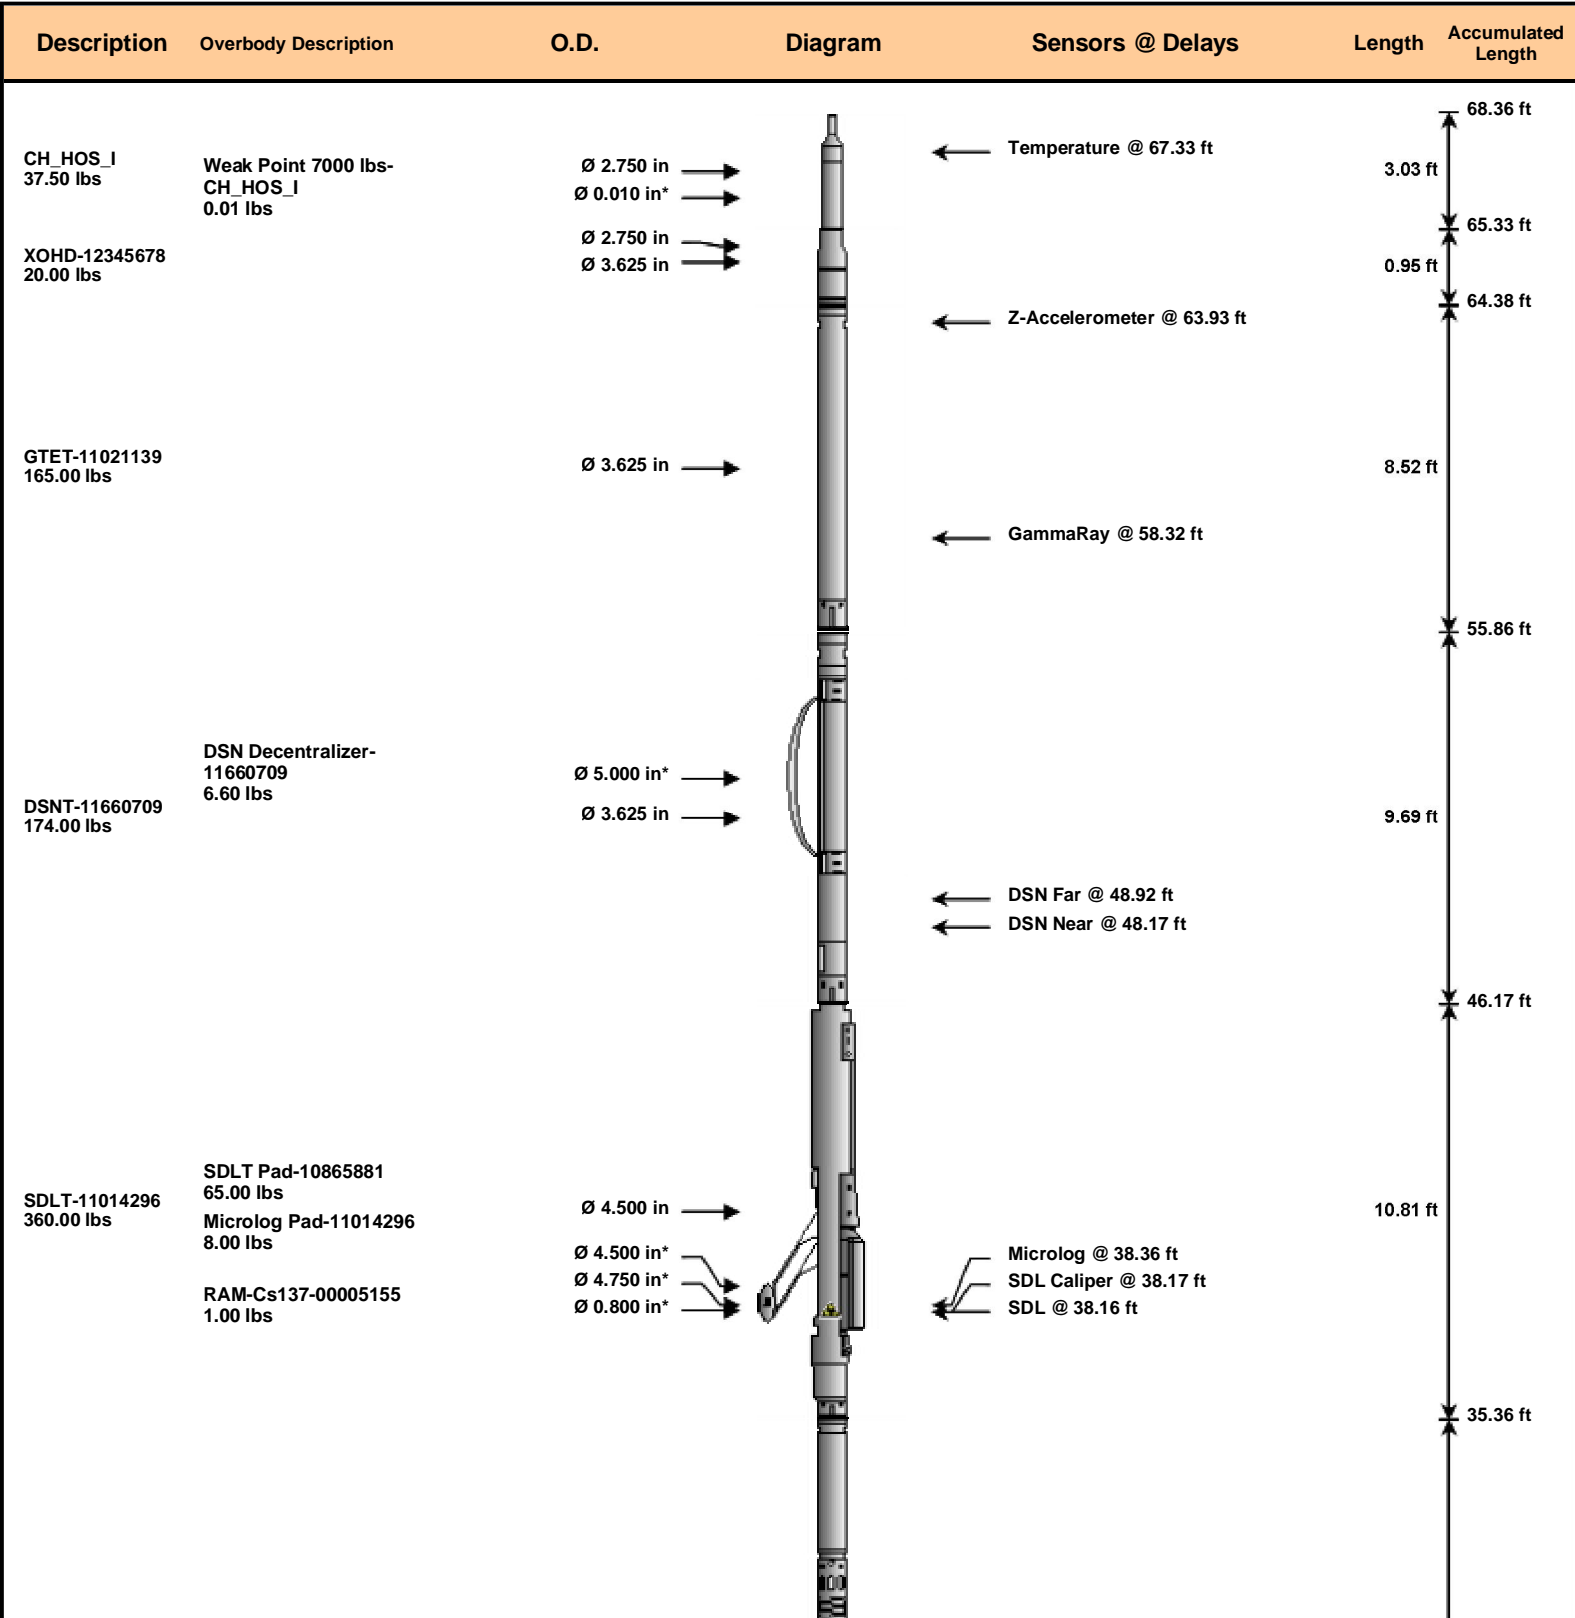

BSAT-10939049
300.00 lbs

Ø 3.625 in →

Receiver Array @ 26.84 ft
Sonic Receivers @ 26.84 ft

15.77 ft

ACRt Instrument-
11055059
50.00 lbs

Ø 3.625 in →

5.03 ft

19.58 ft

ACRt Sonde-
11038385
200.00 lbs

Ø 3.625 in →

14.22 ft

Mud Resistivity @ 13.19 ft

ACRt @ 9.21 ft

14.55 ft

SP Ring-11038385
0.00 lbs

Ø 3.625 in* →

SP @ 1.61 ft

0.33 ft

Bull Nose-12345678
5.00 lbs

Ø 2.750 in →

0.33 ft

0.00 ft



Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell	CH_HOS_I	37.50	3.03	65.33	300.00
WP7K	Weak Point 7000 lbs	CH_HOS_I	0.01	0.01	* 66.13	300.00
XOHD	Hostile to Dits Cross Over	12345678	20.00	0.95	64.38	300.00
GTET	Gamma Telemetry Tool	11021139	165.00	8.52	55.86	60.00
DSNT	Dual Spaced Neutron	11660709	174.00	9.69	46.17	60.00
DCNT	DSN Decentralizer	11660709	6.60	5.13	* 49.50	300.00
SDLT	Spectral Density Tool	11014296	360.00	10.81	35.36	60.00
SDLP	Density Insite Pad	10865881	65.00	2.55	* 37.57	60.00
Cs137	Logging Source, SDLT-I, 1.78 Ci - Cs137	00005155	1.00	0.80	* 37.80	300.00
MICP	Microlog Pad	11014296	8.00	1.00	* 37.86	60.00
BSAT	Borehole Sonic Array Tool	10939049	300.00	15.77	19.58	60.00
ACRt	Array Compensated True Resistivity Instrument Section	11055059	50.00	5.03	14.55	120.00
ACRt	Array Compensated True Resistivity Sonde Section	11038385	200.00	14.22	0.33	120.00
SP	SP Ring	11038385	0.00	0.25	* 1.61	300.00
BLNS	Bull Nose	12345678	5.00	0.33	0.00	300.00

Total **1,392.11** **68.36**

* Not included in Total Length and Length Accumulation.