

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISIONWELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: license # 5565
 name National Cooperative Refinery Assoc.
 address Box 6, 6000 W. 10th
 City/State/Zip Great Bend, Ks. 67530

Operator Contact Person I. J. Gotsche
 Phone 316.793-7824

Contractor: license # 5124
 name Range Drilling Co.

Wellsite Geologist T. G. Wright
 Phone 316.263-1481

PURCHASER

Designate Type of Completion

☒ New Well ☐ Re-Entry ☐ Workover

☐ Oil ☐ SWD ☐ Temp Abd
☐ Gas ☐ Inj ☐ Delayed Comp
☒ Dry ☐ Other (Core, Water Supply etc.)

If OWWO: old well info as follows:

Operator
 Well Name
 Comp. Date Old Total Depth

WELL HISTORY

Drilling Method: ☒ Mud Rotary ☐ Air Rotary ☐ Cable

11-6-84 11-14-84 11-14-84
 Spud Date Date Reached TD Completion Date

3250'
 Total Depth PBD

Amount of Surface Pipe Set and Cemented at 308 feet

Multiple Stage Cementing Collar Used? ☐ Yes ☐ No

If Yes, Show Depth Set feet

If alternate 2 completion, cement circulated
 from feet depth to w/ SX cmt

API NO. 15-191-21,755

County Sumner
 2300' FNL-710' FEL NE/4 East
 (location) Sec. 23 Twp. 32 Rge. 2 West

2890' Ft North from Southeast Corner of Section
 710' Ft West from Southeast Corner of Section
 (Note: locate well in section plat below)


Lease Name Wenrich Well# 1

Field Name

Producing Formation

Elevation: Ground 1167' KB 1174'

Section Plat

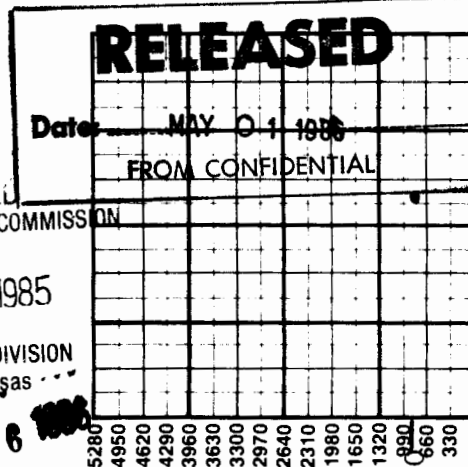

5280
4950
4620
4290
3960
3630
3300
2970
2640
2310
1980
1650
1320
990
660
330

RECEIVED

JAN 14 1985

CONSERVATION DIVISION
Wichita, Kansas

JUN 06 1985

KANSAS GEOLOGICAL SURVEY
WICHITA BRANCH

WATER SUPPLY INFORMATION

☐ Groundwater. Ft North From Southeast Corner and
 (Well) Ft. West From Southeast Corner of

Sec Twp Rge ☐ East ☐ West

☐ Surface Water. Ft North From Southeast Corner and
 (Stream, Pond etc.) Ft West From Southeast Corner

Sec Twp Rge ☐ East ☐ West

☐ Other (explain)
 (purchased from city, R.W.D.#)

Disposition of Produced Water: ☐ Disposal
☐ Repressuring

Docket #

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rules 82-3-130 and 82-3-107 apply.

Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 confidentiality in excess of 12 months.

All wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with abandoned wells.

SIDE TWO

Operator Name NCRA Lease Name Wenrich Well# 1 SEC 23 TWP 32 RGE 2 ☒ East ☒ West

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken ☐ Yes ☒ No
 Samples Sent to Geological Survey ☒ Yes ☐ No
 Cores Taken ☐ Yes ☒ No

Formation Description
☒ Log ☐ Sample

Name	Top	Bottom
Stalnaker Sand	2260'	
Kansas City	2694'	
Cherokee Shale	3090'	
Bartlesville Sand	3158'	
Penn. Cong.	3184'	
Miss. Chert	3204'	
Miss. Limestone	3234'	
TD	3250'	

CASING RECORD

☐ new ☐ used

Report all strings set - conductor, surface, intermediate, production, etc.

Purpose of string	size hole drilled	size casing set (in O.D.)	weight lbs/ft.	setting depth	type of cement	# sacks used	type and percent additives
Surface	12 1/4	8 5/8	24	308	Common	250	3% CaCl ₂

PERFORATION RECORD

Acid, Fracture, Shot, Cement Squeeze Record

shots per foot	specify footage of each interval perforated	(amount and kind of material used)	Depth

pl
23-32-26
1 Wenrich

DRILLING PROGRESS

11/8/84	308	under surface	
11/9	745		
11/10	1645		
11/11	2370		
11/12	2925		
11/13	3250 TD	D & A	

BIT RECORD

Reed	FP52	308 - 2966
Reed	FP52	2966 - 3250TD

RECEIVED
STATE CORPORATION COMMISSION

NOV 19 1984
CONSERVATION DIVISION
Wichita, Kansas

RECEIVED
STATE CORPORATION COMMISSION

NOV 19 1984
CONSERVATION DIVISION
Wichita, Kansas