


15-035-23648

23-32s-6E

FORMATION

TEST

REPORT

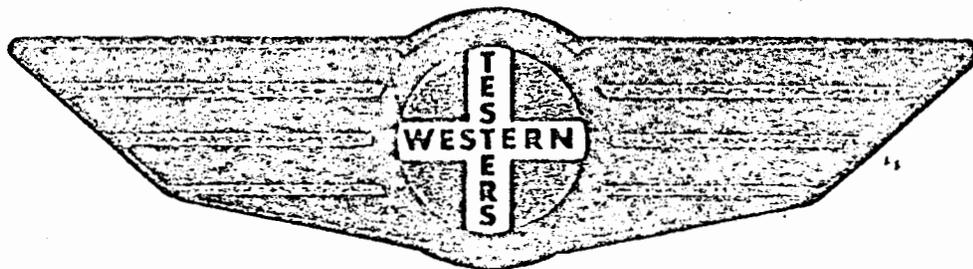

Home Office:

Wichita, Kansas 67201

P.O. Box 1599

Phone (316) 262-5861

COMPANY R R ABDERHALDEN LEASE & WELL NO. #9 LORTON SEC. 23 TWP. 32SRGE.6E TEST NO. 1 DATE 11/16/85

WESTERN TESTING CO. INC.
SUBSURFACE PRESSURE SURVEY

DATE: 11/16/85 TICKET #6161
 CUSTOMER: R.R. ABDERHALDEN LEASE: LORTON
 WELL: 9 TEST: 1 GEOLOGIST: HANCOCK
 ELEVATION (KB): 1353 FORMATION: LAYTON
 SECTION: 23 TOWNSHIP: 32S
 RANGE: 6E COUNTY: COWLEY STATE: KANSAS
 GAUGE SN #5666 RANGE: 3950 CLOCK: 12

INTERVAL TEST FROM: 2198 FT TO: 2254 FT TOTAL DEPTH: 2254 FT
 DEPTH OF SELECTIVE ZONE: FT
 PACKER DEPTH: 2193 FT SIZE: 6 3/4 IN PACKER DEPTH: 2198 FT SIZE: 6 3/4 IN
 PACKER DEPTH: FT SIZE: IN PACKER DEPTH: FT SIZE: IN

DRILLING CONTRACTOR: R.R.A. DRLG
 MUD TYPE: CHEMICAL VISCOSITY: 54
 WEIGHT: 9.4 WATER LOSS (CC): 11.0
 CHLORIDES (P.P.M.): 1200
 JARS - MAKE: SERIAL NUMBER:
 DID WELL FLOW? NO REVERSED OUT? NO
 DRILL COLLAR LENGTH: 418 FT I.D.: 2.25 IN
 WEIGHT PIPE LENGTH: FT I.D.: IN
 DRILL PIPE LENGTH: 1760 FT I.D.: 3.8 IN
 TEST TOOL LENGTH: 20 FT TOOL SIZE: 5 1/2 OD IN
 ANCHOR LENGTH: 56 FT SIZE: 5 1/2 OD IN
 SURFACE CHOKE SIZE: 3/4 IN BOTTOM CHOKE SIZE: 3/4 IN
 MAIN HOLE SIZE: 7 7/8 IN TOOL JOINT SIZE: 4 1/2 XH IN

BLOW: STRONG BLOW THROUGHOUT TEST.

RECOVERED: 730 FT OF: MUDDY SALT WATER.
 RECOVERED: FT OF: CHLORIDES 34000 PPM.
 RECOVERED: FT OF:
 RECOVERED: FT OF:

REMARKS:


TIME SET PACKER(S): 7:15 PM TIME STARTED OFF BOTTOM: 10:15 PM
 WELL TEMPERATURE: 98 °F
 INITIAL HYDROSTATIC PRESSURE: (A) 1082 PSI
 INITIAL FLOW PERIOD MIN: 45 (B) 280 PSI TO (C) 380 PSI
 INITIAL CLOSED IN PERIOD MIN: 45 (D) 818 PSI
 FINAL FLOW PERIOD MIN: 45 (E) 381 PSI TO (F) 398 PSI
 FINAL CLOSED IN PERIOD MIN: 45 (G) 759 PSI
 FINAL HYDROSTATIC PRESSURE (H) 1082 PSI

1717
6161

TKT # 6161

I

5166

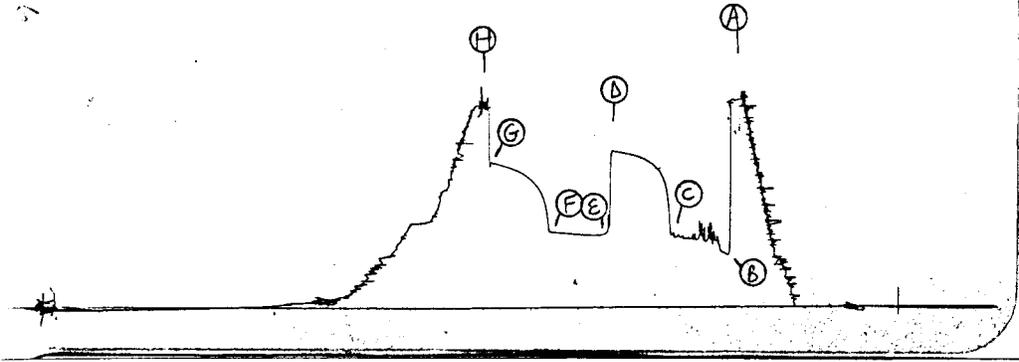


Inside Recorder

3354

TKT # 6161

0

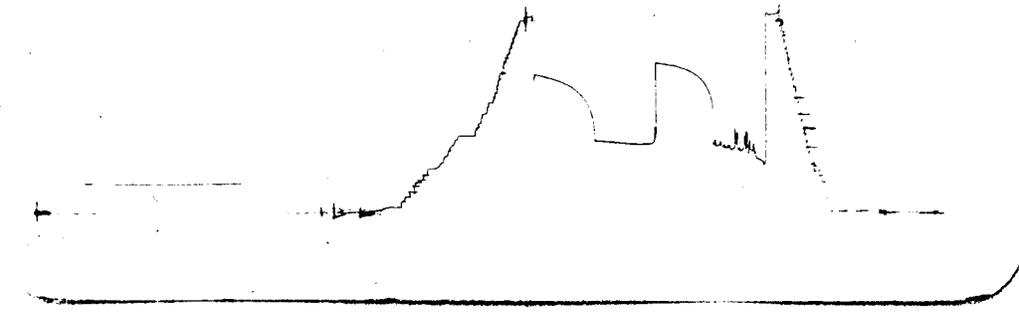

Outside Recorder