


WELL LOG BUREAU -- KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

Company - DEEP ROCK & L. B. JACKSON JR.
Farm - Benton Potts No. 1

SEC. 9 T. 33 R. 3E
SW NW NW

Total Depth. 3551'
Comm. 3-16-47 Comp. 4-16-47
Shot or Treated.
Contractor. L. B. Jackson Jr. Trustee
Issued. 6-21-47

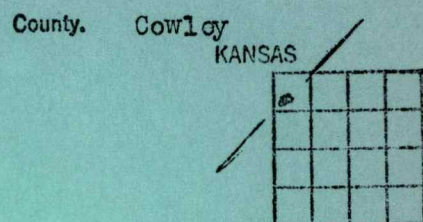

Elevation. _____

Production. Dry

CASING:

10 $\frac{3}{4}$ " 105' Cem. w/75 sx

Figures Indicate Bottom of Formations.

sand & gravel	0-70
red bed & lime	100
lime & shale	115
lime, sand & shale	220
lime & shale	375
lime	490
shale & lime	750
shale	855
shale & lime shells	900
lime & shale	1435
lime	1545
lime & shale	1690
shale & lime shells	1795
shale & lime	1890
lime	1930
lime & shale	2115
lime	2180
shale	2240
sand	2275
lime	2305
shale	2390
lime	2405
shale	2465
shale & lime	2530
shale	2575
sand	2605
lime	2640
sand	2665
shale	2725
lime	2845
lime & shale	2915
lime	3065
lime & shale	3145
lime	3215
lime hrd	3410
shale	3530
lime	3551
Total Depth	

Plugged and abandoned.

Corporation Commission shows TD 3554.
Schlumberger shows TD as 3550.

Tops:

Stalnakor "sand" (Lansing)	2168
Layton "sand" (K.C.)	2580
Bartlesville Sand	3171
Miss. Limestone	3188-3253
Chattanooga Shale	3398
(Base Miss. "lime")	
Simpson formation	3520
	3520-25
Arbuckle Dolomite	3525-51

All measurements from top of rotary
bushing which was 6' above ground
& 3' above derrick floor.