


Section 15 Township 10 Range 15 W

Well No. # 1 Schloh

Company Anderson & Prichard

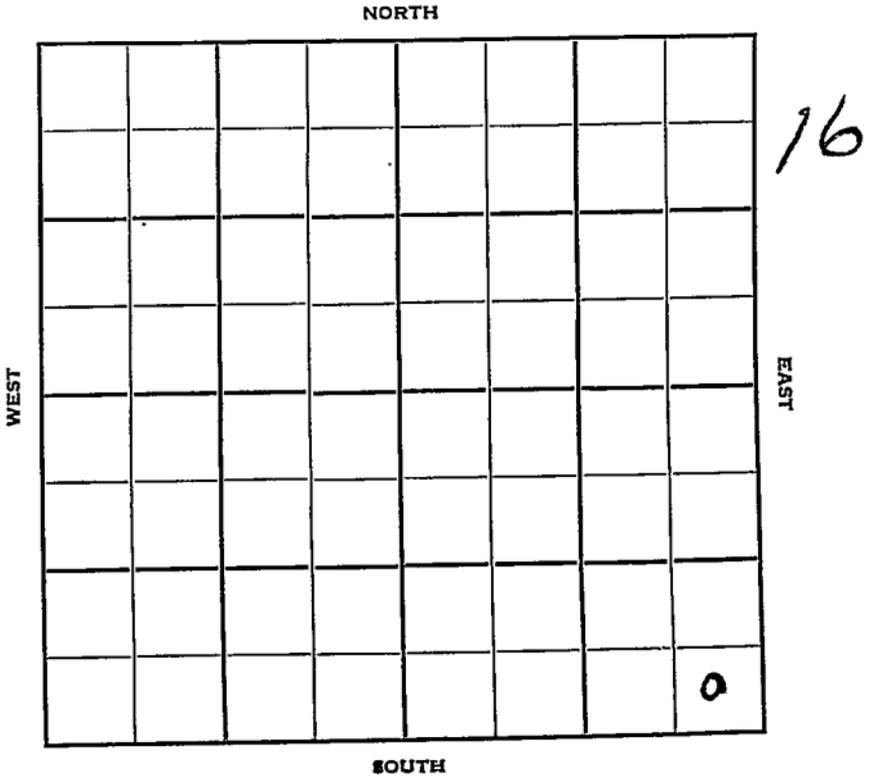

Sec. 15 Twp. 10 R. 15 W

Well No. # 1 Schloh Farm

Anderson & Prichard Company

Peel Contractor

Ruggles


Ft. from N. Line

330 Ft. from S. Line

330 Ft. from E. Line

Ft. from W. Line

SE SE SE

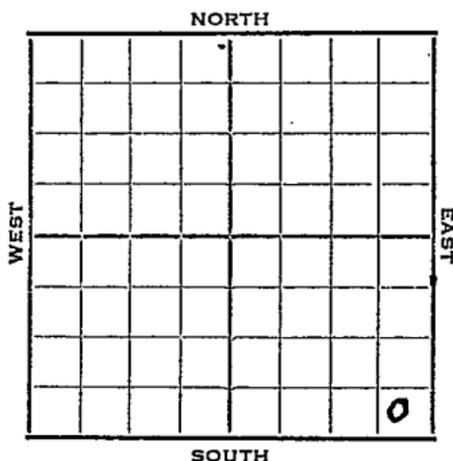

1952

Elev. 1885' REPORT

4/30

Spud 4-27-52
8" @ 195' WOC

5/7

Heeb. 2996 Tor. 3017
Lans. 3046

DST 3050-85, 1 hr. 90' VSOCM 870#
DST 3100-3140, 1 hr. 120' CSO&GCM
30' oil, 780' gassy muddy oil 1100#
FP 280#

DST 3241-49, 1 hr. 30' wtry mud 0#
Drlg.

5/14

Comp sd 3408'
DST 3399-3425, 1 hr, 15' OCM, 770#
Simp 3467-70' RTD 5" @ 3469' WOC

5/21

CO 3425 Ran Gamma Ray
24/3406-12 wtr 24/3414-20
7 GalToph & SSW 24/3420-26
15/3414-20 35 gal oph & SSW
S/100 BO & 5% wtr 20 hr . POP

5/28

NR

6/11

Spud 4-27-52
Oil well TD 3470' 8" @ 195' Heeb 2996
Tor. 3017' Lans. 3046'
DST 3050-85 open 1 hr. rec 90' VSOCM
DST 3100-3140 open 1 hr. rec 120' VSO
& GCM, 30' oil, 780' gassy muddy oil
DST 3241-49 open 1 hr. rec 30' wtry mud

OVER

1952

6/11

(Information continued)

Cong. 3408'

DST 3399-3425 open 1 hr, rec. 115' OGM

Simp. 3467' 5" @ 3469 TD 3470

CO to 3425. 24/3406-12 water

24/3414-20 7 GOPH & SSW 24/3420-26

15/3414-20 35 GOPH & SSW 1500 A

S/100 BO 5% water 20 hr.

Comp. 93 BOPD 10 BW

COMPLETED

