


1 LOCATION OF WATER WELL: County: COAL Fraction 3/4 Sec Below Section Number 28 Township Number T 11 S Range Number R 6 EW

Distance and direction from nearest town or city street address of well if located within city?

± 250' E. of Dickman Ave. & 275' N of Marshall Ave. Main Post, Ft. Riley, KS 354MW95-6A

2 WATER WELL OWNER: U.S. Army Corps of Engineers  
 RR#, St. Address, Box # : 601 East 12th Street Board of Agriculture, Division of Water Resource  
 City, State, ZIP Code : Kansas City, Missouri 64106 Application Number:

3 LOCATE WELL'S LOCATION WITH AN "X" IN SECTION BOX: 4 DEPTH OF COMPLETED WELL: 33.7 ft. ELEVATION: ...

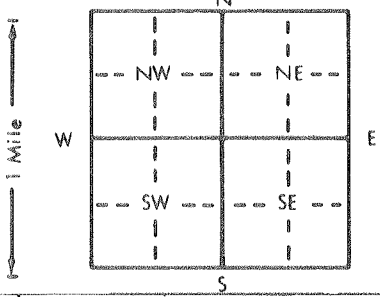

Depth(s) Groundwater Encountered 1. 30.7 ft. 2. ... ft. 3. ... ft.  
 WELL'S STATIC WATER LEVEL ... ft. below land surface measured on mo/day/yr ...  
 Pump test data: Well water was ... ft. after ... hours pumping ... gpm  
 Est. Yield ... gpm: Well water was ... ft. after ... hours pumping ... gpm  
 Bore Hole Diameter: 10.5 in. to 33.9 ft., and ... in. to ... ft.  
 WELL WATER TO BE USED AS: 5 Public water supply 8 Air conditioning 11 Injection well  
 1 Domestic 3 Feedlot 6 Oil field water supply 9 Dewatering 12 Other (Specify below)  
 2 Irrigation 4 Industrial 7 Lawn and garden only 10 Monitoring well  
 Was a chemical/bacteriological sample submitted to Department? Yes ... No X ...; If yes, mo/day/yr sample was submitted  
 Water Well Disinfected? Yes No X

5 TYPE OF BLANK CASING USED: 5 Wrought iron 8 Concrete tile CASING JOINTS: Glued ... Clamped ...  
 1 Steel 3 RMP (SR) 6 Asbestos-Cement 9 Other (specify below) Welded ...  
 2 PVC 4 ABS 7 Fiberglass Threaded X

Blank casing diameter ... 2 in. to 18.7 ft., Dia ... in. to ... ft., Dia ... in. to ... ft.  
 Casing height above land surface ... 1.5 in., weight Steel Flush-Mount Cover lbs./ft. Wall thickness or gauge No. Sch. 40

TYPE OF SCREEN OR PERFORATION MATERIAL: 7 PVC 10 Asbestos-cement  
 1 Steel 3 Stainless steel 5 Fiberglass 8 RMP (SR) 11 Other (specify) ...  
 2 Brass 4 Galvanized steel 6 Concrete tile 9 ABS 12 None used (open hole)

SCREEN OR PERFORATION OPENINGS ARE: 5 Gauzed wrapped 8 Saw cut 11 None (open hole)  
 1 Continuous slot 3 Mill slot 6 Wire wrapped 9 Drilled holes  
 2 Louvered shutter 4 Key punched 7 Torch cut 10 Other (specify) ...

SCREEN-PERFORATED INTERVALS: From 33.7 ft. to 18.7 ft., From ... ft. to ... ft.  
 GRAVEL PACK INTERVALS: From 33.9 ft. to 16 ft., From ... ft. to ... ft.

6 GROUT MATERIAL: 1 Neat cement 2 Cement grout 3 Bentonite 4 Other Bentonite Slurry 16'-12'  
 Grout Intervals: From 12 ft. to 3 ft., From ... ft. to Concrete ... ft., From 3 ft. to 0 ft.

What is the nearest source of possible contamination:  
 1 Septic tank 4 Lateral lines 7 Pit privy 10 Livestock pens 14 Abandoned water well  
 2 Sewer lines 5 Cess pool 8 Sewage lagoon 11 Fuel storage 15 Oil well/Gas well  
 3 Watertight sewer lines 6 Seepage pit 9 Feedyard 12 Fertilizer storage 16 Other (specify below)  
 UST Site

Direction from well? How many feet?

FROM	TO	LITHOLOGIC LOG	FROM	TO	PLUGGING INTERVALS
0	4"	Asphalt			
4"	1.8'	Gravel			
1.8'	8.5'	Dark Brown Silty Clay, Trace Sand			
8.5	29	Brown Fine Sand			
29	33.9	Brown Fine to Medium Sand			
* Location Referenced to Ft. Riley Datum					
267,833 N. 2,347,256 E. 1100.1 Elev.					

7 CONTRACTOR'S OR LANDOWNER'S CERTIFICATION: This water well was (1) constructed, (2) reconstructed, or (3) plugged under my jurisdiction and was completed on (mo/day/year) 3/9/95 and this record is true to the best of my knowledge and belief. Kansas Water Well Contractor's License No. 510 This Water Well Record was completed on (mo/day/yr) 4/26/95 under the business name of MIKON Corporation by (signature) Paul Krume