

GEOLOGICAL SOCIETY
Wichita, Kansas


NOV 10 1972

API #15-163-20,378

29-10-19W

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

KANSAS



RUTH M. LARGENT #1
SE SW SE, Sec. 29-10S-19W
Rooks County, Kansas

Commenced: June 28, 1971
Completed: July 8, 1971

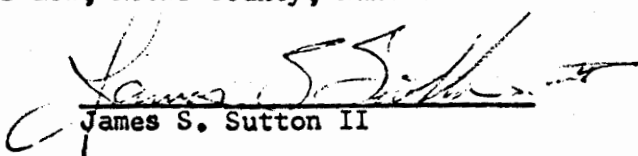
OPERATOR: Clinton Oil Company

2204 KB

34 BOPD.
Fr. w. l.

DEPTH		FORMATION	REMARKS
From	To		
0	95	Surface Clay & rocks & sand	Ran 7 joints of new 20#
95	256	Sand and Shale	8 5/8" csg set @ 254'
256	735	Shale and Sand	w/185 sx common cement.
735	1489	Lime, Shale, Sand	P.D. 7 PM 6/28/1971
1489	1586	Shale and Redbed	Cement Cir. Job by Sun
1586	1625	Anhydrite	
1625	1733	Shale	
1733	2005	Shale and Lime	
2005	3187	Lime and Shale	
3187	3517	Lime	
3517	3582	Lime and Shale	
3582	3712	Lime	
3712	3765	Lime-Shale-Conglomerate	
3765	3768	Lime-Conglomerate	Ran 119 jts of 14# new
3768	TD		5 1/2" csg set @ 3764 w/ 175 sks. Deras-tuff fiber 1/8# per sack P.D. @ 5:30 PM 7/8/71 Job by Halliburton

I, James S. Sutton, II, certify this is a correct copy of the Drillers' Log for the well drilled in the SE SW SE, Sec. 29-10S-19W, Rooks County, Kansas to the best of my knowledge and belief.



James S. Sutton II

ST# Log tops

COT	ANhy	1588
	TOpeka	3188
	Heebner	3407
St#	Toronto	3431
per	Lansing	3447
ins	BKC	3660
act	Marm	3683
	Cong	3698
	Simp	3728
ant	Arb	3762
	LTD	3765
	RTD	3768

undersigned, a Notary Public within and for said County and of July, 1971, personally appeared James S. Sutton II to me he identical person who executed the within and foregoing ed to me that he executed the same as his free and voluntary ; and purposes therein set forth.

EOF, I have hereunto set my hand and official seal the day en.


Marjorie Hall, Notary Public

commission expires November 29, 1971