


35-10s-20w

15-105-23180-00 00

KGS



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

Prepared For: **Thomason Petro**

PO Box 875
Hays, Ks
67601

ATTN: Keith Reavis

35-10s-20w Rooks KS

Keller #1

Start Date: 2008.12.13 @ 20:23:03

End Date: 2008.12.14 @ 01:50:57

Job Ticket #: 33765

DST #: 1

8050 FNL 2310 FEL
N2 SW SW NE

Trilobite Testing, Inc

PO Box 1733 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620

Thomason Petro


Keller #1

35-10s-20w Rooks KS

DST # 1

LKC "G"

2008.12.13



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

Thomason Petro

PO Box 875

Hays, Ks

67601

ATTN: Keith Reavis

Keller #1

35-10s-20w Rooks KS

Job Ticket: 33765

DST#: 1

Test Start: 2008.12.13 @ 20:23:03

GENERAL INFORMATION:

Formation: **LKC "G"**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 22:08:58

Time Test Ended: 01:50:57

Interval: 3564.00 ft (KB) To 3595.00 ft (KB) (TVD)

Total Depth: 3595.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition:

Test Type: Conventional Bottom Hole

Tester: Brian Fairbank

Unit No: 41

Reference Elevations: 2210.00 ft (KB)

2202.00 ft (CF)

KB to GR/CF: 8.00 ft

Serial #: 8371

Inside

Press@RunDepth: 26.27 psig @ 3567.00 ft (KB)

Start Date: 2008.12.13

End Date:

2008.12.14

Start Time: 20:23:03

End Time:

01:50:57

Capacity: 7000.00 psig

Last Calib.: 2008.12.14

Time On Btm: 2008.12.13 @ 22:07:58


Time Off Btm: 2008.12.14 @ 00:18:58

TEST COMMENT: IFP - weak blow throughout sur - 1/4"

ISI - no blow back

FFP - no blow

FSI - no blow back

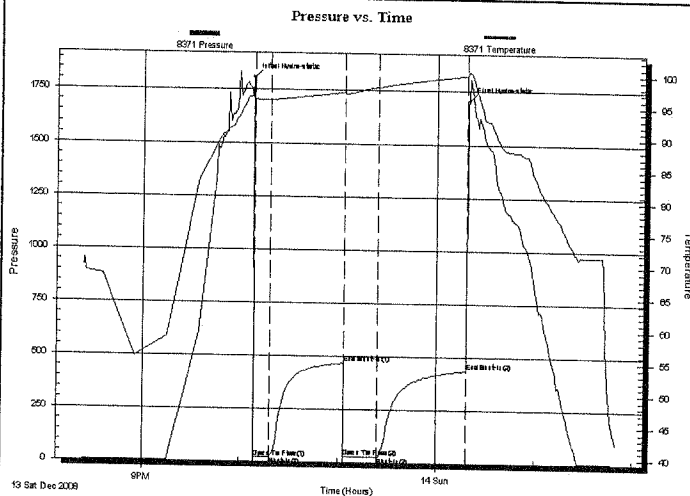

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1808.55	96.45	Initial Hydro-static
1	19.43	95.72	Open To Flow (1)
11	23.08	95.83	Shut-In (1)
56	465.81	97.16	End Shut-In (1)
56	24.68	96.91	Open To Flow (2)
76	26.27	97.94	Shut-In (2)
130	434.00	99.85	End Shut-In (2)
131	1706.60	100.35	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
2.00	mud 100%	0.01

Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
----------------	-----------------	------------------



**TRILOBITE
TESTING, INC**

DRILL STEM TEST REPORT

TOOL DIAGRAM

Thomason Petro

Keller #1

PO Box 875

35-10s-20w Rooks KS

Hays, Ks

Job Ticket: 33765

DST#: 1

67601

Test Start: 2008.12.13 @ 20:23:03

ATTN: Keith Reavis

Tool Information

Drill Pipe:	Length:	3540.00 ft	Diameter:	3.80 inches	Volume:	49.66 bbl	Tool Weight:	2500.00 lb
Heavy Wt. Pipe:	Length:	0.00 ft	Diameter:	0.00 inches	Volume:	0.00 bbl	Weight set on Packer:	25000.00 lb
Drill Collar:	Length:	31.00 ft	Diameter:	2.25 inches	Volume:	0.15 bbl	Weight to Pull Loose:	55000.00 lb
					<u>Total Volume:</u>	<u>49.81 bbl</u>	Tool Chased	0.00 ft
Drill Pipe Above KB:		34.00 ft					String Weight: Initial	50000.00 lb
Depth to Top Packer:		3564.00 ft					Final	50000.00 lb
Depth to Bottom Packer:		ft						
Interval between Packers:		31.00 ft						
Tool Length:		58.00 ft						
Number of Packers:		2	Diameter:	6.75 inches				

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
------------------	-------------	------------	----------	------------	----------------

Shut In Tool	5.00			3542.00	
Hydraulic tool	5.00			3547.00	
Jars	5.00			3552.00	
Safety Joint	2.00			3554.00	
Packer	5.00			3559.00	27.00 Bottom Of Top Packer
Packer	5.00			3564.00	
Stubb	1.00			3565.00	
Perforations	2.00			3567.00	
Recorder	0.00	8018	Inside	3567.00	
Recorder	0.00	8371	Inside	3567.00	
Perforations	25.00			3592.00	
Bullnose	3.00			3595.00	31.00 Bottom Packers & Anchor

Total Tool Length: 58.00



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

FLUID SUMMARY

Thomason Petro

Keller #1

PO Box 875

35-10s-20w Rooks KS

Hays, Ks

Job Ticket: 33765

DST#: 1

67601

Test Start: 2008.12.13 @ 20:23:03

ATTN: Keith Reavis

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 51.00 sec/qt

Cushion Volume:

bbl

Water Loss: 9.71 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 6200.00 ppm

Filter Cake: inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
2.00	mud 100%	0.010

Total Length: 2.00 ft

Total Volume: 0.010 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0


Serial #:


Laboratory Name:

Laboratory Location:

Recovery Comments:

Pressure vs. Time

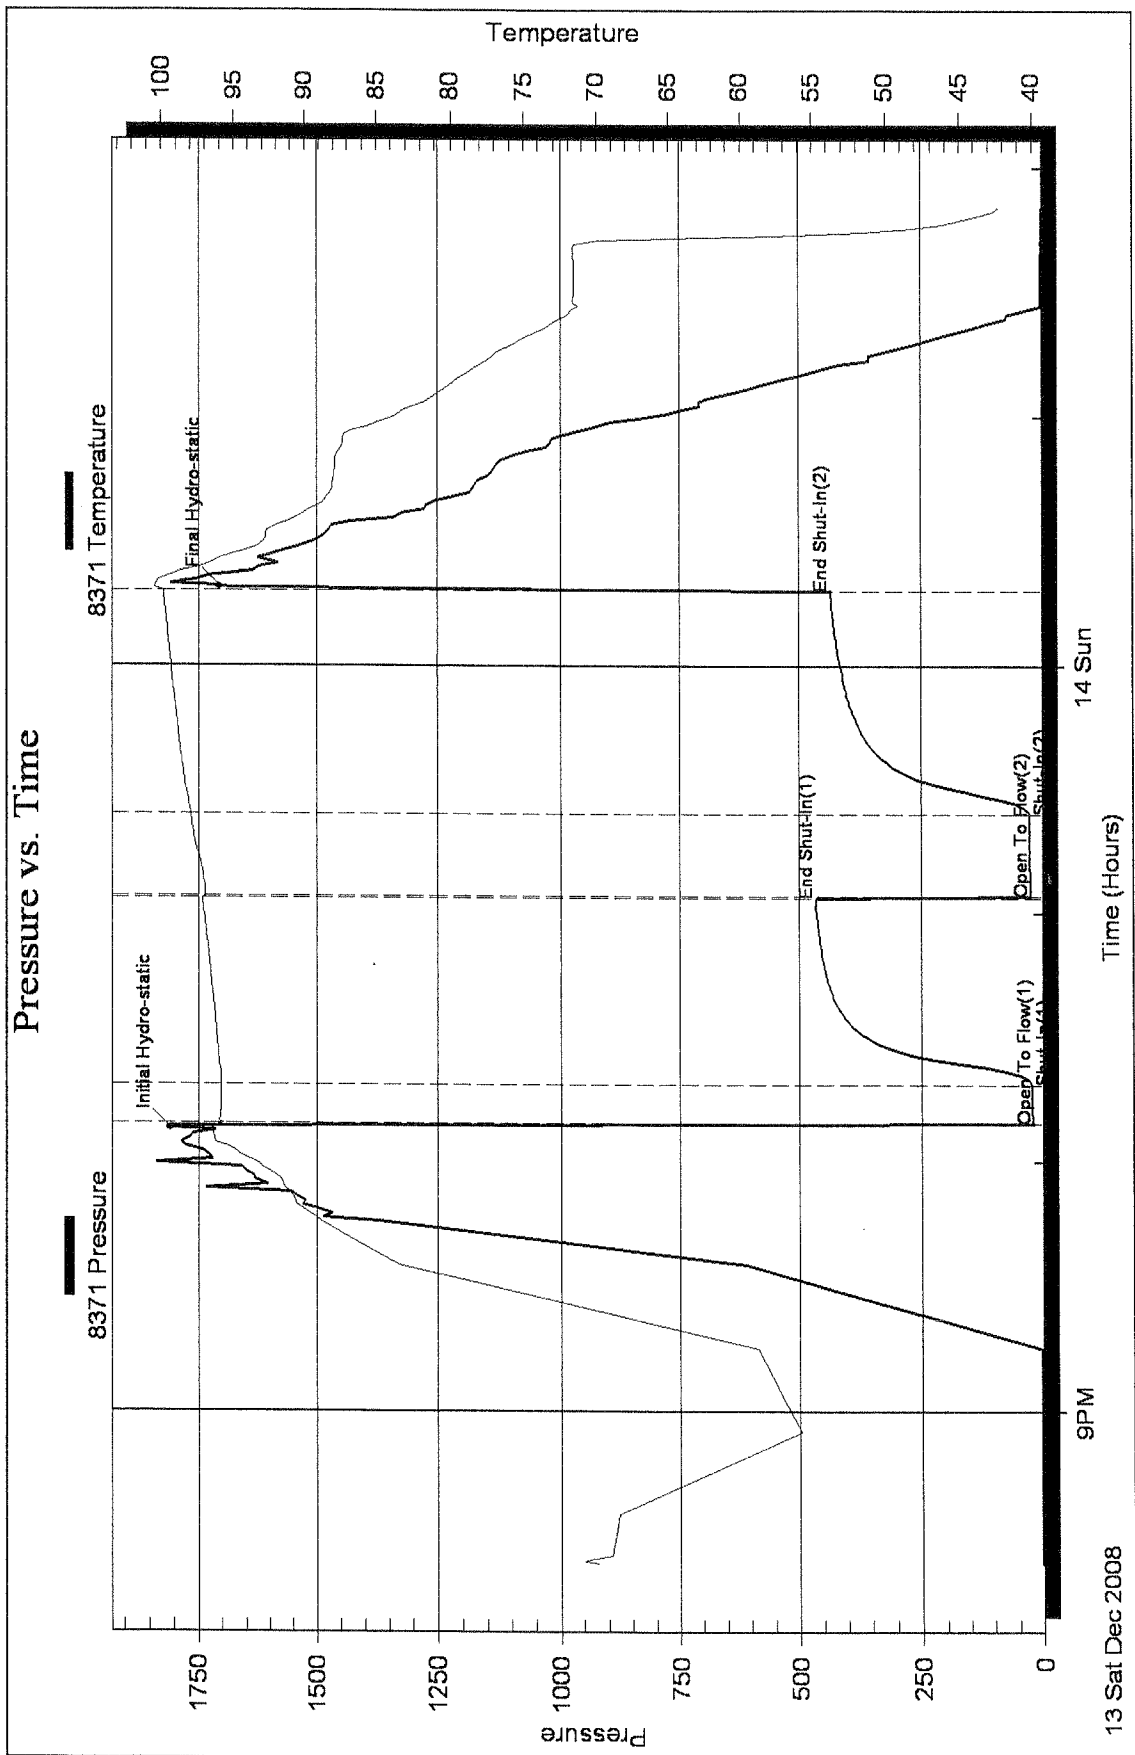

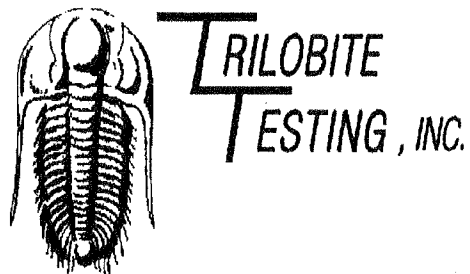

DRILL STEM TEST REPORT

Prepared For: **Thomason Petro**

PO Box 875
Hays, Ks
67601

ATTN: Keith Reavis

35-10s-20w Rooks KS


Keller #1

Start Date: 2008.12.14 @ 13:29:04

End Date: 2008.12.14 @ 21:43:58

Job Ticket #: 33766 DST #: 2

Trilobite Testing, Inc
PO Box 1733 Hays, KS 67601
ph: 785-625-4778 fax: 785-625-5620



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Thomason Petro
PO Box 875
Hays, Ks
67601
ATTN: Keith Reavis

Keller #1

35-10s-20w Rooks KS

Job Ticket: 33766

DST#: 2

Test Start: 2008.12.14 @ 13:29:04

GENERAL INFORMATION:

Formation: **LKC "H-K"**

Deviated: **No** Whipstock: **ft (KB)**

Time Tool Opened: 15:53:59

Time Test Ended: 21:43:58

Test Type: **Conventional Bottom Hole**

Tester: **Brian Fairbank**

Unit No: **41**

Interval: 3595.00 ft (KB) To 3690.00 ft (KB) (TVD)

Total Depth: **3690.00 ft (KB) (TVD)**

Hole Diameter: **7.88 inches** Hole Condition:

Reference Elevations: **2210.00 ft (KB)**

2202.00 ft (CF)

KB to GR/CF: **8.00 ft**

Serial #: 8371

Inside

Press@RunDepth: **53.66 psig @ 3598.00 ft (KB)**

Start Date: **2008.12.14**

End Date:

2008.12.14

Start Time: **13:29:04**

End Time:

21:43:58

Capacity: **7000.00 psig**

Last Calib.: **2008.12.14**

Time On Btm: **2008.12.14 @ 15:52:29**

Time Off Btm: **2008.12.14 @ 19:58:28**


TEST COMMENT: **IFP - weak blow throughout 3/4" - 2 1/2"**

ISI - no blow back

FFP - no blow 9 min. - 1"

FSI - no blow back

Pressure vs. Time

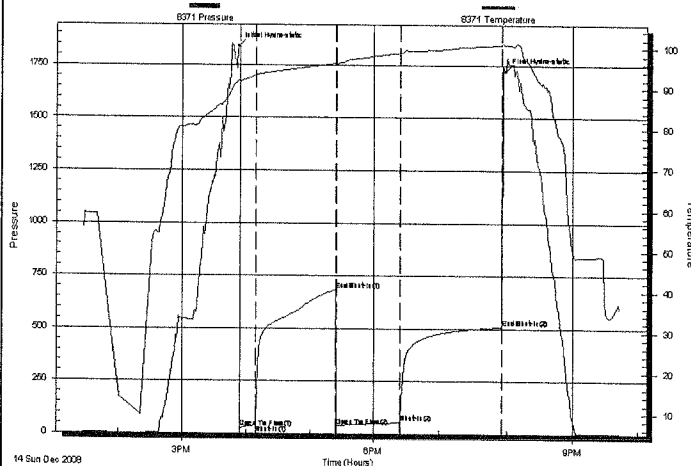

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1838.55	91.89	Initial Hydro-static
2	26.15	91.62	Open To Flow (1)
16	38.94	93.20	Shut-In(1)
92	684.12	96.21	End Shut-In(1)
92	37.11	95.69	Open To Flow (2)
152	53.66	98.76	Shut-In(2)
244	507.78	100.78	End Shut-In(2)
246	1721.66	100.89	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
60.00	mud 100%	0.56

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

TOOL DIAGRAM

Thomason Petro

Keller #1

PO Box 875

35-10s-20w Rooks KS

Hays, Ks

Job Ticket: 33766

DST#: 2

67601

ATTN: Keith Reavis

Test Start: 2008.12.14 @ 13:29:04

Tool Information


Drill Pipe:	Length: 3541.00 ft	Diameter: 3.80 inches	Volume: 49.67 bbl	Tool Weight:	2500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer:	25000.00 lb
Drill Collar:	Length: 31.00 ft	Diameter: 2.25 inches	Volume: 0.15 bbl	Weight to Pull Loose:	55000.00 lb
		Total Volume:	49.82 bbl	Tool Chased	0.00 ft
Drill Pipe Above KB:	4.00 ft			String Weight: Initial	52000.00 lb
Depth to Top Packer:	3595.00 ft			Final	52000.00 lb
Depth to Bottom Packer:	ft				
Interval between Packers:	95.00 ft				
Tool Length:	122.00 ft				
Number of Packers:	2	Diameter:	6.75 inches		

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
------------------	-------------	------------	----------	------------	----------------

Shut In Tool	5.00			3573.00	
Hydraulic tool	5.00			3578.00	
Jars	5.00			3583.00	
Safety Joint	2.00			3585.00	
Packer	5.00			3590.00	27.00 Bottom Of Top Packer
Packer	5.00			3595.00	
Stubb	1.00			3596.00	
Perforations	1.00			3597.00	
Change Over Sub	1.00			3598.00	
Recorder	0.00	8018	Inside	3598.00	
Recorder	0.00	8371	Inside	3598.00	
Blank Spacing	63.00			3661.00	
Change Over Sub	1.00			3662.00	
Perforations	25.00			3687.00	
Bullnose	3.00			3690.00	95.00 Bottom Packers & Anchor

Total Tool Length: 122.00



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

FLUID SUMMARY

Thomason Petro

Keller #1

PO Box 875

35-10s-20w Rooks KS

Hays, Ks

Job Ticket: 33766

DST#: 2

67601

Test Start: 2008.12.14 @ 13:29:04

ATTN: Keith Reavis

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 51.00 sec/qt

Cushion Volume:

bbl

Water Loss: 9.13 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 6400.00 ppm

Filter Cake: inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
60.00	mud 100%	0.559

Total Length: 60.00 ft

Total Volume: 0.559 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0


Serial #:


Laboratory Name:

Laboratory Location:

Recovery Comments:

Pressure vs. Time

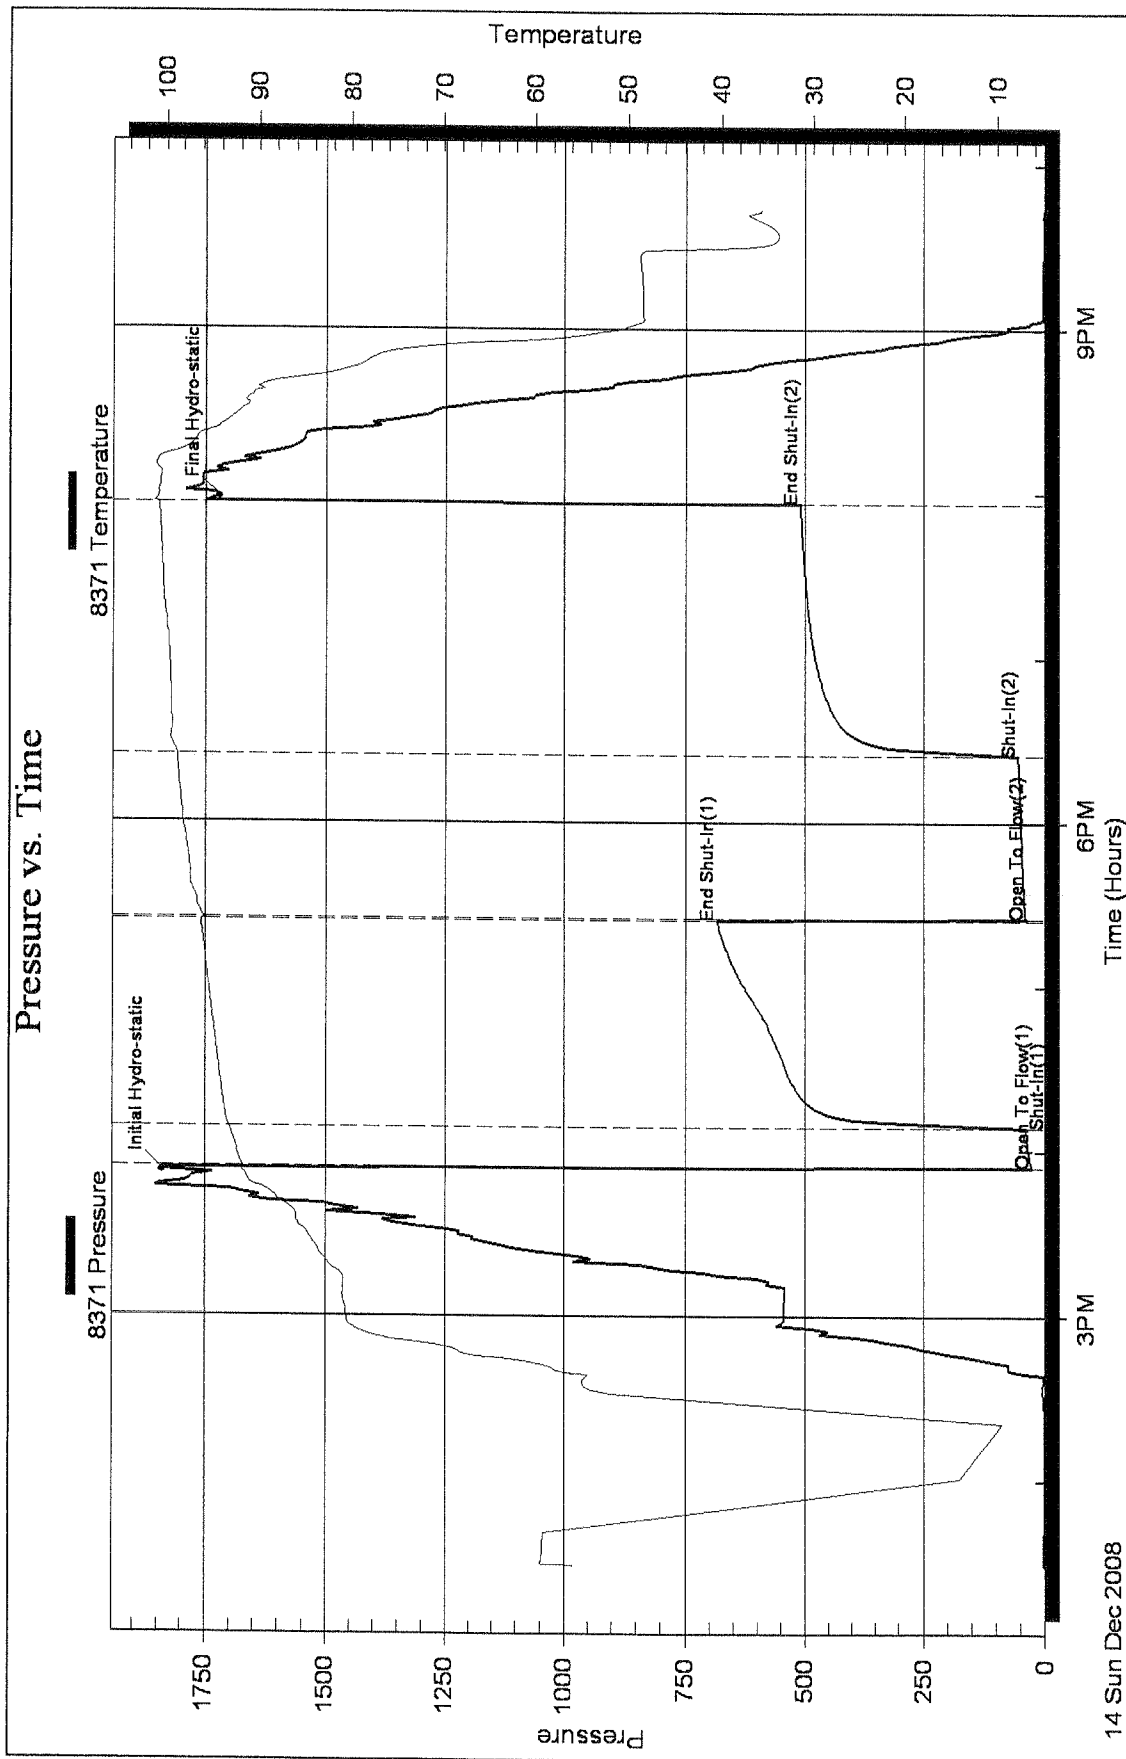

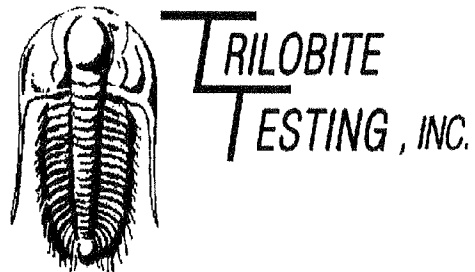

DRILL STEM TEST REPORT

Prepared For: **Thomason Petro**

PO Box 875
Hays, Ks
67601

ATTN: Keith Reavis

35-10s-20w Rooks KS

Keller #1

Start Date: 2008.12.15 @ 08:51:04

End Date: 2008.12.15 @ 15:47:28

Job Ticket #: 33767

DST #: 3

Trilobite Testing, Inc

PO Box 1733 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620

Thomason Petro

Keller #1

35-10s-20w Rooks KS

DST # 3

Arbuckle

2008.12.15



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

Thomason Petro

Keller #1

PO Box 875

Hays, KS

67601

ATTN: Keith Reavis

35-10s-20w Rooks KS

Job Ticket: 33767

DST#: 3

Test Start: 2008.12.15 @ 08:51:04

GENERAL INFORMATION:

Formation: **Arbuckle**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 11:32:29

Time Test Ended: 15:47:28

Test Type: Conventional Bottom Hole

Tester: Brian Fairbank

Unit No: 41

Interval: **3690.00 ft (KB) To 3796.00 ft (KB) (TVD)**

Total Depth: 3796.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition:

Reference Elevations: 2210.00 ft (KB)

2202.00 ft (CF)

KB to GR/CF: 8.00 ft

Serial #: 8371

Inside

Press@RunDepth: 51.94 psig @ 3693.00 ft (KB)

Start Date: 2008.12.15

End Date:

2008.12.15

Start Time: 08:51:04

End Time:

15:47:28

Capacity: 7000.00 psig

Last Calib.: 2008.12.15

Time On Btm: 2008.12.15 @ 11:31:29

Time Off Btm: 2008.12.15 @ 13:59:58


TEST COMMENT: IFP - weak blow throughout 3/4" - 2"

ISI - no blow back

FFP - 1/2" blow - died sur.

FSI - no blow back

Pressure vs. Time

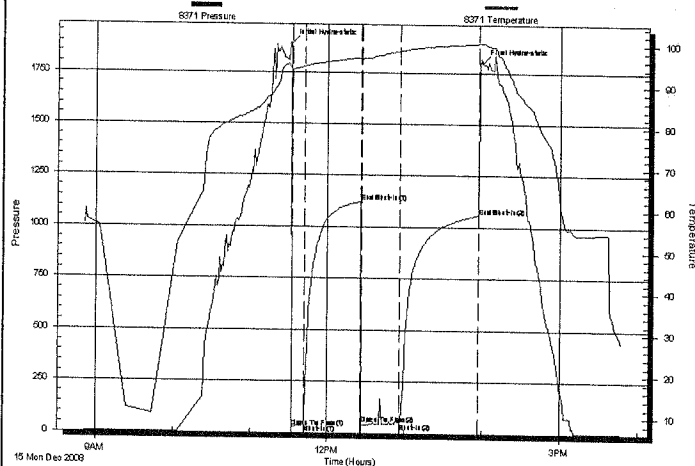

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1888.15	94.40	Initial Hydro-static
1	29.00	93.82	Open To Flow (1)
11	39.00	94.59	Shut-In(1)
55	1123.05	96.81	End Shut-In(1)
56	44.51	96.21	Open To Flow (2)
85	51.94	98.47	Shut-In(2)
146	1058.27	100.33	End Shut-In(2)
149	1797.31	100.46	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
42.00	VSOCM 2%O, 98%M	0.31
3.00	MO 80%O, 10%M	0.04

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

TOOL DIAGRAM

Thomason Petro

Keller #1

PO Box 875

Hays, Ks

67601

ATTN: Keith Reavis

35-10s-20w Rooks KS

Job Ticket: 33767

DST#: 3

Test Start: 2008.12.15 @ 08:51:04

Tool Information


Drill Pipe:	Length: 3637.00 ft	Diameter: 3.80 inches	Volume: 51.02 bbl	Tool Weight:	2500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer:	25000.00 lb
Drill Collar:	Length: 31.00 ft	Diameter: 2.25 inches	Volume: 0.15 bbl	Weight to Pull Loose:	65000.00 lb
		Total Volume:	51.17 bbl	Tool Chased	0.00 ft
Drill Pipe Above KB:	5.00 ft			String Weight: Initial	51000.00 lb
Depth to Top Packer:	3690.00 ft			Final	51000.00 lb
Depth to Bottom Packer:	ft				
Interval between Packers:	106.00 ft				
Tool Length:	133.00 ft				
Number of Packers:	2	Diameter:	6.75 inches		
Tool Comments:					

Tool Description

Length (ft) Serial No. Position Depth (ft) Accum. Lengths

Shut In Tool	5.00			3668.00	
Hydraulic tool	5.00			3673.00	
Jars	5.00			3678.00	
Safety Joint	2.00			3680.00	
Packer	5.00			3685.00	27.00 Bottom Of Top Packer
Packer	5.00			3690.00	
Stubb	1.00			3691.00	
Perforations	1.00			3692.00	
Change Over Sub	1.00			3693.00	
Recorder	0.00	8018	Inside	3693.00	
Recorder	0.00	8371	Inside	3693.00	
Blank Spacing	94.00			3787.00	
Change Over Sub	1.00			3788.00	
Perforations	5.00			3793.00	
Bullnose	3.00			3796.00	106.00 Bottom Packers & Anchor

Total Tool Length: 133.00



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

FLUID SUMMARY

Thomason Petro

Keller #1

PO Box 875

35-10s-20w Rooks KS

Hays, Ks

Job Ticket: 33767

DST#: 3

67601

ATTN: Keith Reavis

Test Start: 2008.12.15 @ 08:51:04

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

14 deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 51.00 sec/qt

Cushion Volume:

bbl

Water Loss: 9.15 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 6400.00 ppm

Filter Cake: inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
42.00	VSOCM 2%O, 98%M	0.307
3.00	MO 80%O, 10%M	0.042

Total Length: 45.00 ft

Total Volume: 0.349 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0


Serial #:


Laboratory Name:

Laboratory Location:

Recovery Comments:

Pressure vs. Time

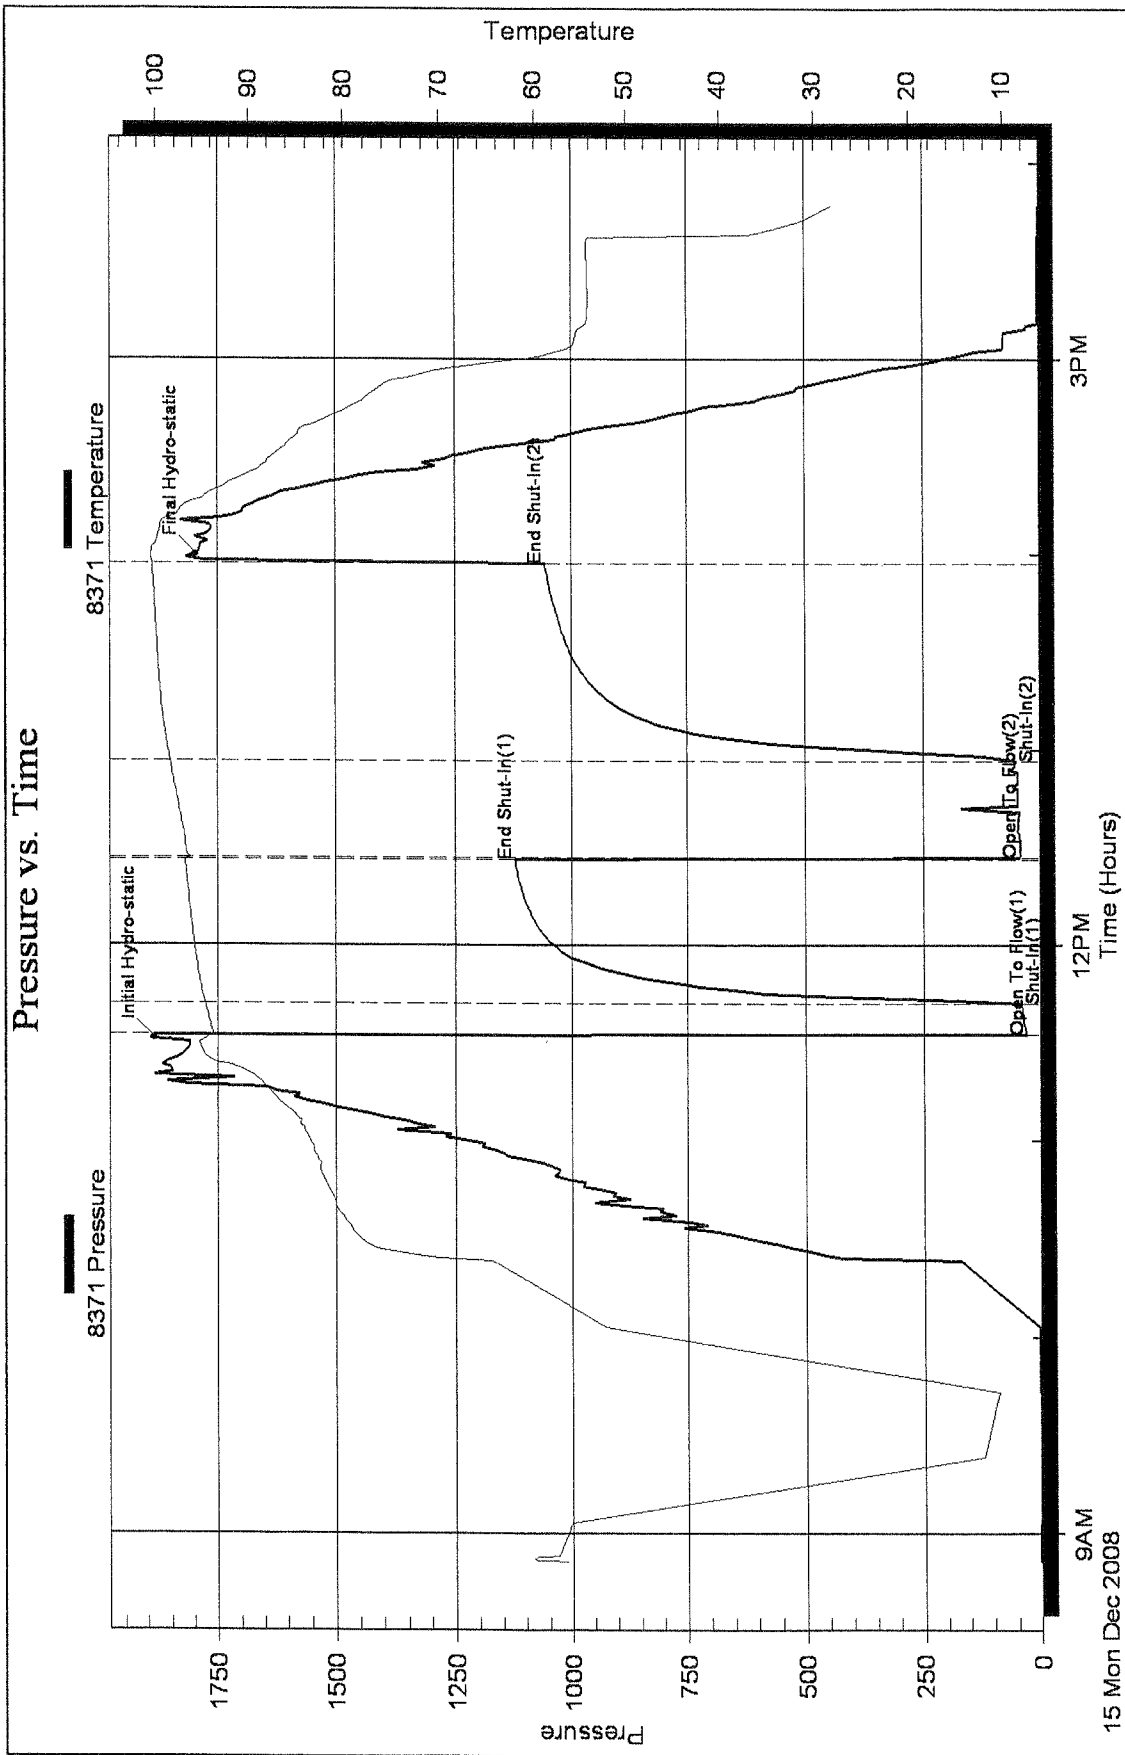



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

Prepared For: **Thomason Petro**

PO Box 875
Hays, Ks
67601

ATTN: Keith Reavis

35-10s-20w Rooks KS

Keller #1

Start Date: 2008.12.16 @ 00:08:23

End Date: 2008.12.16 @ 07:05:17

Job Ticket #: 33768

DST #: 4

Trilobite Testing, Inc
PO Box 1733 Hays, KS 67601
ph: 785-625-4778 fax: 785-625-5620

Thomason Petro

Keller #1

35-10s-20w Rooks KS

DST # 4

Arbuckle (2)

2008.12.16



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

Thomason Petro

Keller #1

PO Box 875

Hays, Ks

67601

ATTN: Keith Reavis

35-10s-20w Rooks KS

Job Ticket: 33768

DST#: 4

Test Start: 2008.12.16 @ 00:08:23

GENERAL INFORMATION:

Formation: **Arbuckle (2)**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 02:01:48

Time Test Ended: 07:05:17

Test Type: Conventional Bottom Hole

Tester: Brian Fairbank

Unit No: 41

Interval: **3796.00 ft (KB) To 3804.00 ft (KB) (TVD)**

Total Depth: 3804.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition:

Reference Elevations: 2210.00 ft (KB)

2202.00 ft (CF)

KB to GR/CF: 8.00 ft

Serial #: 8371 Inside

Press@RunDepth: 24.97 psig @ 3797.00 ft (KB)

Start Date: 2008.12.16

End Date:

2008.12.16

Start Time: 00:08:23

End Time:

07:05:17

Capacity: 7000.00 psig

Last Calib.: 2008.12.16

Time On Btm: 2008.12.16 @ 02:01:18


Time Off Btm: 2008.12.16 @ 05:13:47

TEST COMMENT: IFP - weak blow throughout 1/4" - 1/2"

ISI - no blow back

FFP - no blow 15 min. - sur blow

FSI - no blow back

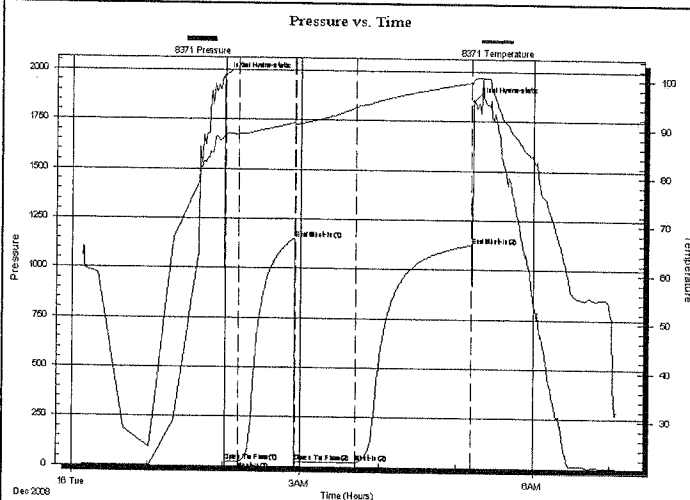

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1967.87	88.53	Initial Hydro-static
1	21.96	88.32	Open To Flow (1)
11	22.78	88.62	Shut-In (1)
54	1149.80	91.04	End Shut-In (1)
55	22.02	90.43	Open To Flow (2)
101	24.97	94.28	Shut-In (2)
191	1125.75	99.59	End Shut-In (2)
193	1852.78	100.27	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
3.00	mud w/ O spts. M100%	0.01

Gas Rates

Choke (Inches)	Pressure (psig)	Gas Rate (Mcf/d)
----------------	-----------------	------------------



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

TOOL DIAGRAM

Thomason Petro

Keller #1

PO Box 875

35-10s-20w Rooks KS

Hays, Ks

Job Ticket: 33768

DST#: 4

67601

Test Start: 2008.12.16 @ 00:08:23

ATTN: Keith Reavis


Tool Information

Drill Pipe:	Length: 3761.00 ft	Diameter: 3.80 inches	Volume: 52.76 bbl	Tool Weight: 2500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 25000.00 lb
Drill Collar:	Length: 31.00 ft	Diameter: 2.25 inches	Volume: 0.15 bbl	Weight to Pull Loose: 65000.00 lb
		Total Volume:	52.91 bbl	Tool Chased 0.00 ft
Drill Pipe Above KB:	23.00 ft			String Weight: Initial 52000.00 lb
Depth to Top Packer:	3796.00 ft			Final 52000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	8.00 ft			
Tool Length:	35.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		
Tool Comments:				

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
------------------	-------------	------------	----------	------------	----------------

Shut In Tool	5.00			3774.00	
Hydraulic tool	5.00			3779.00	
Jars	5.00			3784.00	
Safety Joint	2.00			3786.00	
Packer	5.00			3791.00	27.00 Bottom Of Top Packer
Packer	5.00			3796.00	
Stubb	1.00			3797.00	
Recorder	0.00	8018	Inside	3797.00	
Recorder	0.00	8371	Inside	3797.00	
Perforations	4.00			3801.00	
Bullnose	3.00			3804.00	8.00 Bottom Packers & Anchor

Total Tool Length: 35.00



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

FLUID SUMMARY

Thomason Petro

Keller #1

PO Box 875

35-10s-20w Rooks KS

Hays, Ks

Job Ticket: 33768

DST#: 4

67601

ATTN: Keith Reavis

Test Start: 2008.12.16 @ 00:08:23

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 10.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 44.00 sec/qt

Cushion Volume:

bbl

Water Loss: 11.16 in³

Gas Cushion Type:

Gas Cushion Pressure:

psig

Resistivity: ohm.m

Salinity: 6400.00 ppm

Filter Cake: inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
3.00	mud w/ O spts. M100%	0.015

Total Length: 3.00 ft

Total Volume: 0.015 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

Pressure vs. Time

