3-10-26W

SIDE ONE

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION

WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: license # 5146
name Rains & Williamson Oil Co., Inc.
address 435 Page Court, 220 W. Douglas
Wichita, KS 67202
City State Zip

Operator Contact Person Juanita Green
Phone 265-9686

Contractor: license #
name Rains & Williamson Oil Co., Inc.

Wellsite Geologist
Phone
PURCHASER

Designate **Type of Completion**
[X] New Well [ ] Re-Entry [ ] Workover

[ ] Oil [ ] SWD [ ] Temp Abd
[ ] Gas [ ] Inj [ ] Delayed Comp.
[X] [ ] Other (Core, Water Supply etc.)

SEP 23 1985
State Geological Survey
WICHITA BRANCH

If **OWWO:** old well info as follows:
Operator
Well Name
Comp. Date Old Total Depth

WELL HISTORY

Drilling Method: [X] Mud Rotary [ ] Air Rotary [ ] Cable

8-12-85	8-18-85	8-19-85
Spud Date	Date Reached TD	Completion Date

4090'	
Total Depth	PBTD

Amount of Surface Pipe Set and Cemented at 303' feet

Multiple Stage Cementing Collar Used? [ ] Yes [ ] No

If Yes, Show Depth Set feet

If alternate 2 completion, cement circulated
from feet depth to w/ SX cmt

API NO. 15 - 179-20,839

County Sheridan

N/2 NW NW (location) Sec 3 Twp 10S Rge 26 X

4950 Ft North from Southeast Corner of Sec
4620 Ft West from Southeast Corner of Sec
(Note: locate well in section plat below)


Lease Name Ziegler "B" Well# 1

Field Name

Producing Formation

Elevation: Ground 2574 KB 2582

Section Plat

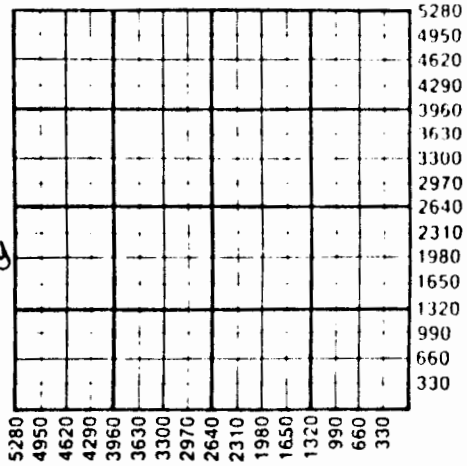

WATER SUPPLY INFORMATION

Source of Water:

Division of Water Resources Permit #

[ ] Groundwater Ft North From Southeast Corner
(Well) Ft. West From Southeast Corner
Sec Twp Rge [ ] East [ ] West

[ ] Surface Water Ft North From Southeast Corner
(Stream, Pond etc.) Ft West From Southeast
Sec Twp Rge [ ] East We

[ ] Other (explain)
(purchased from city, R.W.D.#)

Disposition of Produced Water: [ ] Disposal [ ] Repressuring

Docket #

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Build Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rules 82-3-130 and 82-3-107 apply.

Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3- for confidentiality in excess of 12 months.

78812

SIDE TWO

Operator Name Rains & Williamson Oil Co. Lease Name Ziegler "B" Well# 1 SEC 3 TWP 10S RGE 26W ☐ W

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem t giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached s level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. At extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken	☐ Yes	☐ No
Samples Sent to Geological Survey	☐ Yes	☐ No
Cores Taken	☐ Yes	☐ No

DST #1 - 3795-3850, 30 (30) 60 (60).
Rec. 806' MW. FP's 32-118, 172-356.
IBHP 1130, FBHP 1130.

DST #2 - 4028-4048, 30 (30) 30 (30).
Rec. 3' mud w/SO IN Tool. FP's
21-21, 21-21. IBHP 21, FBHP 21.

Formation Description
☒ Log ☐ Sample

Name	Top	Bott
Anhydrite	2213 (+369)	
B/Anhydrite	2247 (+335)	
Topeka	3580 (-998)	
Heebner	3794 (-1212)	
Toronto	3817 (-1235)	
Lansing	3836 (-1254)	

SEP 23 1985
State Geological Survey
WICHITA BRANCH

CASING RECORD ☒ new ☐ used
Report all strings set - conductor, surface, intermediate, production, etc.

Purpose of string	size hole drilled	size casing set (in O.D.)	weight lbs/ft.	setting depth	type of cement	# sacks used	type and percent additives
~~Production~~ Surface	12¼"	8 5/8"	23#	303'	60/40 poz.	210 sx.	2% gel,

PERFORATION RECORD

shots per foot	specify footage of each interval perforated

Acid, Fracture, Shot, Cement Squeeze Record

(amount and kind of material used)	Depth

P1

DRILLER'S LOG

COMPANY: Rains & Williamson Oil Co., Inc.

SEC. 3 T. 10S R. 26W

LOC. N/2 NW NW

WELL NAME: Ziegler "B" #1

COUNTY: Sheridan

RIG NO. #11

TOTAL DEPTH 4090'

ELEVATION 2574 GL 2582 KB

COMMENCED: 8-12-85 COMPLETED: 8-19-85

CONTRACTOR: Rains & Williamson Oil Co., Inc.

CASING RECORD:

SURFACE: 8 5/8" @ 303' w/210 sx. 60/40 poz., 2% gel, 3% cc.

PRODUCTION: D&A

SEP 2 3 1985
State Geological Survey
WICHITA, BRANCH

LOG

(Figures Indicate Bottom of Formations)

Shale	316
Shale & Shells	710
Shale	1813
Sand	1980
Shale	2610
Lime	2756
Lime & Shale	3193
Shale & Lime	3382
Lime & Shale	3570
Lime	4090
ROTARY TOTAL DEPTH	4090

RECEIVED
STATE CORPORATION COMMISSION
SEP 16 1985
CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas)
SS:
COUNTY OF Sedgwick)